

# 2SD968, 2SD968A

## Silicon NPN epitaxial planer type

For low-frequency driver amplification

Complementary to 2SB789 and 2SB789A

### Features

- High collector to emitter voltage  $V_{CE0}$ .
- Large collector power dissipation  $P_C$ .
- Mini Power type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

### Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	$V_{CBO}$	100	V
2SD968			
2SD968A		120	
Collector to emitter voltage	$V_{CEO}$	100	V
2SD968			
2SD968A		120	
Emitter to base voltage	$V_{EBO}$	5	V
Peak collector current	$I_{CP}$	1	A
Collector current	$I_C$	0.5	A
Collector power dissipation	$P_C^*$	1	W
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55 ~ +150	°C

\* Printed circuit board: Copper foil area of 1cm<sup>2</sup> or more, and the board thickness of 1.7mm for the collector portion


### Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector to emitter voltage	$V_{CEO}$	$I_C = 100\mu A, I_B = 0$	100			V
2SD968						
2SD968A			120			
Emitter to base voltage	$V_{EBO}$	$I_E = 10\mu A, I_C = 0$	5			V
Forward current transfer ratio	$h_{FE1}^{*1}$	$V_{CE} = 10V, I_C = 150mA^{*2}$	90		220	
	$h_{FE2}$	$V_{CE} = 5V, I_C = 500mA^{*2}$	50	100		
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500mA, I_B = 50mA^{*2}$		0.2	0.6	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 500mA, I_B = 50mA^{*2}$		0.85	1.2	V
Transition frequency	$f_T$	$V_{CB} = 10V, I_E = -50mA, f = 200MHz$		120		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = 10V, I_E = 0, f = 1MHz$		11	20	pF

\*1  $h_{FE1}$  Rank classification


Rank	Q	R	
$h_{FE1}$	90 ~ 155	130 ~ 220	
Marking	2SD968	WQ	WR
Symbol	2SD968A	VQ	VR

\*2 Pulse measurement

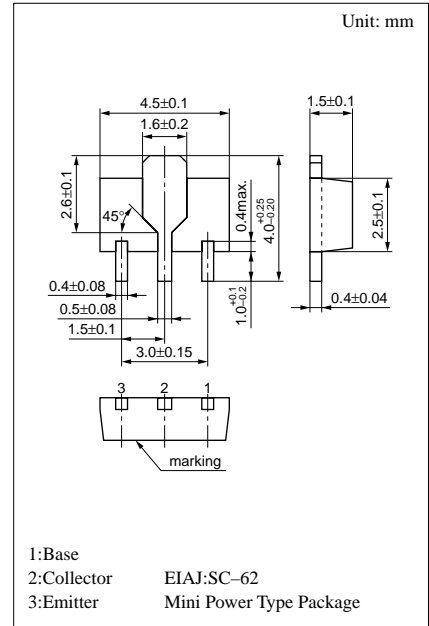


Marking symbol : W(2SD968)  
V(2SD968A)


$P_C - T_a$

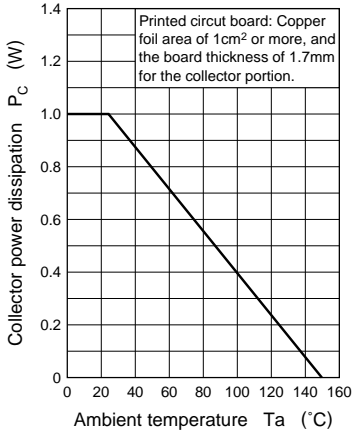


$I_C - V_{CE}$

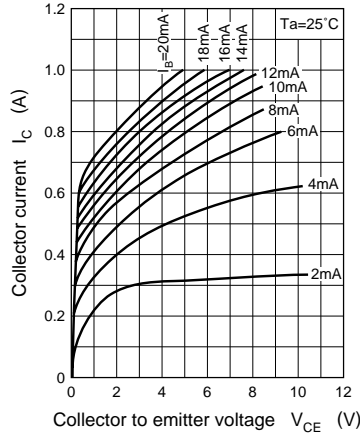


$I_C - I_B$

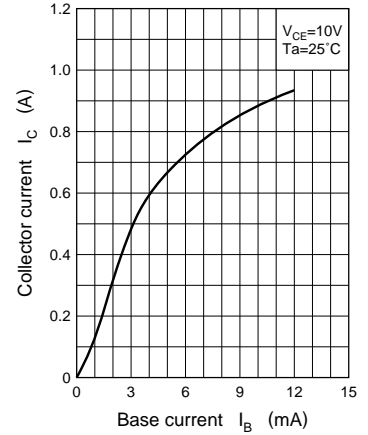


$V_{CE(sat)} - I_C$

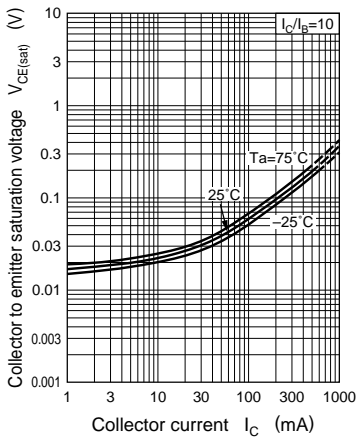


$V_{BE(sat)} - I_C$

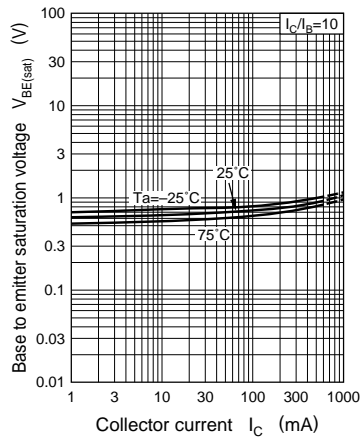

$h_{FE} - I_C$

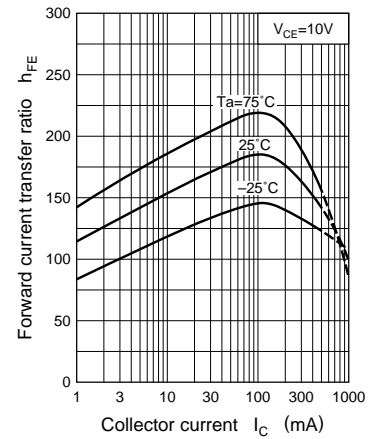

$f_T - I_E$

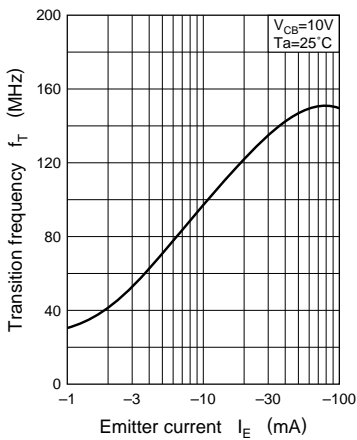

$C_{ob} - V_{CB}$

