

## FEATURES

- Supply Current 150 $\mu$ A (Max per Amplifier) Guaranteed Over Temperature
- Offset Voltage 3 $\mu$ V (Max)
- Offset Voltage Drift 30nV/ $^{\circ}$ C (Max)
- Common Mode Input Range from V<sup>-</sup> to V<sup>+</sup> –0.5V
- Output Swings Rail-to-Rail
- Voltage Gain: 140dB (Typ)
- PSRR and CMRR: 130dB (Typ)
- Input Bias Current: 1pA (Typ, 25 $^{\circ}$ C)
- Noise: 1.6 $\mu$ V<sub>P-P</sub> (0.01Hz to 10Hz Typ)
- Supply Operation:  
2.7V to 6V (LTC2054/LTC2055)  
2.7V to  $\pm$ 5.5V (LTC2054HV/LTC2055HV)
- Low Profile (1mm) SOT-23, MS8 and 3mm  $\times$  3mm  $\times$  0.8mm DFN Packages

## APPLICATIONS

- Thermocouple Amplifiers
- Electronic Scales
- Medical Instrumentation
- Strain Gauge Amplifiers
- High Resolution Data Acquisition
- DC Accurate RC Active Filters
- Low Side Current Sense
- Battery-Powered Systems

## DESCRIPTION

The LTC<sup>®</sup>2054/LTC2055 are low power, low noise single/dual zero-drift operational amplifiers available in the SOT-23 (ThinSOT<sup>™</sup>) and MS8 packages. For space limited applications, the LTC2055 is also available in a 3mm  $\times$  3mm  $\times$  0.8mm dual fine pitch leadless package (DFN). They operate from a single 2.7V minimum supply and support  $\pm$ 5V applications. The current consumption is typically 150 $\mu$ A for the LTC2054 and 130 $\mu$ A/amp for the LTC2055.


The LTC2054/LTC2055, despite their miniature size, feature uncompromising DC performance. The typical input offset voltage and offset drift are 0.5 $\mu$ V and 25nV/ $^{\circ}$ C. The almost zero DC offset and drift are supported with a power supply rejection ratio (PSRR) and common mode rejection ratio (CMRR) of more than 130dB.

The input common mode voltage ranges from the negative supply up to typically 0.5V from the positive supply. The open-loop gain is typically 140dB. The LTC2054/LTC2055 also feature a 1.6 $\mu$ V<sub>P-P</sub> DC to 10Hz noise and a 500kHz gain-bandwidth product.


 LT and LTC are registered trademarks of Linear Technology Corporation.  
ThinSOT is a trademark of Linear Technology Corporation

## TYPICAL APPLICATION

–48V Low Side Precision Current Sense

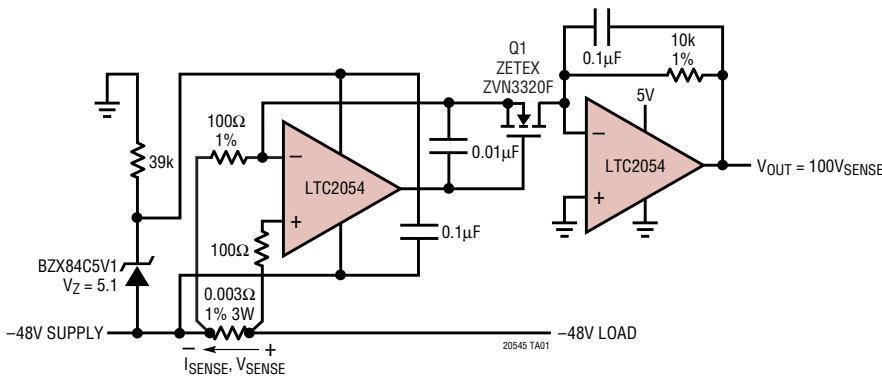

Supply Current (per Amplifier)



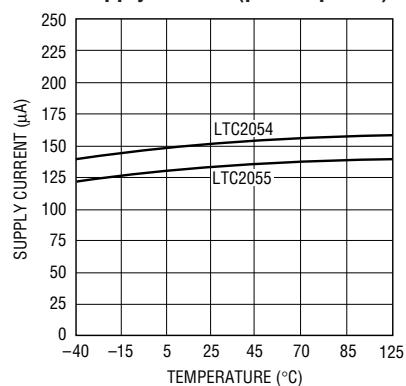


# LTC2054/LTC2055

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Total Supply Voltage ( $V^+$ to $V^-$ )	Operating Temperature Range .....	-40°C to 125°C
LTC2054/LTC2055 ..... 7V	Specified Temperature Range (Note 3) .....	-40°C to 125°C
LTC2054HV/LTC2055HV ..... 12V	Storage Temperature Range .....	-65°C to 150°C
Input Voltage ..... ( $V^+ + 0.3V$ ) to ( $V^- - 0.3V$ )	DD Package .....	-65°C to 125°C
Input Current ..... $\pm 10\text{mA}$	Lead Temperature (Soldering, 10 sec) .....	300°C
Output Short-Circuit Duration .....		Indefinite

## PACKAGE/ORDER INFORMATION

 TOP VIEW		 TOP VIEW	 TOP VIEW		
ORDER PART NUMBER*	S5 PART MARKING	ORDER PART NUMBER*	DD PART MARKING	ORDER PART NUMBER*	MS8 PART MARKING
LTC2054CS5	LTAGB	LTC2055CDD	LBCW	LTC2055CMS8	LTBCR
LTC2054HVCS5	LTAGD	LTC2055HVCDD	LBCX	LTC2055HVCMS8	LTBCT
LTC2054IS5	LTAGB	LTC2055IDD	LBCW	LTC2055IMS8	LTBCR
LTC2054HVIS5	LTAGD	LTC2055HVIDD	LBCX	LTC2055HVIMS8	LTBCT
LTC2054HS5	LTAGB	LTC2055HDD	LBCW	LTC2055HMS8	LTBCR
LTC2054HVHS5	LTAGD	LTC2055HVHDD	LBCX	LTC2055HVHMS8	LTBCT

\*The temperature grade (C, I or H) is indicated on the shipping container. Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS (LTC2054/LTC2055, LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$ . $V_S = 3\text{V}, 5\text{V}$ unless otherwise noted. (Note 3)

SYMBOL	PARAMETER	CONDITIONS	LTC2054C/LTC2055C LTC2054I/LTC2055I			LTC2054H/LTC2055H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
$I_S$	Supply Current (LTC2054)	No Load, $V_S = 3\text{V}$	●	140	175	140	180	180	$\mu\text{A}$
		No Load, $V_S = 5\text{V}$	●	150	175	150	180	180	$\mu\text{A}$
$I_S$	Supply Current Per Amplifier (LTC2055)	No Load, $V_S = 3\text{V}$	●	130	150	130	155	155	$\mu\text{A}$
		No Load, $V_S = 5\text{V}$	●	135	150	135	155	155	$\mu\text{A}$
$V_{OS}$	Input Offset Voltage	(Note 2)		$\pm 0.5$	$\pm 3$	$\pm 0.5$	$\pm 3$	$\pm 3$	$\mu\text{V}$
$\Delta V_{OS}/\Delta T$	Average Input Offset Drift	(Note 2)	●	0.02	$\pm 0.03$	0.02	$\pm 0.05$	$\pm 0.05$	$\mu\text{V}/^\circ\text{C}$
	Long-Term Offset Drift			50		50			$\text{nV}/\sqrt{\text{mo}}$
$I_B$	Input Bias Current (Note 4)	$V_S = 3\text{V}$	●	$\pm 1$		$\pm 1$		3000	$\text{pA}$
		$V_S = 5\text{V}$	●	$\pm 1$	$\pm 150$	$\pm 1$	$\pm 150$	3000	$\text{pA}$

20545fa

## ELECTRICAL CHARACTERISTICS

(LTC2054/LTC2055, LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 3\text{V}, 5\text{V}$  unless otherwise noted. (Note 3)

SYMBOL	PARAMETER	CONDITIONS	LTC2054C/LTC2055C LTC2054I/LTC2055I			LTC2054H/LTC2055H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
$I_{OS}$	Input Offset Current (Note 4)	$V_S = 3\text{V}$ $V_S = 3\text{V}$	●	$\pm 2$	$\pm 300$	$\pm 2$	$\pm 700$	$\pm 700$	pA pA
		$V_S = 5\text{V}$ $V_S = 5\text{V}$	●	$\pm 2$	$\pm 300$	$\pm 2$	$\pm 700$	$\pm 700$	pA pA
$e_n$	Input Noise Voltage	$R_S = 100\Omega$ , DC to 1Hz $R_S = 100\Omega$ , DC to 10Hz		0.6 1.6		0.6 1.6		$\mu\text{V}_{\text{P-P}}$ $\mu\text{V}_{\text{P-P}}$	
CMRR	Common Mode Rejection Ratio	$V_{CM} = \text{GND to } V^+ - 0.7\text{V}$ $V_S = 3\text{V}$	●	115 110	130	115 110	130	$\text{dB}$ $\text{dB}$	
		$V_{CM} = \text{GND to } V^+ - 0.7\text{V}$ $V_S = 5\text{V}$	●	120 115	130	120 115	130	$\text{dB}$ $\text{dB}$	
PSRR	Power Supply Rejection Ratio	$V_S = 2.7\text{V to } 6\text{V}$	●	120 115	130	120 115	130	$\text{dB}$ $\text{dB}$	
$A_{VOL}$	Large-Signal Voltage Gain	$R_L = 100\text{k}$ , $V_S = 3\text{V}$ , $V_{OUT} = V_S/2$	●	120 115	135	120 115	135	$\text{dB}$ $\text{dB}$	
		$R_L = 100\text{k}$ , $V_S = 5\text{V}$ , $V_{OUT} = V_S/2$	●	125 120	140	125 120	140	$\text{dB}$ $\text{dB}$	
$V_{OUT}$	Output Voltage Swing High	$R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$ $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$	●	2.87 2.85	2.89 2.84	2.87 2.84	2.89 2.83	V V	
		$R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$ $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$	●	4.80 4.75	4.83 4.70	4.80 4.70	4.83 4.73	V V	
		$R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$ $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$	●	2.98 2.975	2.99 2.97	2.98 2.97	2.99 2.96	V V	
		$R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$ $R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$	●	4.985 4.980	4.99 4.970	4.985 4.970	4.99 4.96	V V	
$V_{OUT}$	Output Voltage Swing Low	$R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$ $R_L = 5\text{k to GND}$ , $V_S = 3\text{V}$	●	2 10	8	3 10	8 10	mV mV	
		$R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$ $R_L = 5\text{k to GND}$ , $V_S = 5\text{V}$	●	2 10	8	3 10	8 10	mV mV	
		$R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$ $R_L = 100\text{k to GND}$ , $V_S = 3\text{V}$	●	2 10	8	3 10	8 10	mV mV	
		$R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$ $R_L = 100\text{k to GND}$ , $V_S = 5\text{V}$	●	2 10	8	3 10	8 10	mV mV	
SR	Slew Rate			0.5		0.5		$\text{V}/\mu\text{s}$	
GBW	Gain Bandwidth Product			500		500		kHz	
$f_S$	Internal Sampling Frequency			1		1		kHz	

# LTC2054/LTC2055

## ELECTRICAL CHARACTERISTICS (LTC2054HV/LTC2055HV) The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$ . $V_S = \pm 5\text{V}$ unless otherwise noted. (Note 3)

SYMBOL	PARAMETER	CONDITIONS	LTC2054HVC/LTC2055HVC LTC2054HVI/LTC2055HVI			LTC2054HVH/LTC2055HVH			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
$I_S$	Supply Current	No Load (LTC2054)	●	175	210	175	215	$\mu\text{A}$	
$I_S$	Supply Current (Per Amplifier)	No Load (LTC2055)	●	150	180	150	185	$\mu\text{A}$	
$V_{OS}$	Input Offset Voltage	(Note 2)		$\pm 0.5$	$\pm 5$	$\pm 0.5$	$\pm 5$	$\mu\text{V}$	
$\Delta V_{OS}/\Delta T$	Average Input Offset Drift	(Note 2)	●	0.025	$\pm 0.03$	0.025	$\pm 0.05$	$\mu\text{V}/^\circ\text{C}$	
	Long-Term Offset Drift			50		50		$\text{nV}/\sqrt{\text{mo}}$	
$I_B$	Input Bias Current (Note 4)		●	$\pm 3$	$\pm 150$	$\pm 3$	$\pm 3000$	$\text{pA}$	$\text{pA}$
$I_{OS}$	Input Offset Current (Note 4)		●	$\pm 6$	$\pm 300$	$\pm 6$	$\pm 700$	$\text{pA}$	$\text{pA}$
$e_n$	Input Noise Voltage	$R_S = 100\Omega$ , DC to 1Hz $R_S = 100\Omega$ , DC to 10Hz		0.6		0.6		$\mu\text{V}_{\text{P-P}}$	
				1.6		1.6		$\mu\text{V}_{\text{P-P}}$	
CMRR	Common Mode Rejection Ratio	$V_{CM} = \text{GND}$ to $V^+ - 0.9$	●	120	130	120	130	$\text{dB}$	
				115		115		$\text{dB}$	
PSRR	Power Supply Rejection Ratio	$V_S = 2.7\text{V}$ to $11\text{V}$	●	120	130	120	130	$\text{dB}$	
				115		115		$\text{dB}$	
AVOL	Large-Signal Voltage Gain	$R_L = 100\text{k}$ , $V_{OUT} = \text{GND}$	●	125	140	125	140	$\text{dB}$	
				120		120		$\text{dB}$	
$V_{OUT}$	Maximum Output Voltage Swing	$R_L = 5\text{k}$ to GND $R_L = 5\text{k}$ to GND		$\pm 4.78$	$\pm 4.82$	$\pm 4.78$	$\pm 4.82$	V	
			●	$\pm 4.75$		$\pm 4.70$		V	
		$R_L = 100\text{k}$ to GND $R_L = 100\text{k}$ to GND	●	$\pm 4.98$	$\pm 4.99$	$\pm 4.98$	$\pm 4.99$	V	
			●	$\pm 4.975$		$\pm 4.97$		V	
SR	Slew Rate			0.5		0.5		$\text{V}/\mu\text{s}$	
GBW	Gain Bandwidth Product			500		500		kHz	
$f_S$	Internal Sampling Frequency			1		1		kHz	

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** These parameters are guaranteed by design. Thermocouple effects preclude measurements of these voltage levels during automated testing.










**Note 3:** All versions of the LTC2054/LTC2055 are designed, characterized and expected to meet the extended temperature limits of  $-40^\circ\text{C}$  and  $125^\circ\text{C}$ . The LTC2054C/LTC2055C/LTC2054HVC/LTC2055HVC are guaranteed to meet the temperature limits of  $0^\circ\text{C}$  and  $70^\circ\text{C}$ . The LTC2054I/LTC2055I/LTC2054HVI/LTC2055HVI are guaranteed to meet temperature

limits of  $-40^\circ\text{C}$  and  $85^\circ\text{C}$ . The LTC2054H/LTC2055HVH and LTC2054H/LTC2055HVH are guaranteed to meet the temperature limits of  $-40^\circ\text{C}$  and  $125^\circ\text{C}$ .

**Note 4:** Limit is determined by high speed automated test capability. See Typical Characteristic curves for actual typical performance. For tighter specifications, please consult Linear Technology Marketing.

**Note 5:** The  $\theta_{JA}$  specified for the DD package is with minimal PCB heat spreading metal. Using expanded metal area on all layers of a board reduces this value.


## TYPICAL PERFORMANCE CHARACTERISTICS

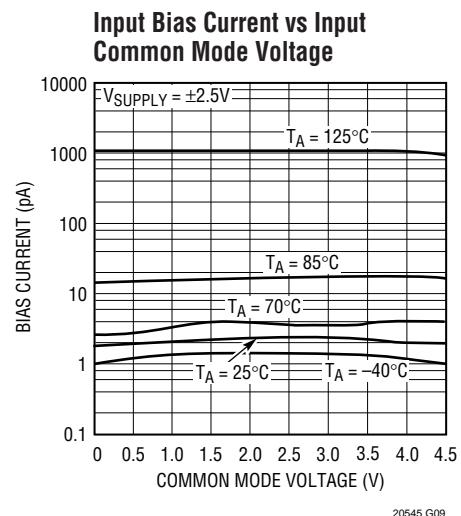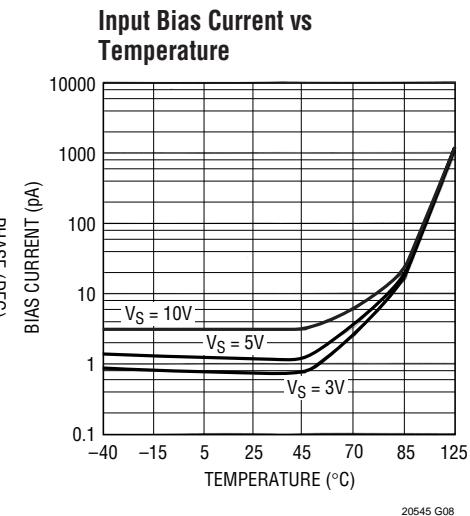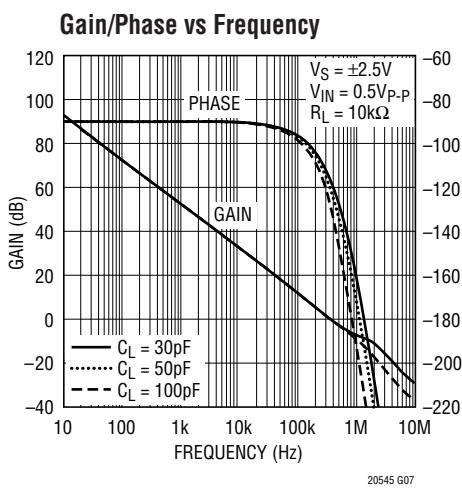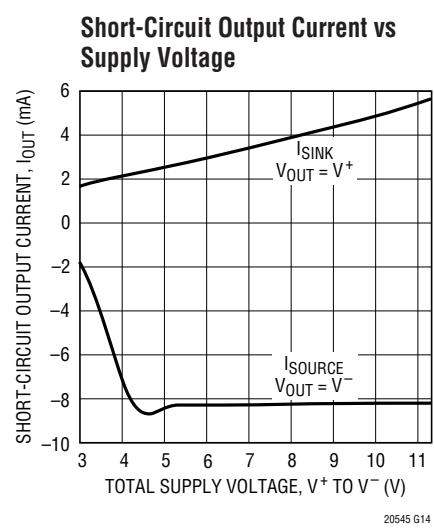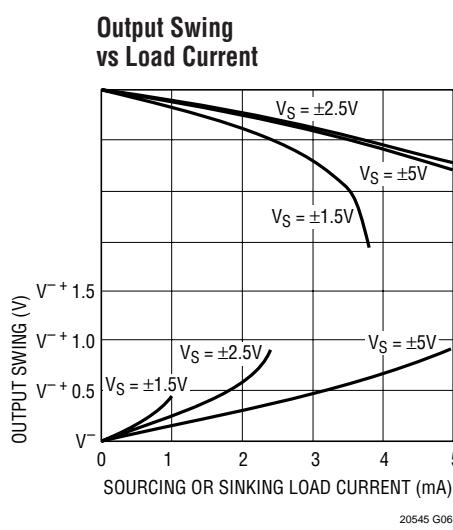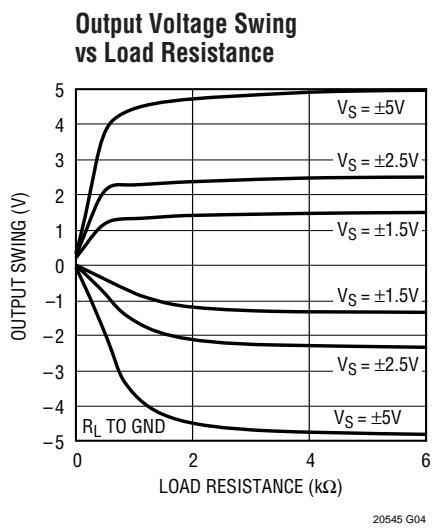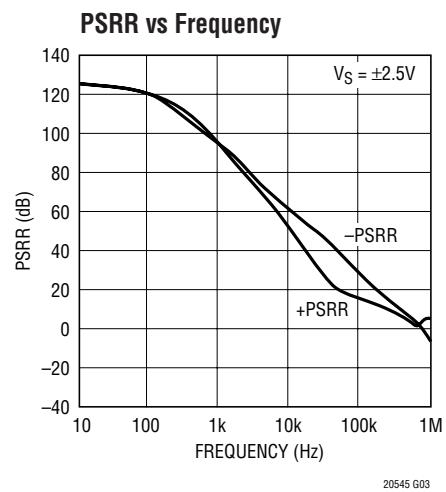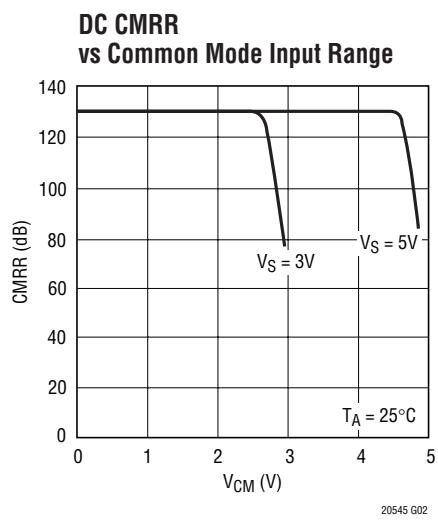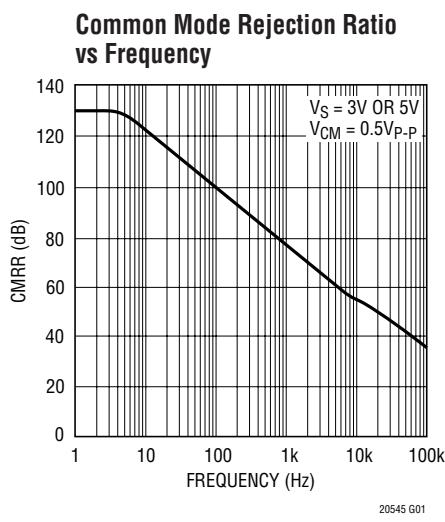

# LTC2054/LTC2055


## TYPICAL PERFORMANCE CHARACTERISTICS

**Transient Response**

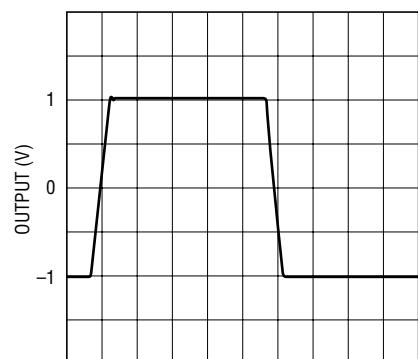


$A_V = 1$   
 $R_L = 100k$   
 $C_L = 50pF$   
 $V_S = \pm 2.5V$   
 $V_{IN} = 10kHz\ 2V_{P-P}$

**Output Overload Recovery**

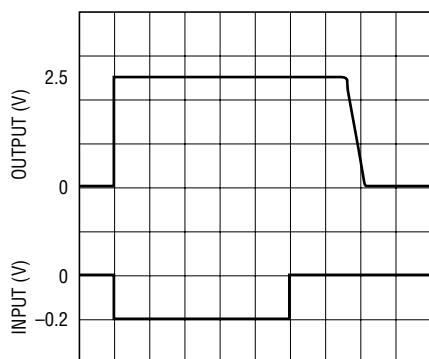


$A_V = -100$   
 $R_L = 100k$   
 $V_S = \pm 2.5V$

**Output Overload Recovery**

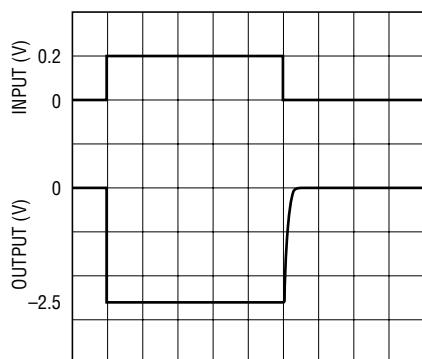


$A_V = -100$   
 $R_L = 100k$   
 $V_S = \pm 2.5V$

**Common Mode Input Range vs Supply Voltage**

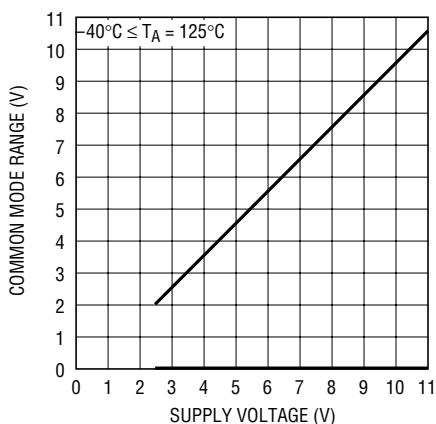


20545 G13

**LTC2054 Supply Current vs Supply Voltage**

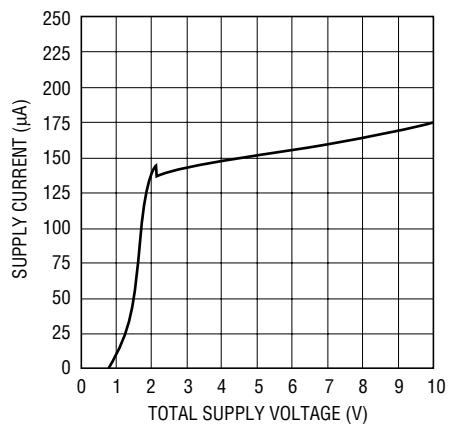


20545 G15

**LTC2054 Supply Current vs Temperature**

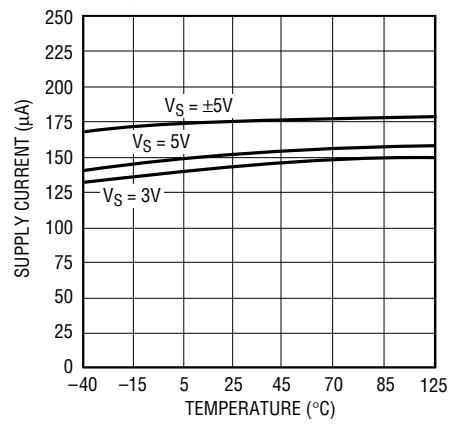


20545 G16

**LTC2055 Supply Current (Per Amplifier) vs Supply Voltage**

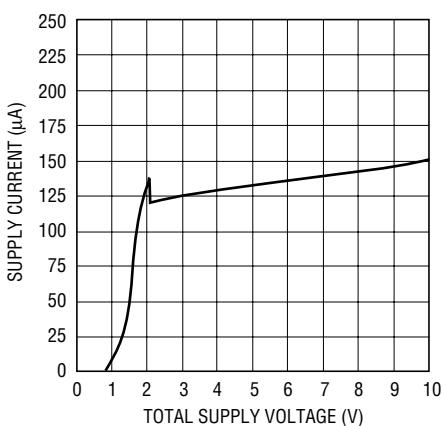


20545 G17

**LTC2055 Supply Current (Per Amplifier) vs Temperature**

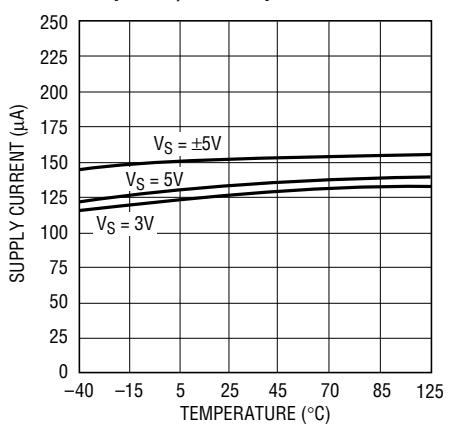

20545 G18

**Noise Spectrum**

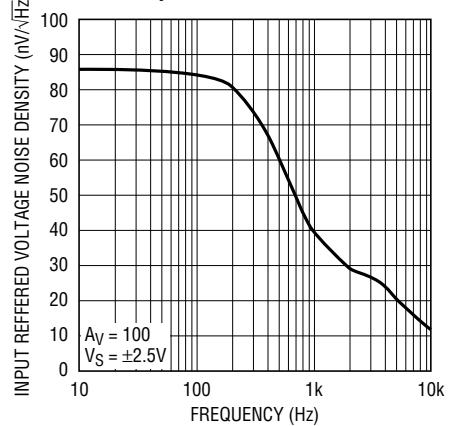


20545 G19

20545fa


**TEST CIRCUITS**

**Electrical Characteristics  
Test Circuit**

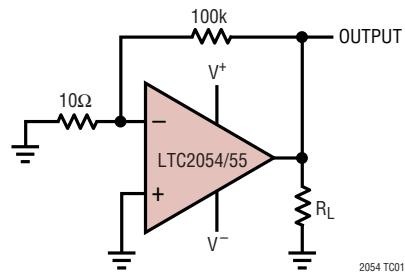

2054 TC01

**DC-10Hz Noise Test Circuit**

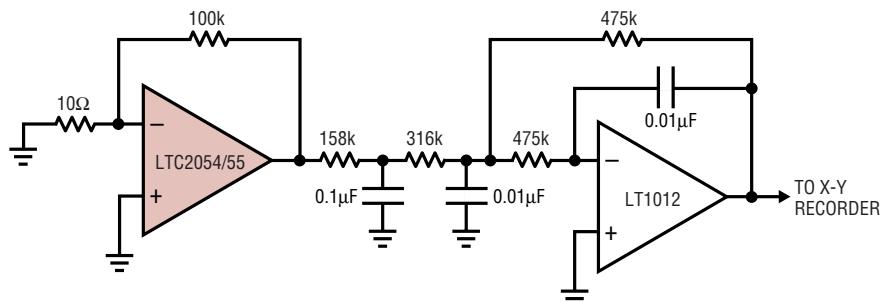

FOR 1Hz NOISE BW INCREASE ALL THE CAPACITORS BY A FACTOR OF 10.

2054 TC02

20545fa

## APPLICATIONS INFORMATION

### Clock Feedthrough, Input Bias Current

The LTC2054 and LTC2055 use auto-zeroing circuitry to achieve an almost zero DC offset over temperature, common mode voltage, and power supply voltage. The frequency of the clock used for auto-zeroing is typically 1.0kHz. The term clock feedthrough is broadly used to indicate visibility of this clock frequency in the op amp output spectrum. There are typically two types of clock feedthrough in auto zeroed op amps like the LTC2054/LTC2055.


The first form of clock feedthrough is caused by the settling of the internal sampling capacitor and is input referred; that is, it is multiplied by the closed loop gain of the op amp. This form of clock feedthrough is independent of the magnitude of the input source resistance or the magnitude of the gain setting resistors. The LTC2054/LTC2055 have a residue clock feedthrough of less than  $0.2\mu V_{RMS}$  input referred at 1.0kHz.

The second form of clock feedthrough is caused by the small amount of charge injection occurring during the sampling and holding of the op amp's input offset voltage. The current spikes are multiplied by the impedance seen at the input terminals of the op amp, appearing at the output multiplied by the closed loop gain of the op amp. To reduce this form of clock feedthrough, use smaller valued gain setting resistors and minimize the source resistance at the input. If the resistance seen at the inputs is less than 10k, this form of clock feedthrough is less than the amount of residue clock feedthrough from the first form described above.

Placing a capacitor across the feedback resistor reduces either form of clock feedthrough by limiting the bandwidth of the closed loop gain.


Input bias current is defined as the DC current into the input pins of the op amp. The same current spikes that

LTC2054/LTC2055 DC to 1Hz Noise

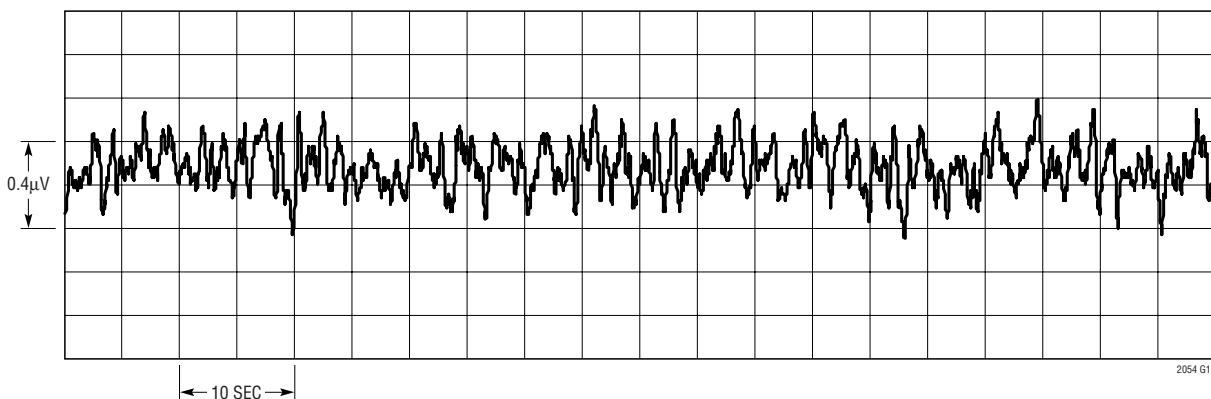

2054 G16

LTC2054/LTC2055 DC to 10Hz Noise

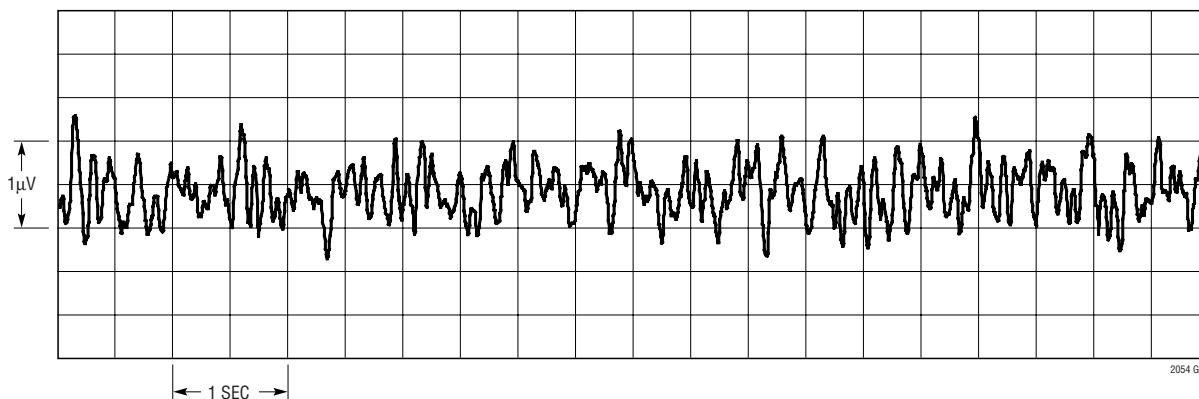

2054 G17

20545fa

## APPLICATIONS INFORMATION


cause the second form of clock feedthrough described above, when averaged, dominate the DC input bias current of the op amp below 70°C.

At temperatures above 70°C, the leakage of the ESD protection diodes on the inputs increases the input bias currents of both inputs in the positive direction, while the current caused by the charge injection stays relatively constant. At elevated temperatures (above 70°C) the leakage current begins to dominate and both the negative and positive pins' input bias currents are in the positive direction (into the pins).


### Extended Common Mode Range

The LTC2054/LTC2055 input stage is designed to allow nearly rail-to-rail input common mode signals. In addition, signals that extend beyond the allowed input common mode range do not cause output phase inversion.

**Voltage Follower with Input Exceeding the Common Mode Range**

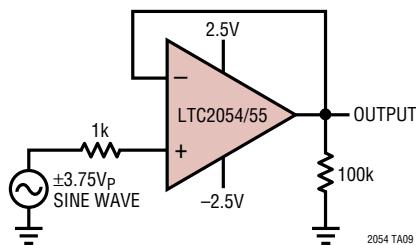


**LTC2054/LTC2055 Extended Common Mode Range**

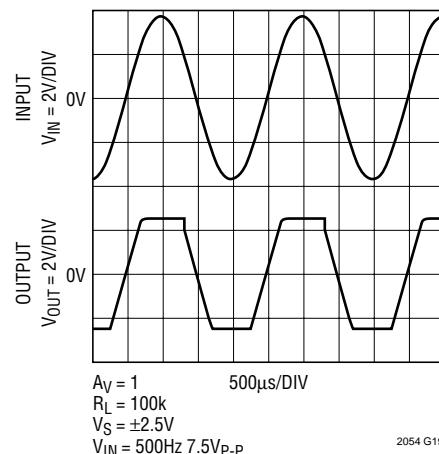

## TYPICAL APPLICATIONS

**Simple Differential Bridge Amplifier**

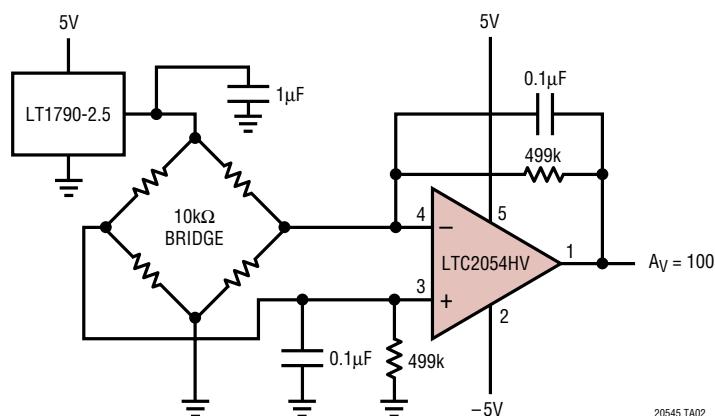


20545fa


# LTC2054/LTC2055

## TYPICAL APPLICATIONS


### Ground Referred Precision Current Sources

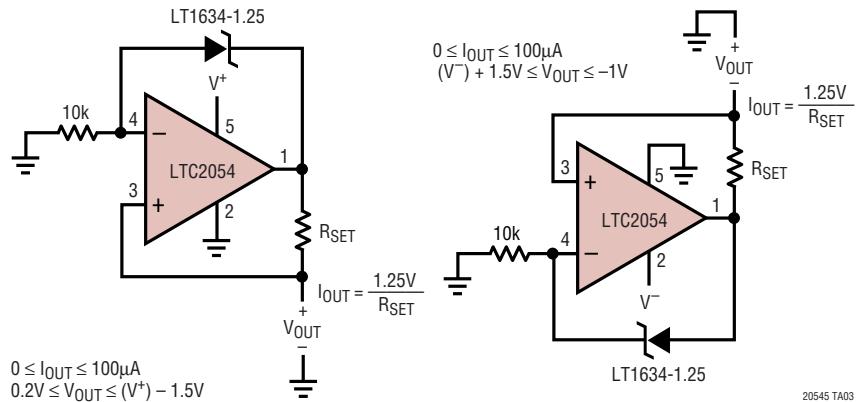


### Instrumentation Amplifier with 100V Common Mode Input Voltage

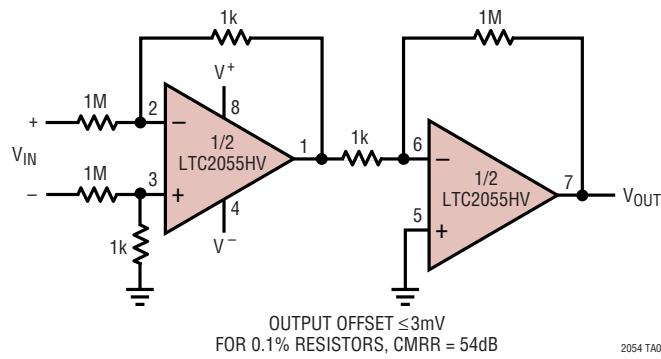

### Gain of 1001 Single Supply Instrumentation Amplifier

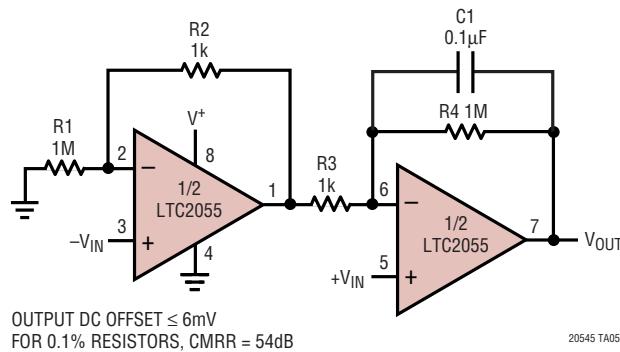


## PACKAGE DESCRIPTION

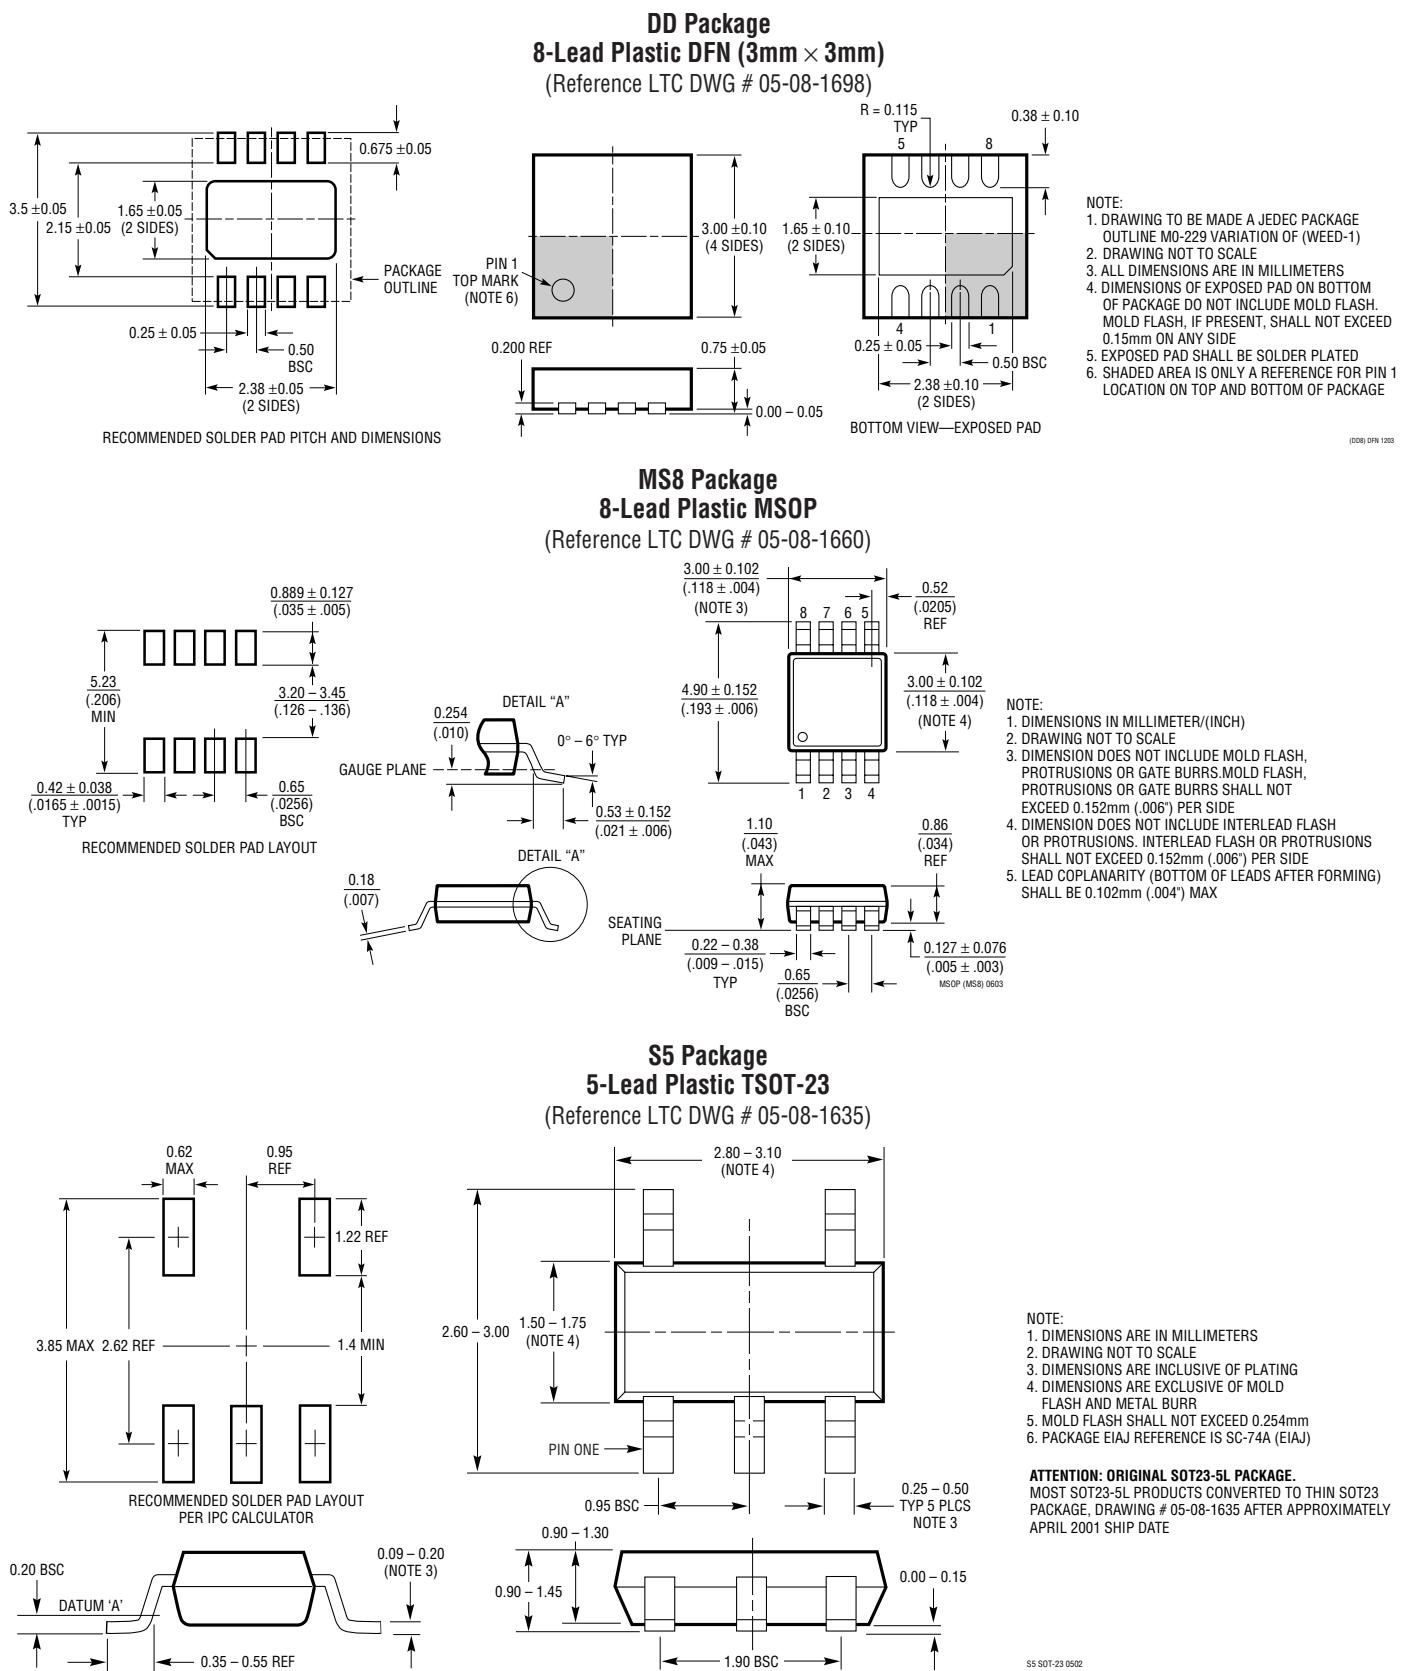


# LTC2054/LTC2055

## TYPICAL APPLICATIONS


### Low Power, Bidirectional 60V Precision Hi Side Current Sense

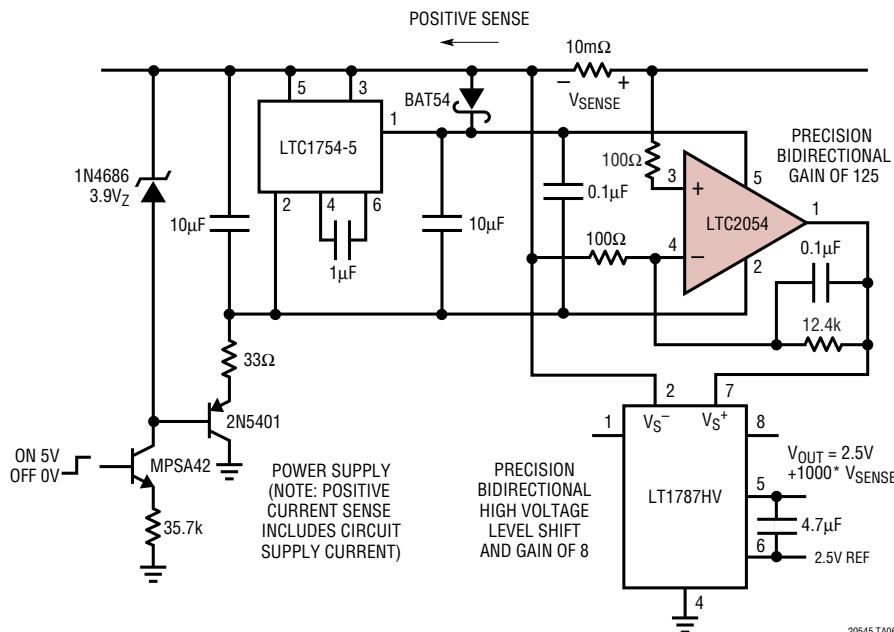

### Precision Low Drift Integrator

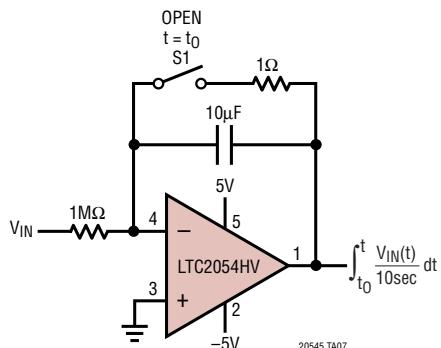

### Ultra-Precision, Wide Dynamic Range 10Hz Bandwidth Photodiode Amplifier

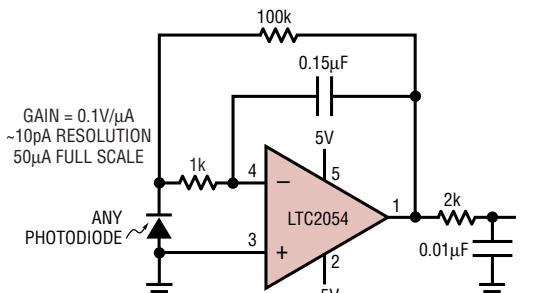

## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1049	Low Power Zero-Drift Op Amp	Low Supply Current 200µA
LTC1050	Precision Zero-Drift Op Amp	Single Supply Operation 4.75V to 16V, Noise Tested and Guaranteed
LTC1051/LTC1053	Precision Zero-Drift Op Amp	Dual/Quad Version of the LTC1050
LTC1150	±15V Zero-Drift Op Amp	High Voltage Operation ±18V
LTC1152	Rail-to-Rail Input and Output Zero-Drift Op Amp	Single Zero-Drift Op Amp with Rail-to-Rail Input and Output and Shutdown
LT1677	Low Noise Rail-to-Rail Input and Output Precision Op Amp	V <sub>OS</sub> = 90µV, V <sub>S</sub> = 2.7V to 44V
LT1884/LT1885	Rail-to-Rail Output Precision Op Amp	V <sub>OS</sub> = 50µV, I <sub>B</sub> = 400pA, V <sub>S</sub> = 2.7V to 40V
LTC2050	Zero-Drift Op Amp	Enhanced Output Drive Capability
LTC2051/LTC2052	Dual/Quad Zero-Drift Op Amp	Dual/Quad Version of the LTC2050 in MS8/GN16 Package
LTC2053	Zero-Drift Instrumentation Amp	Rail-to-Rail Input

20545fa