



# SAW Components

Data Sheet B7852





**SAW Components**

**B7852**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

**Data Sheet**




Chip sized SAW package QCS5E

**Features**

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Very low insertion attenuation
- Low amplitude ripple
- Usable passband 75 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 150 Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mount Technology (SMT)**
- Pb-free

**Terminals**


- Ni, gold-plated

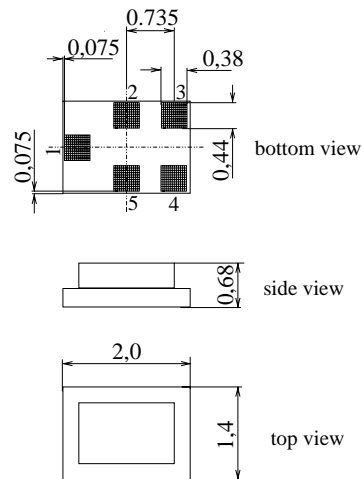

Dimensions in mm, approx. weight 0,007 g

**Pin configuration**

- |     |                   |
|-----|-------------------|
| 1   | Input, unbalanced |
| 3,4 | Output, balanced  |
| 2,5 | Case ground       |

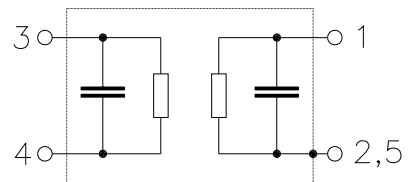

Type	Ordering code	Marking and Package according to	Packing according to
B7852	B39182-B7852-K410	C61157-A7-A131	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 40 / + 85	°C	
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{ESD}$	50*	V	Machine Model, 10 pulses
Input Power at				
GSM850, GSM900	$P_{IN}$	15	dBm	peak power of GSM signal,
GSM1800, GSM1900	$P_{IN}$	12	dBm	duty cycle 4:8
Tx bands				

\* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



**SAW Components**

**B7852**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

**Data Sheet**



**Characteristics**

Operating temperature range:  $T = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 150 \Omega \parallel 15 \text{ nH (balanced)}$

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	1,5	2,1	dB
1805,0 ... 1880,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,5	1,0	dB
1805,0 ... 1880,0 MHz					
<b>Input VSWR</b>		—	1,9	2,2	
1805,0 ... 1880,0 MHz					
<b>Output VSWR</b>		—	1,9	2,2	
1805,0 ... 1880,0 MHz					
<b>Output amplitude balance (<math> S_{31} / S_{21} </math>)</b>		-1,0	-0,4 / +0,6	1,0	dB
1805,0 ... 1880,0 MHz					
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^{\circ}</math>)</b>		-10	-3 / +2	10	°
1805,0 ... 1880,0 MHz					
<b>Attenuation</b>	$\alpha$				
0,0 ... 902,0 MHz		30	53	—	dB
902,0 ... 940,0 MHz		45	52	—	dB
940,0 ... 1705,0 MHz		28	42	—	dB
1705,0 ... 1785,0 MHz		13	18	—	dB
1920,0 ... 1980,0 MHz		17	23	—	dB
1980,0 ... 2030,0 MHz		24	29	—	dB
2030,0 ... 2400,0 MHz		28	34	—	dB
2400,0 ... 2500,0 MHz		32	42	—	dB
2500,0 ... 2775,0 MHz		28	33	—	dB
2775,0 ... 2880,0 MHz		40	54	—	dB
2880,0 ... 3610,0 MHz		28	50	—	dB
3610,0 ... 3760,0 MHz		40	50	—	dB
3760,0 ... 5415,0 MHz		28	42	—	dB
5415,0 ... 5640,0 MHz		35	42	—	dB
5640,0 ... 6000,0 MHz		28	42	—	dB



**SAW Components**

**B7852**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

**Data Sheet**





**Characteristics**

Operating temperature range:  $T = -20$  to  $+75$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 150 \Omega \parallel 15$  nH (balanced)

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	1,7	2,3	dB
1805,0 ... 1880,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,7	1,3	dB
1805,0 ... 1880,0 MHz					
<b>Input VSWR</b>		—	1,9	2,3	
1805,0 ... 1880,0 MHz					
<b>Output VSWR</b>		—	1,9	2,3	
1805,0 ... 1880,0 MHz					
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		-1,0	-0,5 / +0,6	1,0	dB
1805,0 ... 1880,0 MHz					
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^\circ</math>)</b>		-10	-3 / +2	10	°
1805,0 ... 1880,0 MHz					
<b>Attenuation</b>	$\alpha$				
0,0 ... 902,0 MHz		30	53	—	dB
902,0 ... 940,0 MHz		45	52	—	dB
940,0 ... 1705,0 MHz		28	42	—	dB
1705,0 ... 1785,0 MHz		13	18	—	dB
1920,0 ... 1980,0 MHz		17	23	—	dB
1980,0 ... 2030,0 MHz		24	29	—	dB
2030,0 ... 2400,0 MHz		28	34	—	dB
2400,0 ... 2500,0 MHz		32	42	—	dB
2500,0 ... 2775,0 MHz		28	33	—	dB
2775,0 ... 2880,0 MHz		40	54	—	dB
2880,0 ... 3610,0 MHz		28	50	—	dB
3610,0 ... 3760,0 MHz		40	50	—	dB
3760,0 ... 5415,0 MHz		28	42	—	dB
5415,0 ... 5640,0 MHz		35	42	—	dB
5640,0 ... 6000,0 MHz		28	42	—	dB



Transfer function

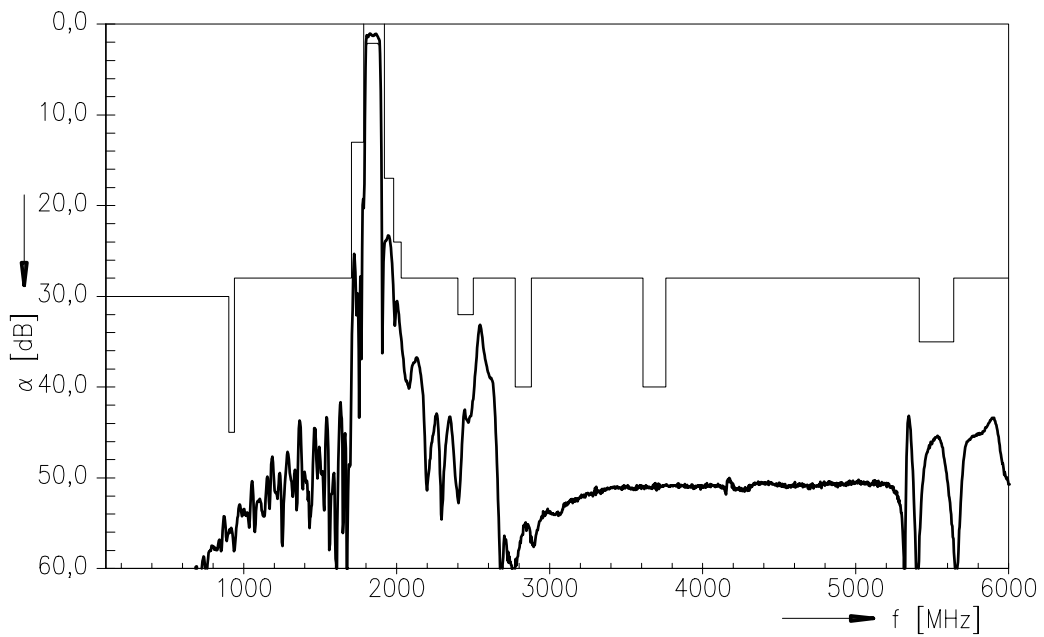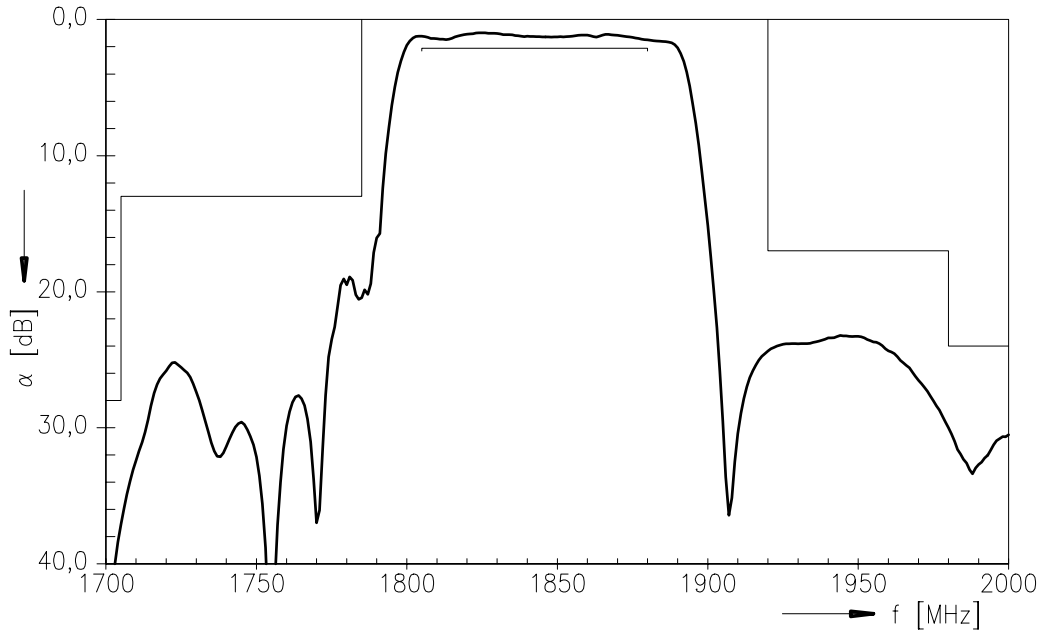



**SAW Components**

**B7852**

**Low-Loss Filter for Mobile Communication**

**1842,5 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC WT**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.