

## Features

- Single Outputs up to 20A
- Input/Output 1.6kVDC Isolation
- Adjustable Output Voltage
- No Minimum Load
- Under -Voltage Lockout
- Industry Standard Footprint
- Fixed Operating Frequency
- Halt Tested
- Compact 36.83 x 57.91 x 12.7mm Package
- High Efficiency to 91%

**INNOLINE**  
DC/DC-Converter

# RP50-SB Series

## 50 Watt Single Output

### Selection Guide

Part Number	Input Voltage	Output Voltage	Output Current	Load Regulation	Efficiency <sup>(5)</sup>
Single Output	(VDC)	(VDC)	(A)	(mV)	%
RP50-481.8SB	36 – 75	1.8	20	5.4	87
RP50-482.5SB	36 – 75	2.5	20	7.5	89
RP50-483.3SB	36 – 75	3.3	15	10	90
RP50-4805SB	36 – 75	5.0	10	15	91

\* add suffix "P" for positive logic ON/OFF control.



### Description

The RP50-SB Series has been specifically designed for low voltage silicon applications. A wide input voltage range, output voltage trim and sense inputs are all standard features. The converters also benefit from comprehensive over-current, over-voltage and over-temperature protection. The RP50-SB is ideally suited to telecom, network and industrial applications.



### Notes:

1. Maximum output deviation is 10% inclusive of remote sense. If remote sense is not being used, the +Vsense should be connected to its corresponding +Vout
2. Standard is negative remote ON/OFF, add suffix "P" for positive remote ON/OFF.
3. Heat sink is optional and P/N: 7G-0021, 7G-0022, 7G-0023, 7G-0024.
4. The RP50-SB meets level A and level B conducted emissions only with external components connected before the input pin to the converter.
5. Typical value at nominal input voltage and full load.
6. BASEPLATE GROUNDING : Base-plate should be grounded at one of the four screw bolts prior to operation.

**Specifications (refer to the standard application circuit, Ta: 25°C)**

Input Voltage Range	36-75VDC	(48V nom.)
Under-Voltage Lockout	Power Up Power Down	34V typ. 32V typ.
Input Filter		L-C type
Input Surge Voltage 100ms max		100VDC
Start up time	Nominal Vin and constant resistive load	25ms typ.
Remote ON/OFF (Note 2) (Positive logic)	ON=Open or 3.0V < Vr < 15V, OFF=Short or 0V < Vr < 1.2V,	I <sub>IN</sub> =1mA max.
(Negative logic)	ON=Short or 0V < Vr < 1.2V, OFF=Open or 3.0V < Vr < 15V,	I <sub>IN</sub> =1mA max.
Continuous Output Power		50W max.
Output Voltage Accuracy	full load and nominal Vin	±1.5%
Output Voltage Adjustment (Note 1)		+10%, -20%
Minimum Load		0%
Line Regulation	low line to high line at full load	±0.2%
Load Regulation	0% to 100%full load	See table
Remote Sense (Note 1)		10% of Vout
Ripple and Noise 20MHz bandwidth	With 10µF tantalum and 1µF ceramic across output	100mVp-p
Temperature Coefficient		±0.02%/°C
Transient Response Recovery Time	25% load step change	200µs
Over Voltage Protection threshold (Hiccup)		120% of Vout
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short Circuit Protection		Hiccup, Automatic recovery
Efficiency (at nominal input voltage, full load)		up to 91%.
Isolation Voltage	Input to Output Input to Case Output to Case	1600VDC min. 1000VDC min. 1000VDC min.
Isolation Resistance		10 <sup>7</sup> Ω min.
Isolation Capacitance		2500pF max.
Operating Frequency		270KHz typ.
Operating Temperature Range (Note 3)		-40°C to +100°C (base plate)
Over Temperature Protection		110°C
Storage Temperature Range		-55°C to +125°C
Humidity max., Non-condensing		95%
Thermal Shock		MIL-STD-810D
Vibration	10 ~ 55Hz 2G, 3minutes period, 30minutes analog	X, Y and Z
Humidity	Non Condensing	95% max.
Conducted Emissions	EN55022 (Note 4) EN55022 (Note 4)	Level A Level B
Radiated Emissions	EN55022 (Note 4)	Level A


Continued on next page

**Specifications (refer to the standard application circuit, Ta: 25°C)**


ESD	EN61000-4-2	Perf. Criteria2
Radiated Immunity	EN61000-4-3	Perf. Criteria2
Fast Transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted Immunity	EN61000-4-6	Perf. Criteria2
Case Material	Open with Aluminium base plate	
Weight	42g	
MTBF Bellcore TR-NWT-000332, Tc=40°C, Io=80% max.	2500 x 10 <sup>3</sup> hours	

**Characteristics**


**Efficiency Input Voltage  
RP50-4805SB**

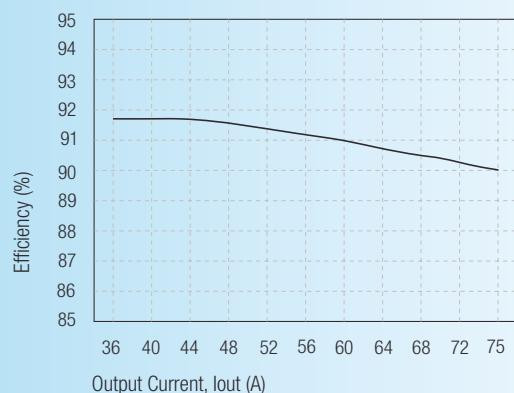


**Efficiency Output Current Iout  
RP50-4805SB**

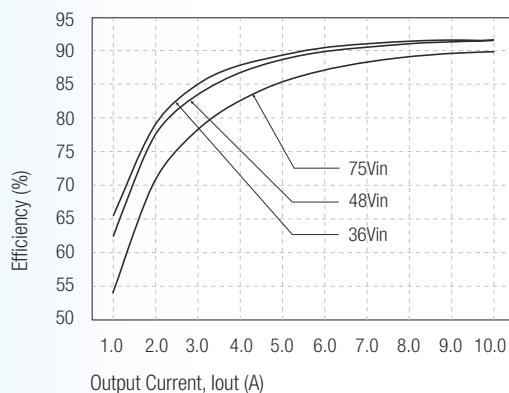


**Input Without Heatsink  
RP50-4805SB**

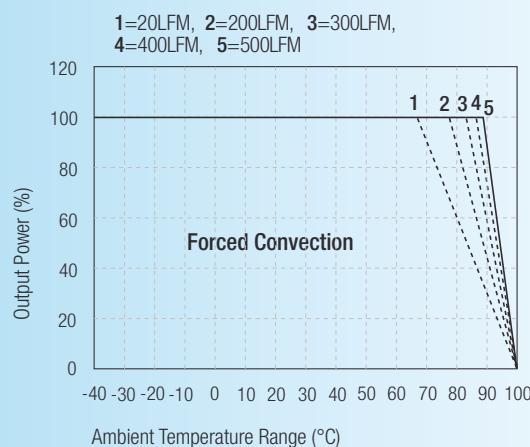


**Input With Heatsink (7G-0022)  
RP50-4805SB**

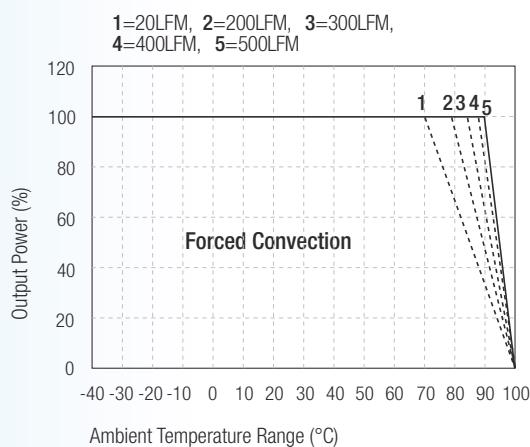

**Package Style and Pinning (mm)**

3rd angle projection 

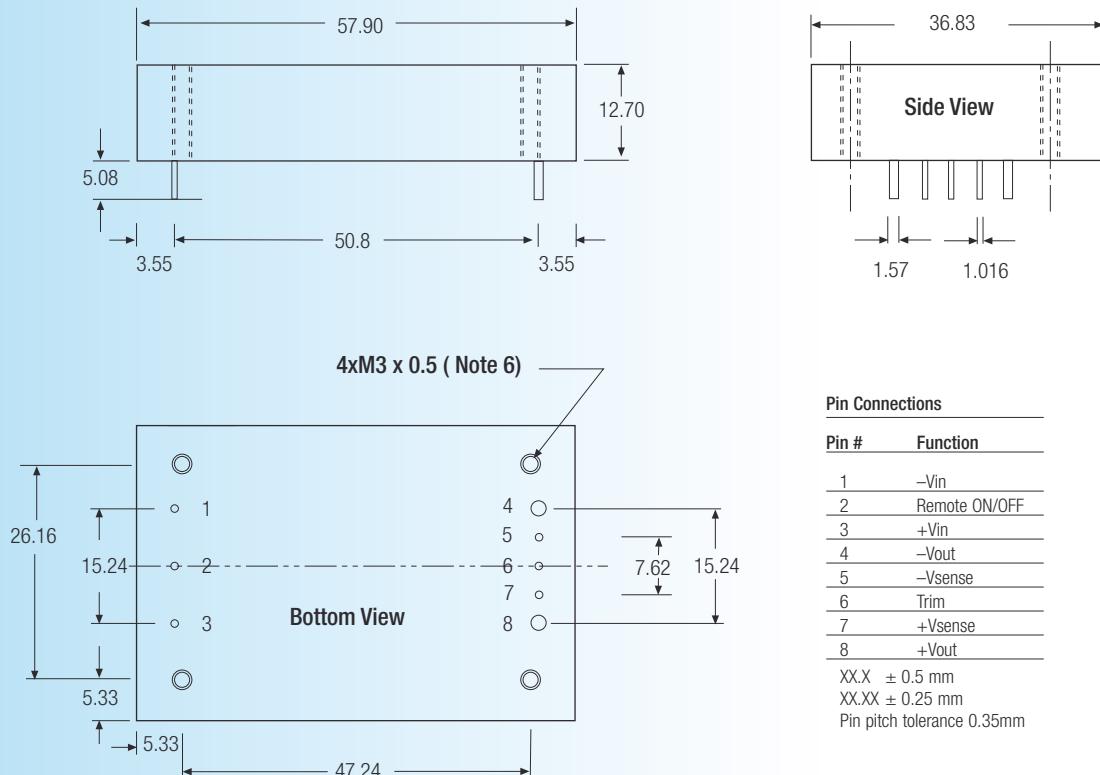

## External Output Trimming

Output can be externally trimmed by using the method shown below.

Trim Resistor Calculation:

$$R_{UP} (\text{k}\Omega) = \frac{5.1V_{out} (100+\Delta\%)}{1.225\Delta\%} - \frac{510}{\Delta\%} - 10.2$$

$$R_{DN} (\text{k}\Omega) = \frac{510}{\Delta\%} - 10.2$$

