

Digitally Programmable 2,4 and 8 multiplex LCD Driver

Description

The V6123 is low multiplex LCD driver. The 2, 4 and 8 way multiplex is digitally programmable by the command byte. The display refresh is handled on chip by an internal RC oscillator via 1 selectable 8 x 60 RAM which holds the LCD content driven by the driver. LCD pixels (or segments) are addressed on a one to one basis with the 8 x 60 bit RAM (a set bit corresponds to an activated LCD pixel).

The V6123 has very low dynamic current consumption, typically 175 µA at VDD = 5V, VLCD = 7V making it particularly attractive for portable and battery powered products. The wide operating range on supply voltages and temperature offers much application flexibility. The LCD bias generation and frame frequency are generated on chip. The clock signal can be used to shift and to latch the datas into the RAM.

Applications

- Automotive displays
- Telephones
- Pagers
- Portable, battery operated products
- Large displays (public information panels etc.)
- Balances and scales
- Utility meters

Features

- Very simple 1-bit interface (see Fig.1)
- V6123 mux mode 2 with 2 rows and 58 columns
- V6123 mux mode 4 with 4 rows and 56 columns
- V6123 mux mode 8 with 8 rows and 52 columns
- Very simple 1-bit interface, reduced to its simplest form
- Frame frequency on chip by internal RC oscillator
- Voltage bias and mux signal generation on chip
- 1 display RAM addressable as 8 X 60 bit words
- Column driver only mode to have 60 column outputs
- No busy states
- No external components needed
- Blank function for LCD blanking
- Bit mapped
- Wide VDD voltage supply range, 2 to 6V
- Wide VLCD voltage supply range, 2 to 8.5V
- 40°C to +85°C temperature range

Typical Operating Conditions

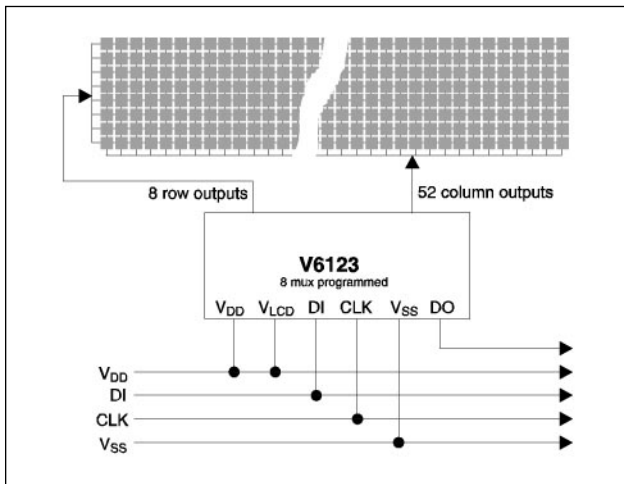


Fig. 1

Pad Assignment


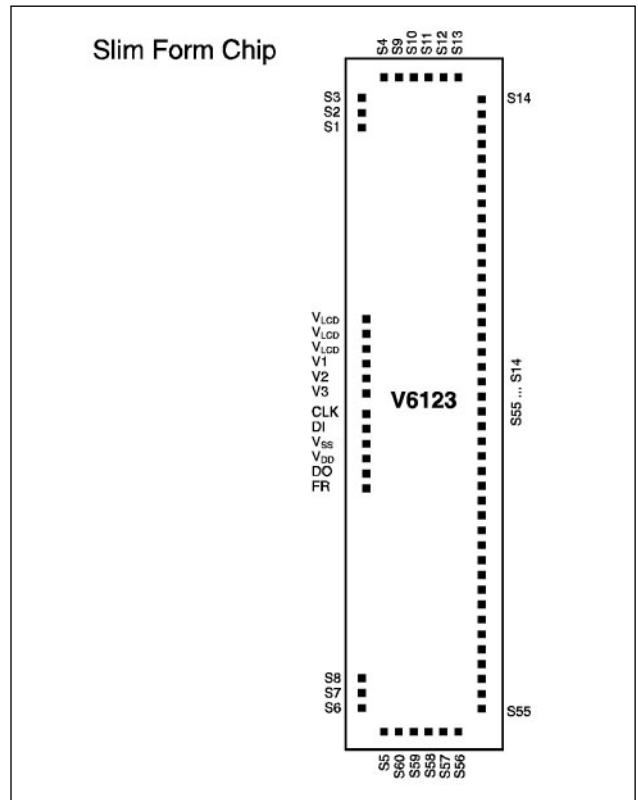


Fig. 2



Absolute Maximum Ratings

Parameter	Symbol	Conditions
Supply voltage range	V_{DD}	-0.3V to 9V
LCD supply voltage range	V_{LCD}	-0.3V to 10V
Voltage at DI, DO, CLK, FR	V_{LOGIC}	-0.3V to $V_{DD} + 0.3V$
Voltage at V1 to V3, S1 to S60	V_{DISP}	-0.3V to $V_{LC} + 0.3V$
Storage temperature range	T_{STO}	-65 to +150°C
PElectrostatic discharge max. to MIL-STD-883C method 3015.7 with ref. to V_{SS}	V_{Smax}	1000V
Maximum soldering conditions	T_{Smax}	250°C x 10s

Table 1

Handling Procedures

This device has built-in protection against high static voltages or electric fields; however, anti-static precautions must be taken as for any other CMOS component. Unless otherwise specified, proper operation can only occur when all terminal voltages are kept within the voltage range. Unused inputs must always be tied to a defined logic voltage level.

Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_A	-40		+85	°C
Logic supply voltage	V_{DD}	2	5	6	V
LCD supply voltage	V_{LCD}	2	5	8.5	V

Table 2

Stresses above these listed maximum ratings may cause permanent damages to the device. Exposure beyond specified operating conditions may affect device reliability or cause malfunction.

Electrical Characteristics

$V_{DD} = 5V \pm 10\%$, $V_{LCD} = 2$ to 8.5V and $T_A = -40$ to +85°C, unless otherwise specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Dynamic supply current	I_{LCD}	See note 1		175	250	μA
Dynamic supply current	I_{DD}	See note 1 at $T_A = 25^\circ C$		29	35	μA
Dynamic supply current	I_{DD}	See note 1		29	50	μA
Dynamic supply current	I_{DD}	See note 2		285	350	μA
Control Signals DI, CLK, FR						
Input leakage	I_{IN}	$0 < V_{IN} < V_{DD}$		1	100	nA
Input capacitance	C_{IN}	at $T_A = 25^\circ C$		8		pF
Low level input voltage	V_{IL}		0		0.8	V
High level input voltage	V_{IH}		2.0		V_{DD}	V
Data Output DO						
High level output voltage	V_{OH}	$I_H = 2mA$	2.4			V
Low level output voltage	V_{OL}	$I_L = 2mA$			0.4	V
Driver Outputs S1 ... S60						
Driver impedance (note 4)	R_{OUT}	$I_{OUT} = 10\mu A, V_{LCD} = 7V$		1	1.5	kΩ
Driver impedance (note 4)	R_{OUT}	$I_{OUT} = 10\mu A, V_{LCD} = 3V$		2.6	3.5	kΩ
Driver impedance (note 4)	R_{OUT}	$I_{OUT} = 10\mu A, V_{LCD} = 2V$		7		kΩ
Bias impedance V1, V2, V3 (note 5)	R_{BIAS}	$I_{OUT} = 10\mu A, V_{LCD} = 7V$		18	24	kΩ
Bias impedance V1, V2, V3 (note 5)	R_{BIAS}	$I_{OUT} = 10\mu A, V_{LCD} = 3V$		20	27	kΩ
Bias impedance V1, V2, V3 (note 5)	R_{BIAS}	$I_{OUT} = 10\mu A, V_{LCD} = 2V$		24		kΩ
DC output component	$\pm VDC$	see Table 4a and 4b, $V_{LCD} = 5V$		15	50	mV

Table 3


Note 1: All outputs open, DI and CLK at V_{SS} , FR = 400Hz, all other inputs at V_{DD}

Note 2: All outputs open, DI at V_{SS} , FR = 400Hz, $f_{CLK} = 1MHz$

Note 3: All outputs open, all inputs at V_{DD}

Note 4: This is the impedance between of the voltage bias level pins (V1, V2, or V3) and the output pins S1 to S60 when a given voltage bias level is driving the outputs (S1 to S60)

Note 5: This is the impedance seen at the segment pin. Outputs measured one at a time



V6123

Column Drivers

Outputs	FR Polarity	Column Data	Measured	Guaranteed
S1 to S60	logic 1	logic 1	$ Sx^* - V_{SS} $	$ V_{LCD} - Sx^* = Sx^* - V_{SS} \pm 25mV$
S1 to S60	logic 0	logic 1	$ V_{LCD} - Sx^* $	
S1 to S60	logic 1	logic 0	$ V_{LCD} - Sx^* $	$ V_{LCD} - Sx^* = Sx^* - V_{SS} \pm 25mV$
S1 to S60	logic 0	logic 0	$ Sx^* - V_{SS} $	

Table 4a

*Sx = the output number (ie. S1 to S60)

Row Drivers

Outputs	FR Polarity	Row Data	Measured	Guaranteed
S1 to Sn*	logic 1	logic 1	$ V_{LCD} - Sx $	$ V_{LCD} - Sx = Sx - V_{SS} \pm 25mV$
S1 to Sn*	logic 0	logic 1	$ Sx - V_{SS} $	
S1 to Sn*	logic 1	logic 0	$ Sx - V_{SS} $	$ V_{LCD} - Sx = Sx - V_{SS} \pm 25mV$
S1 to Sn*	logic 0	logic 0	$ V_{LCD} - Sx $	

Table 4b

*n = the V6123 mux programme number (ie. 2, 4 or 8)

Timing Characteristics

$V_{DD} = 5V \pm 10\%$, $V_{LCD} = 2$ to $8.5V$ and $T_A = -40^\circ C$ to $+85^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Clock high pulse width	t_{CH}		120			ns
Clock low pulse width	t_{CL}		120		2000	ns
Clock and FR rise time	t_{CR}				200	ns
Clock and FR fall time	t_{CF}				200	ns
Data input setup time	t_{DS}		20 (note 1)			ns
Data input hold time	t_{DH}		30 (note 1)			ns
Data output propagation	t_{PD}	$C_{LOAD} = 50pF$			200	ns
STR pulse width	t_{STR}		6		∞	μs
FR (internal frame frequency)	f_{FR} (note 2)	$T_A = 25^\circ C$	45	55	65	Hz

Table 5a

Note 1: $t_{DS} + t_{DH}$ minimum must be $\geq 100ns$. If $t_{DS} = 20ns$ then $t_{DH} \geq 80ns$

Note 2: V6123 n, FR = n times the desired LCD refresh rate where n is the V6123 mux mode number

See Fig. 14, 15 for more details concerning frame frequency

$V_{DD} = 2$ to $6V$, $V_{LCD} = 2$ to $8.5V$ and $T_A = -40^\circ C$ to $+85^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Clock high pulse width	t_{CH}		0.5			μs
Clock low pulse width	t_{CL}		0.5		1.5	μs
Clock and FR rise time	t_{CR}				200	ns
Clock and FR fall time	t_{CF}				200	ns
Data input setup time	t_{DS}		100 (note 1)			ns
Data input hold time	t_{DH}		150 (note 1)			ns
Data output propagation	t_{PD}	$C_{LOAD} = 50pF$			500	ns
STR pulse width	t_{STR}		16		∞	μs

Table 5b

Note 1: $t_{DS} + t_{DH}$ minimum must be $\geq 500ns$. If $t_{DS} = 100ns$ then $t_{DH} \geq 400ns$

Timing Waveforms

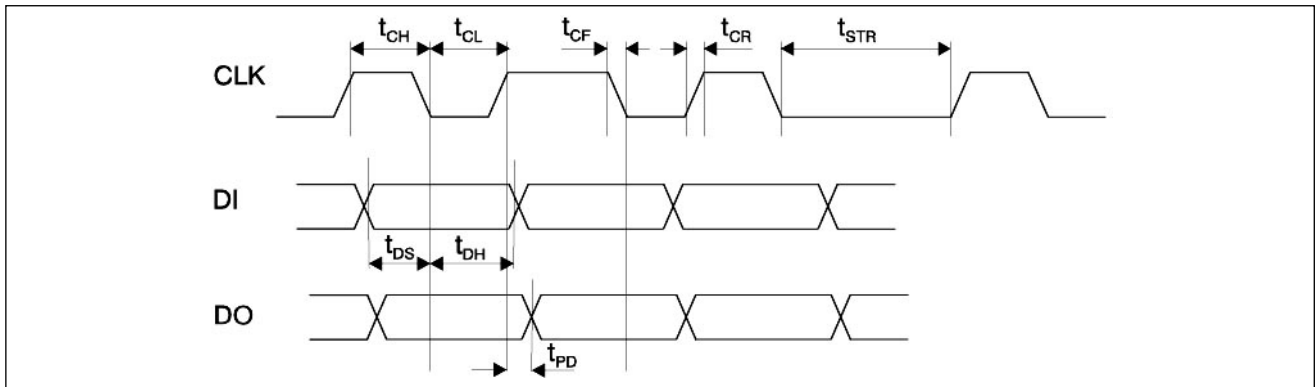


Fig. 3

Clock Definition

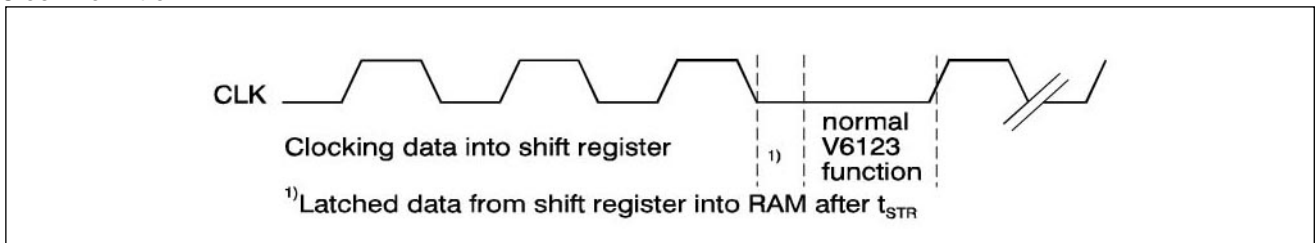


Fig. 4

Programming Data Bits and Data Transfer Cycle

Command Bits 0 to 7							
0	1	2	3	4	5	6	7
Multiplex Ratio		$\overline{\text{COL}}$	RAM Address		Blank	SET	

Bit2: $\overline{\text{COL}}$ bit configure the V6123 function as row and column driver or column driver only.

Bit6: Blank bit forces all column outputs OFF.

Bit7: SET bit forces all column outputs ON.

Note: If bit 6 and 7 are both to 1L the chip is synchronized to row 1.

Mux Ratio (bit 0, 1)		
0	1	Mux Mode
0	0	2
0	1	4
1	0	-
1	1	8

V6123 as a row and column driver, 68 bit load cycle, RAM address arising from command bits 3 to 5

Display RAM Address

Command Bits 3 to 5			LCD Row
Mux prog. 2	Mux prog. 4	Mux prog. 8	
000	000	000	Row 1
001	001	001	Row 2
	010	010	Row 3
	011	011	Row 4
		100	Row 5
		101	Row 6
		110	Row 7
		111	Row 8

All mux mode programming or $\overline{\text{COL}}$ states need 68 bit load cycles

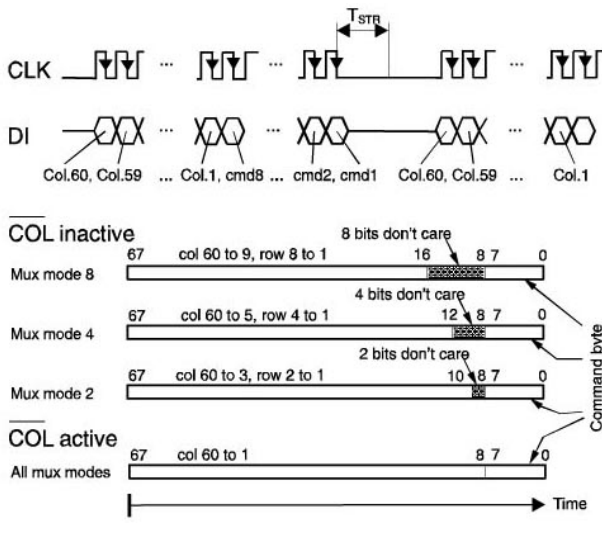


Fig. 5

Block Diagram


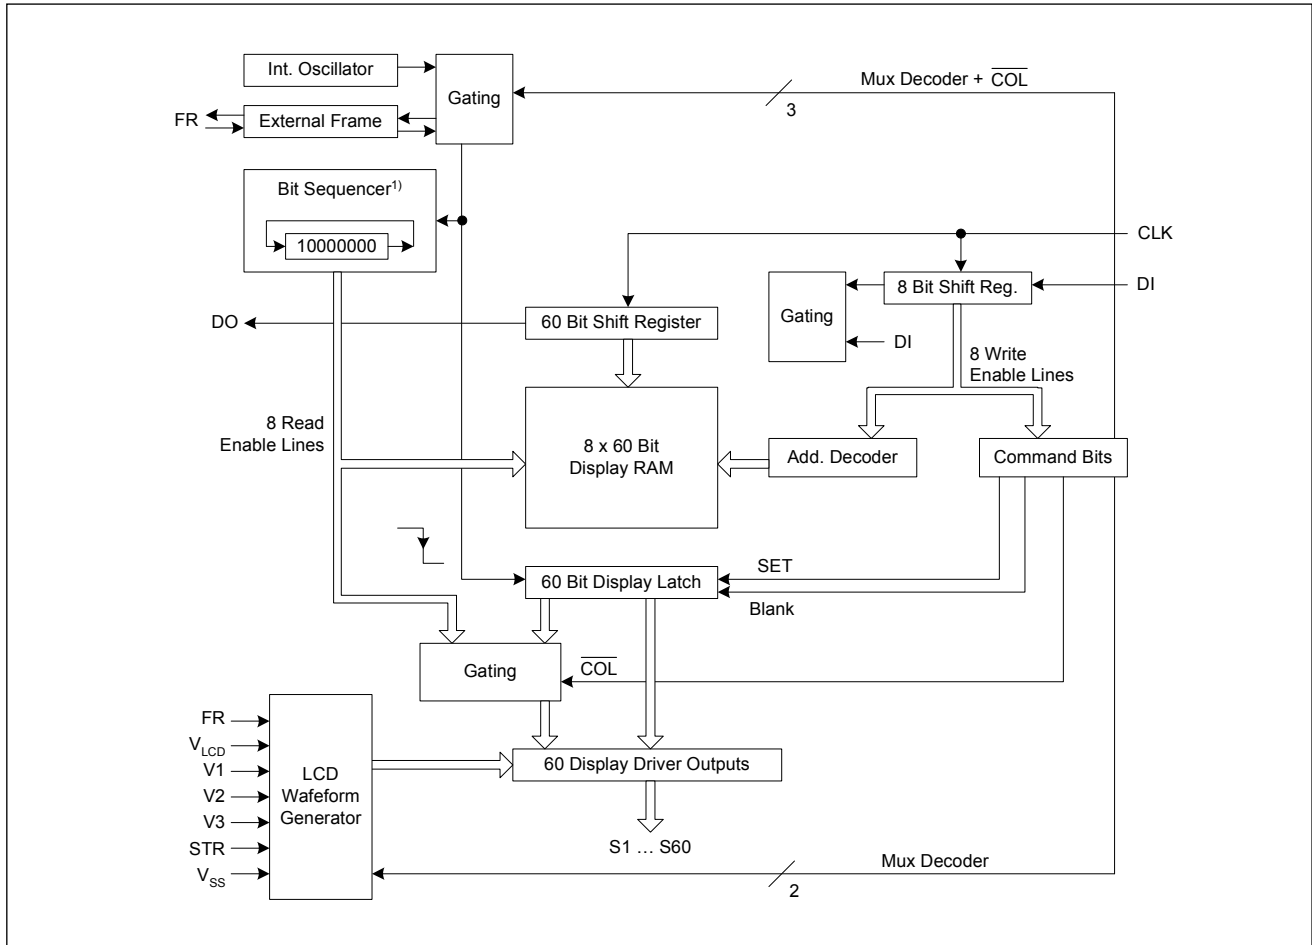


Fig. 6



V6123

Pin Assignment

Name	Function
S1 ...S60	LCD outputs, see Table 7
V3	LCD voltage bias level 3 (note 1, 2)
V2	LCD voltage bias level 2 (note 1)
V1	LCD voltage bias level 1 (note 1)
V _{LCD}	Power supply for the LCD
FR	AC I/O signal for LCD driver output
DI	Serial data input
DO	Serial data output
CLK	Data clock input
V _{DD}	Power supply for logic
V _{SS}	Supply GND

Table 6

Name	COL inactive			COL active
	V6123 (2)	V6123 (4)	V6123 (8)	
S1	Row1	Row1	Row1	Col1
S2	Row2	Row2	Row2	Col2
S3	Col1	Row3	Row3	Col3
S4	Col2	Row4	Row4	Col4
S5	Col3	Col1	Row5	Col5
S6	Col4	Col2	Row6	Col6
S7	Col5	Col3	Row7	Col7
S8	Col6	Col4	Row8	Col8
S9..S60	Col7..58	Col5..56	Col1..52	Col9..60

Table 7

Note 1: The V6123 has internal voltage bias level generation. When driving large pixels, an external resistor divider chain can be connected to the voltage bias level inputs to obtain enhanced display contrast. See Fig 11, 12 and 13. The external resistor divider ratio should be in accordance with the internal resistor ratio (see Table 8).

Note 2: V3 is connected internally to V_{SS} on the V6123 mux mode 4.

LCD Voltage Bias Levels

	LCD Drive Type	LCD Bias Configuration	$\frac{V_{OP}(\text{note1})}{V_{OFF}(\text{rms})}$	$\frac{V_{ON}(\text{rms})}{V_{OFF}(\text{rms})}$
	V6123 (2) n=2 1:2 MUX	5 Levels	$\sqrt{\frac{\sqrt{2n}}{1-\frac{1}{n}}} = 3.69$	$\sqrt{\frac{\sqrt{n+1}}{\sqrt{n}-1}} = 2.41$
	V6123 (4) n=4 1:4 MUX	$\frac{1}{3}$ Bias 4 Levels	3	$\sqrt{1+\frac{8}{n}} = 1.73$
	V6123 (8) n=8 1:8 MUX	$\frac{1}{4}$ Bias 5 Levels	$\frac{4}{\sqrt{1+\frac{3}{n}}} = 3.4$	$\sqrt{\frac{n+15}{n+3}} = 1.446$

Table 8

Note 1: $V_{OP} = V_{LCD} - V_{SS}$

Row and Column Multiplexing Waveform V6123 (2)

$$V_{OP} = V_{LCD} - V_{SS}, V_{STATE} = V_{COL} - V_{ROW}$$

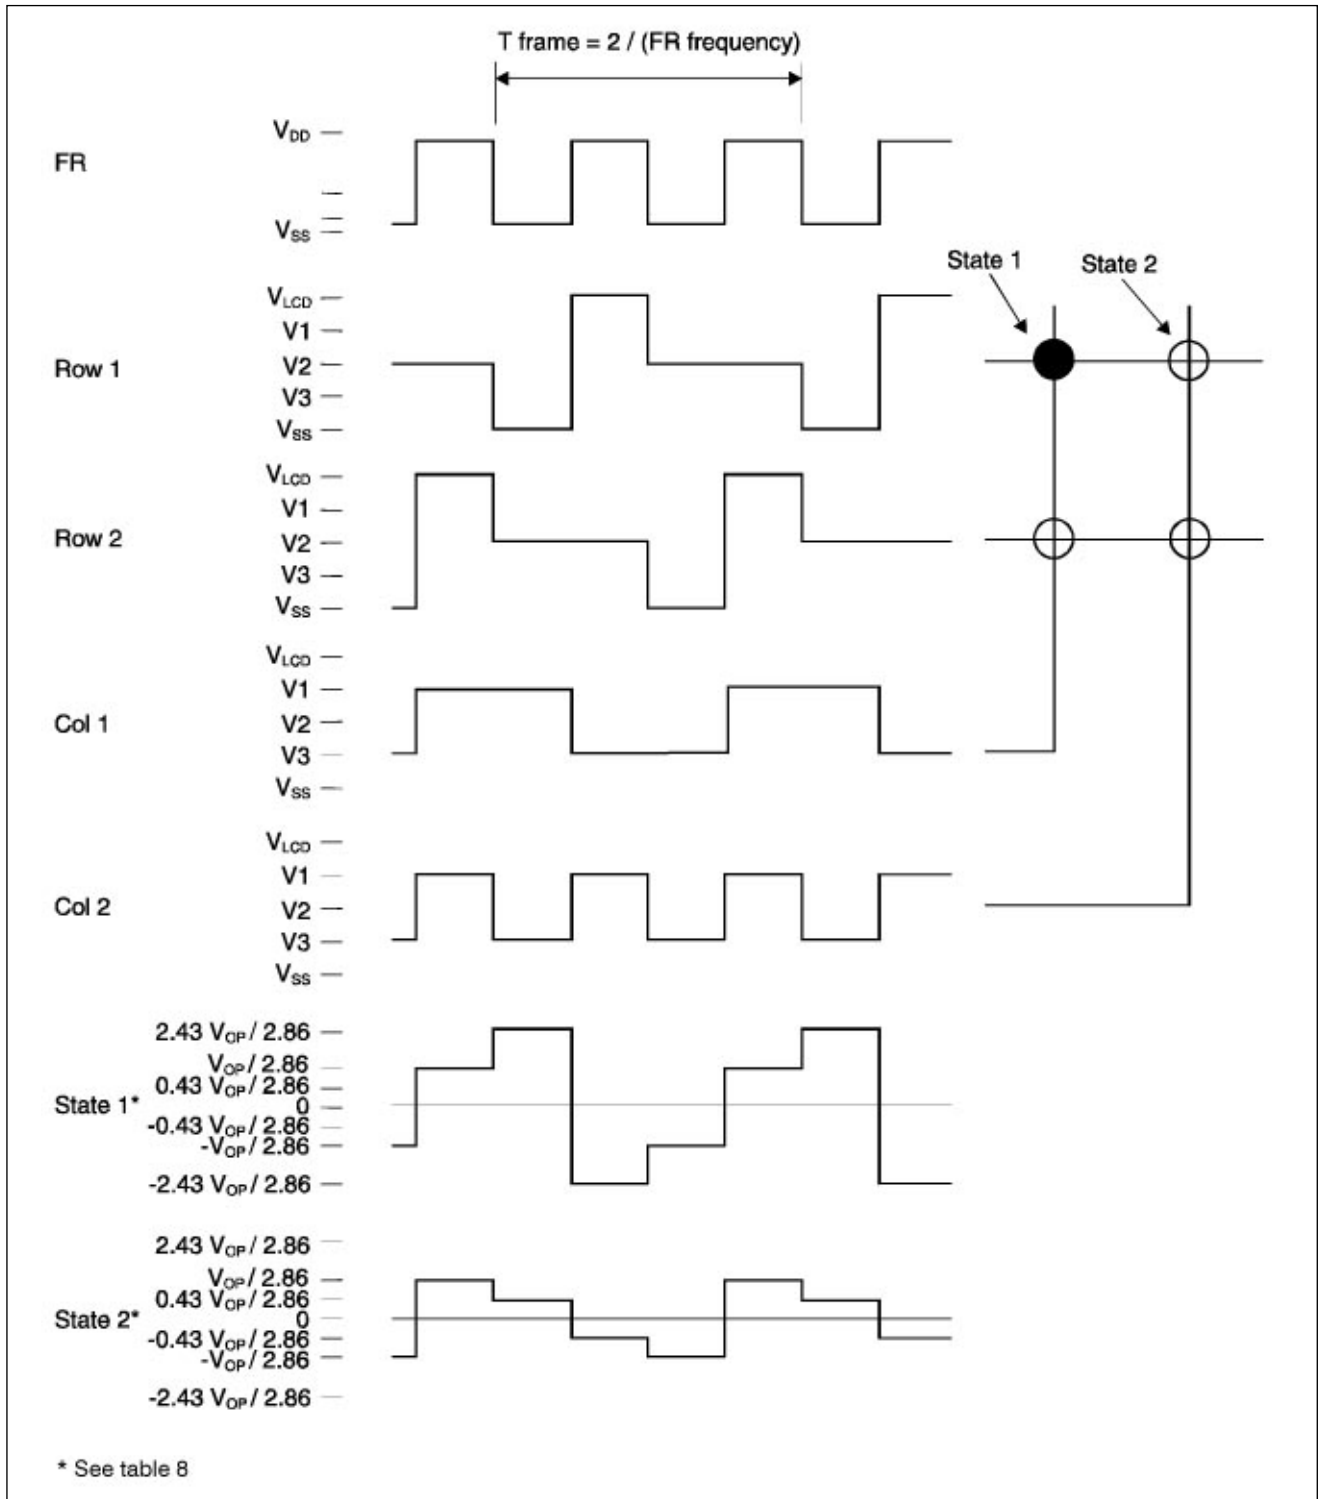


Fig. 7

Row and Column Multiplexing Waveform V6123 (4)

$$V_{OP} = V_{LCD} - V_{SS}, \quad V_{STATE} = V_{COL} - V_{ROW}$$

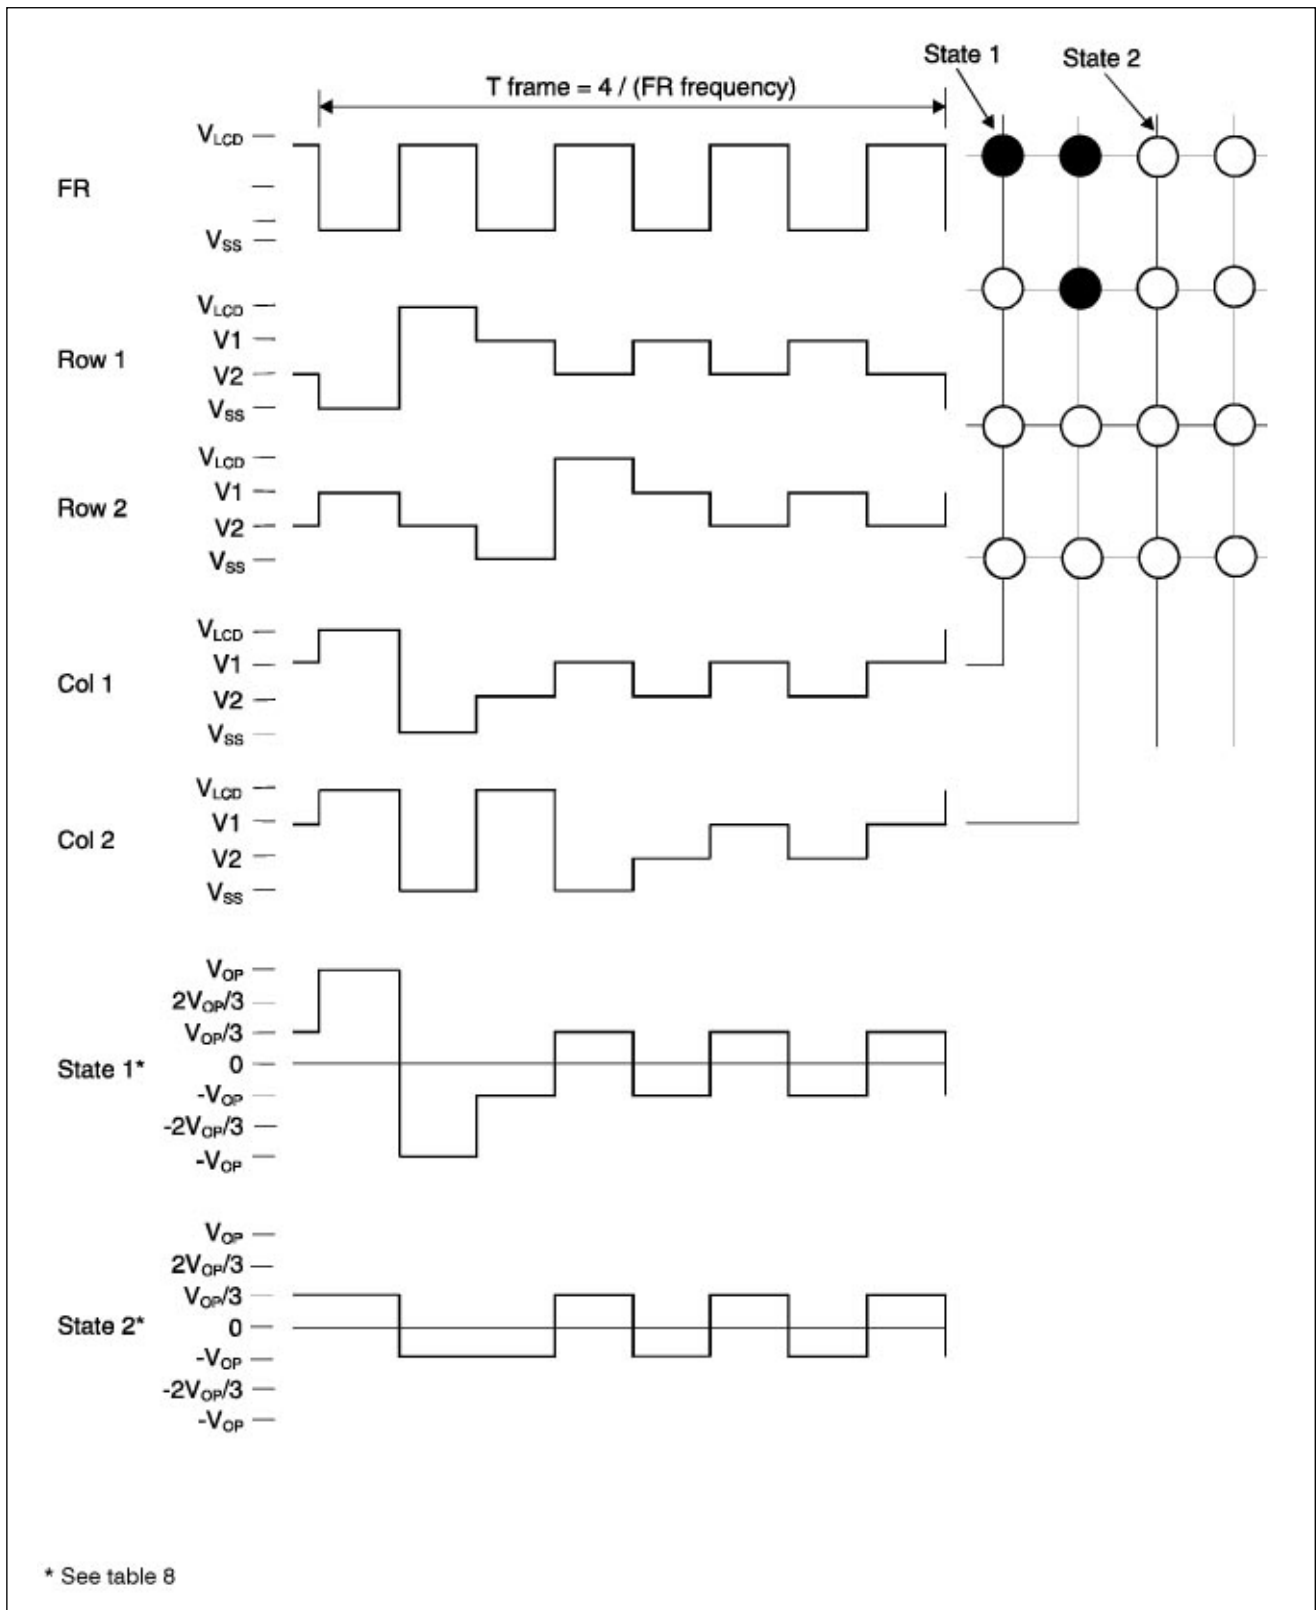


Fig. 8

Row and Column Multiplexing Waveform V6123 (8)

$$V_{OP} = V_{LCD} - V_{SS}, \quad V_{STATE} = V_{COL} - V_{ROW}$$

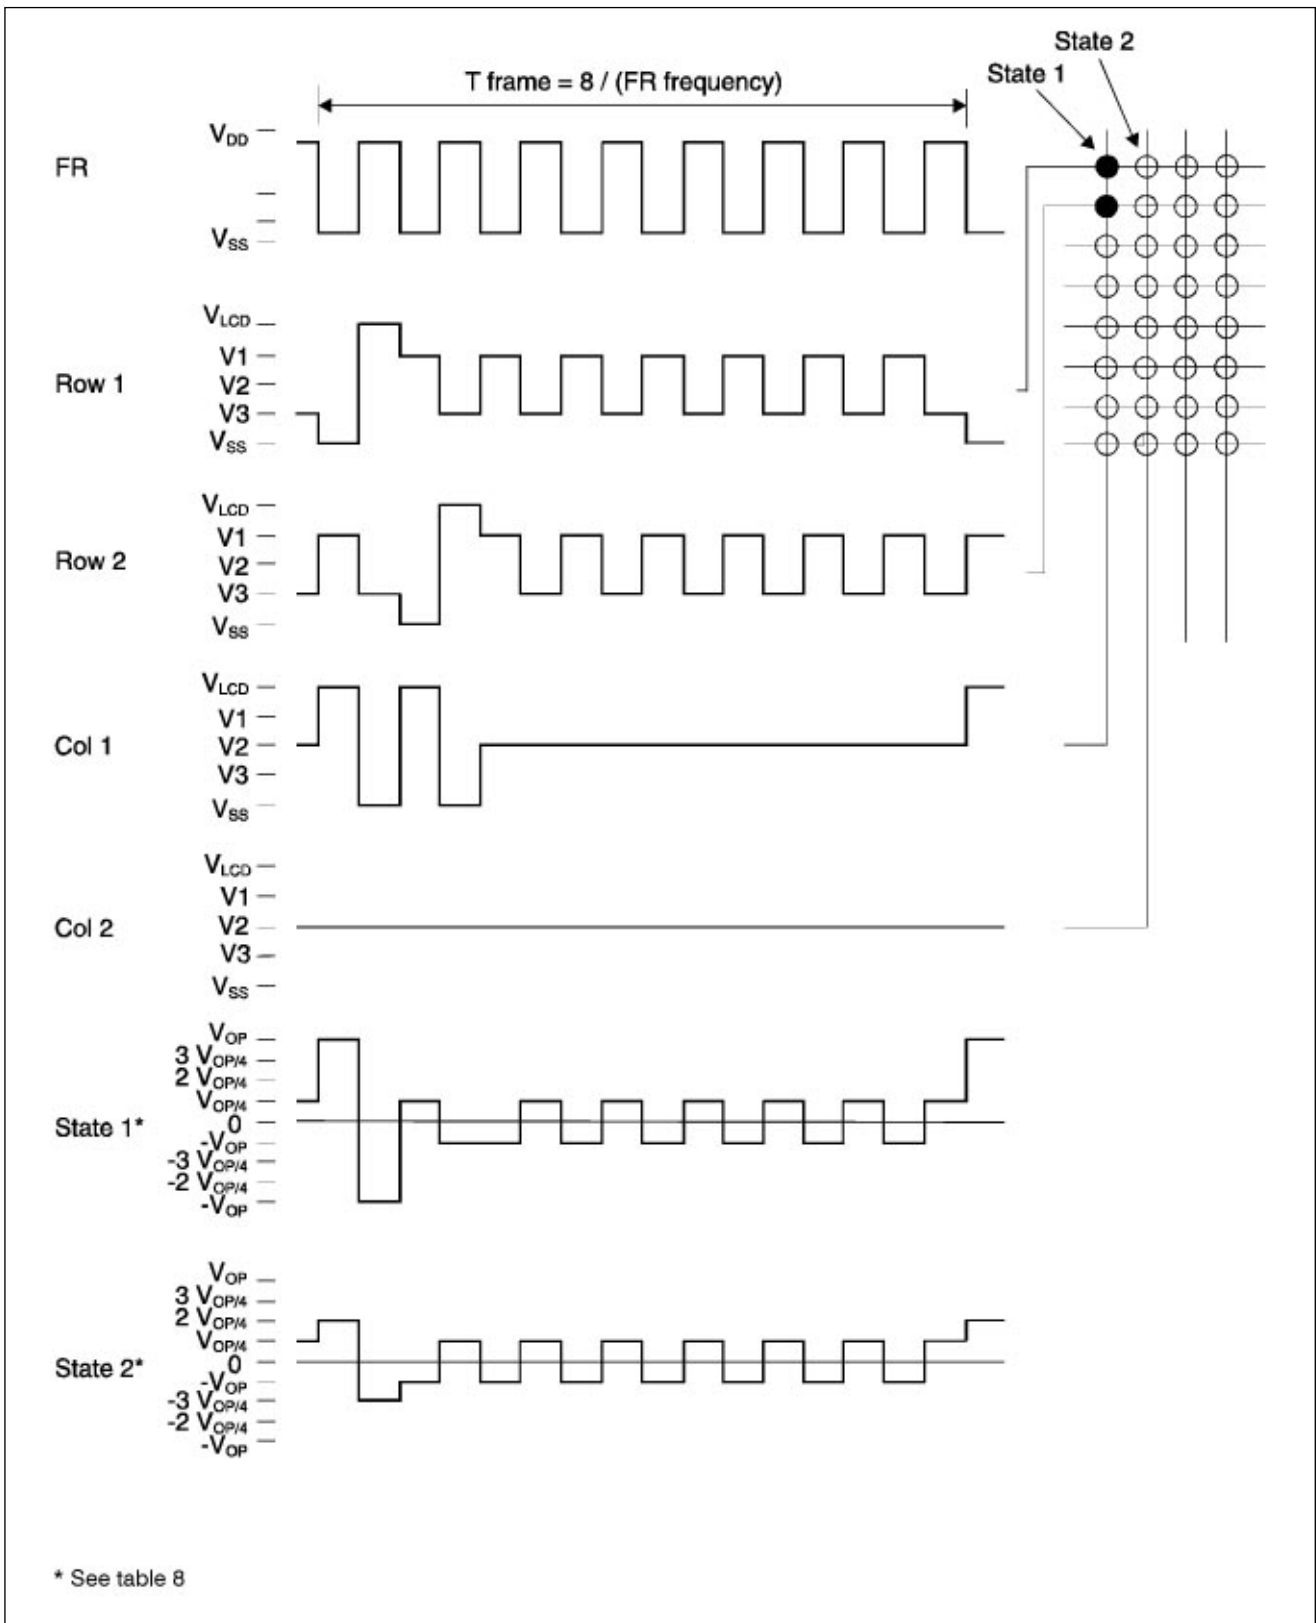


Fig. 9



Functional Description

Supply Voltages V_{LCD} , V_{DD} , V_{SS}

The voltage between V_{DD} and V_{SS} is the supply voltage for the logic and the interface. The voltage between V_{LCD} and V_{SS} is the supply voltage for the LCD and is used for the generation of the internal LCD bias level have a maximum impedance of 30K Ω for a voltage from 3 to 8.5V. Without external connections to the V1, V2, V3 bias level inputs, the V6123 can drive most medium sized LCD (pixel area up to 4'000mm²).

For displays with a wide variation in pixel sizes the configuration shown in Fig. 12 can give enhanced contrast by giving faster pixel switching times. On changing the row polarity (see Fig. 7, 8 and 9) the parallel capacitors lower the impedance of the bias level generation to the peak current, giving faster pixel charge times and thus a higher RMS "on" value. A higher RMS "on" value can give better contrast. If for a given LCD size and operating voltage, the "off" pixels appear "on", or there is poor contrast, then an external bias level generation circuit can be used with the V6123. An external bias generation circuit can lower the bias level impedance and hence improve the LCD contrast (see Fig.11). The optimum values of R, Rx and C, vary according to the LCD size used and V_{LCD} . They are best determined through actual experimentation with the LCD.

For LCD with very large average pixel area (eg. up to 10'000mm²) the bias level configuration shown in Fig. 13 should be used.

When V6123 are cascaded connect the V1, V2 and V3 bias inputs as shown in Fig. 10. The pixel load is averaged across all the cascaded drivers. This will give enhanced display contrast as the effective bias level source impedance is the parallel combination of the total number of drivers. For example, if two V6123 are cascaded as shown in Fig. 10, then the maximum bias level impedance becomes 15 k Ω for a V_{LCD} voltage from 3 to 8.5V.

Table 8 shows the relationship between V1, V2 and V3 for the multiplex rates 2, 4 and 8. Note that $V_{LCD} > V1 > V2 > V3$ for the V6123 2 and 8 mux programmed, and for the V6123 4 mux programmed, $V_{LCD} > V1 > V2$, and $V3 = V_{SS}$.

Data Input/Output

The data input pin, DI, is used to load serial data into the V6123. The serial data word length is 68 bits. Data is loaded in inverse numerical order, the data for bit 68 is loaded first with the data for bit 1 last. The column data bits are loaded first and then the command byte, (see Fig 5).

The data output pin, DO, is used in cascaded application (see Fig. 10). DO transfers the data to the next cascaded chip. The data at DO is equal to the data at DI delayed by 68 clock periods. In order to cascade V6123s, the DO of one chip must be connected to DI of the following chip (see Fig. 10). In cascaded applications the data for the last V6123 (the one that does not have DO connected) must be loaded first and the data for the first V6123 (its DI connected to the processor) loaded last.

The display RAM word length is 60 bits (see Fig. 6). Each LCD row has a corresponding display RAM address which provides the column data (on or off) when the row is selected (on). When down loading data to the V6123 any display RAM address can be chosen. Display RAM address is given by command bits 3 to 5. Bit 6 forces all column outputs at 0L (display OFF). Bit 7 forces all

column outputs at 1L (display ON). If bit 7 (SET) and bit 6 (BLANK) are both active, the initialization function is activated. This function is used to xynchronize the chip at row one. The command bit 2 (COL) define the V6123 as a row and column driver or column driver only. The V6123 functions as row and column driver while the bit 2 (COL) is inactive. When active the bit 2 configures the V6123 to function as column driver only. The former row output function as column outputs. In cascaded applications one V6123 should be used in the row and column configuration (\overline{COL} inactive) and the rest as pure column drivers (\overline{COL} active) (see Fig. 10). Note when cascading V6123s never cascade one mux mode no. with another. If a V6123 8 mux programmed is used to drive the rows then only V6123 8 mux programmed can be cascaded with it.

The command bits, bit 1 and bit 0, define the mux mode (see Fig. 5).

CLK input

The clock input is used to clock the DI serial data into the shift register, to latch the data from the shift register into the RAM.

After loading data into the shift register, the clock has to stay 0 logic during T_{STR} .

After T_{STR} pulse, the data are latched into the RAM.

FR Input / Output

The frame frequency is realized by an internal RC oscillator with a typical value of 55 Hz. The internal row frequency changes with the number of rows ($F_{ROW} = 55 \times n$, where $n = 2, 4$ or 8).

When bit 2 (COL) is inactive (row and column driver), the frame frequency is given by the internal oscillator. This frequency can also be used at FR output to drive cascaded V6123.

When bit 2 (\overline{COL}) is active (column driver only), the frame frequency is external then the frequency is given by the row and column driver directly to the FR input. In cascaded applications, the row and column driver (FR, output) give the frame frequency to all the cascaded chip (FR, input).

Driver Outputs S1 to S60

There are 60 LCD driver outputs on the V6123. When bit 2 (\overline{COL}) is inactive the outputs S1 to Sn function as row drivers and the outputs S(n+1) to S60 function as column drivers. Where n is the V6123 mux mode no. (2,4 or 8).

When bit 2 (\overline{COL}) is active all 60 outputs function as column drivers (see table 6). There is a one to one relationship between the display RAM and the LCD driver outputs. Each pixel (segment) driven by the V6123 on the LCD has a display RAM bit which corresponds to it. Setting the bit turns the segment "on" and clearing it turns it "off".

Power-Up

On power up the data in the shift registers, the display RAM, the sequencer driving the 2/4/8 rows and the 60 bit display latches are undefined.

Applications Two V6123 8 Mux Programmed Cascaded

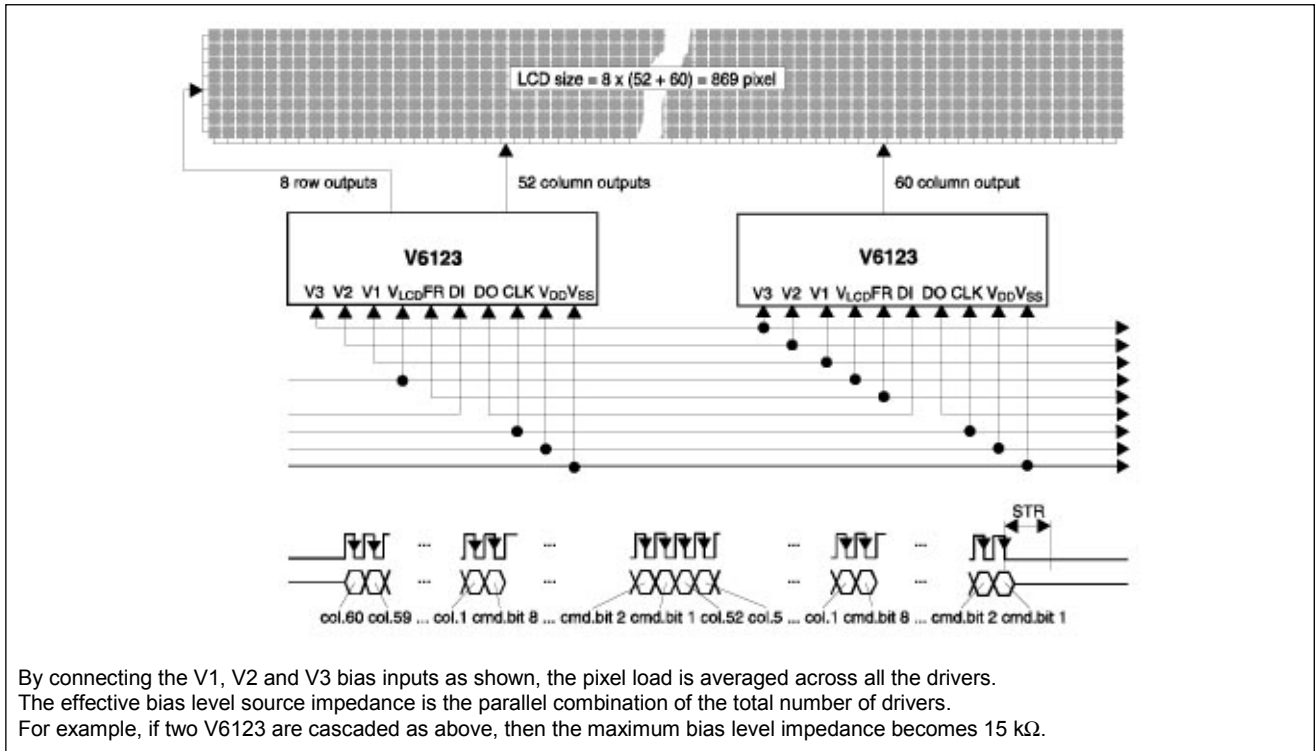


Fig. 10

V6123 8 Mux Programmed with External Resistor Divider Bias Generation

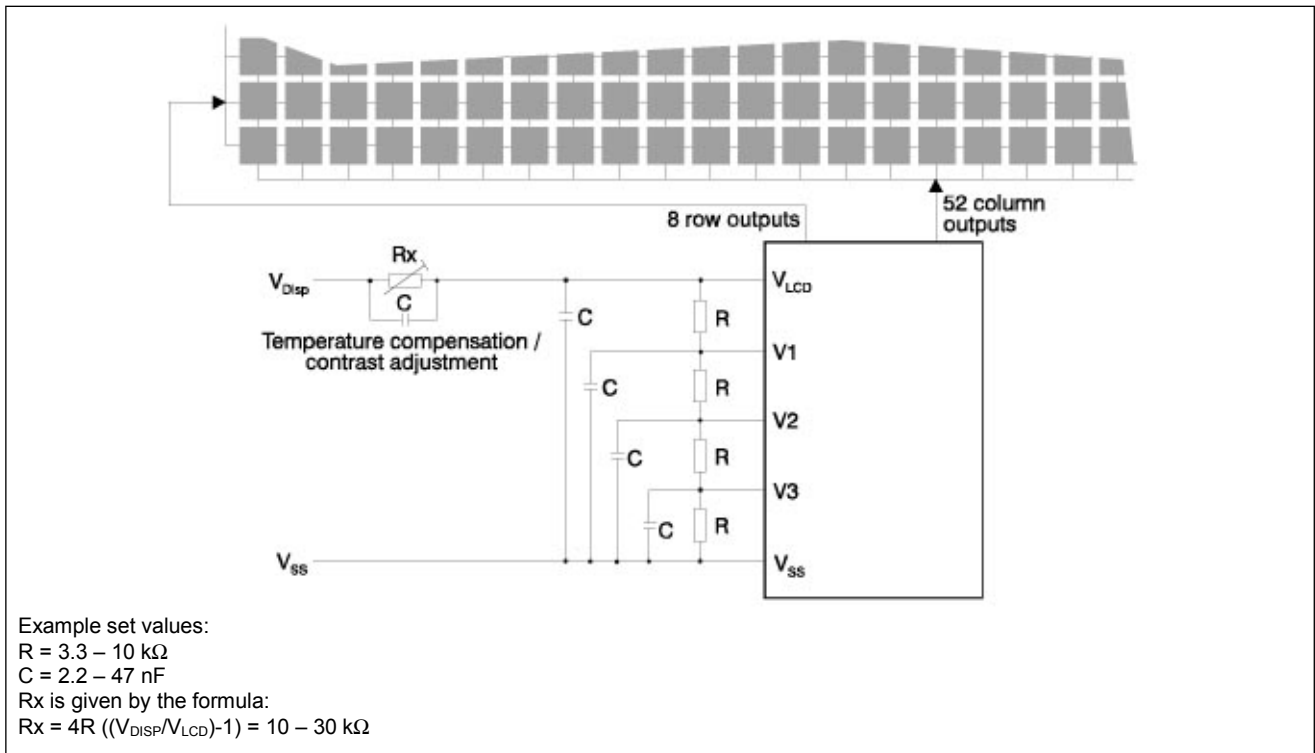


Fig. 11

Enhanced Switching from the V6123

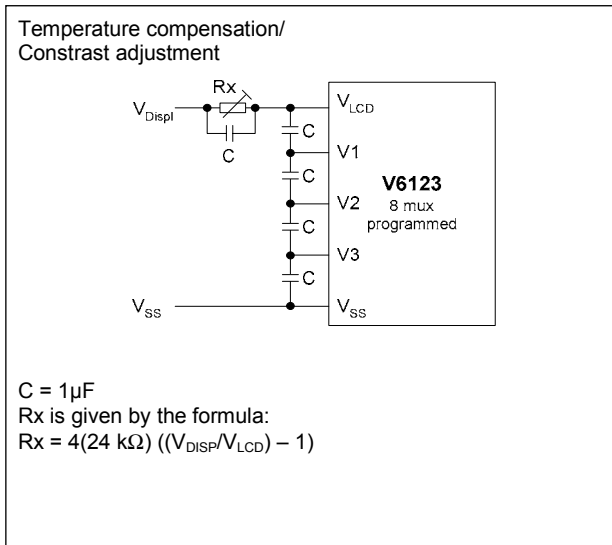


Fig. 12

Bias Configuration for Large LCD

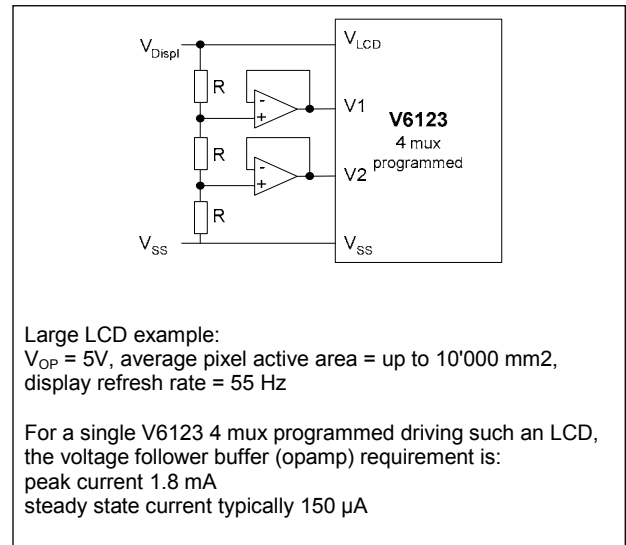


Fig. 13

Frame Frequency vs. Temperature at $V_{\text{DD}} = 4.5\text{V}$

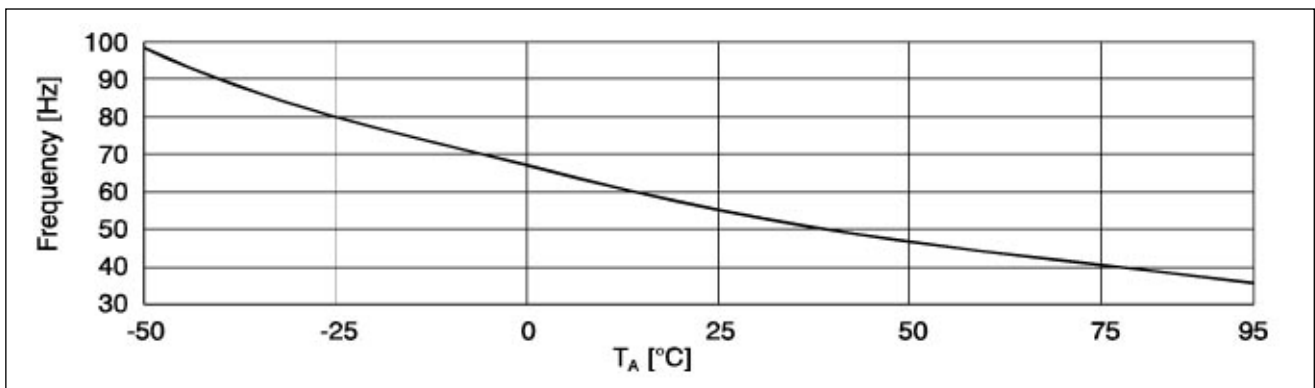


Fig. 14

Frame Frequency vs. V_{DD} at $T_A = 25^\circ\text{C}$


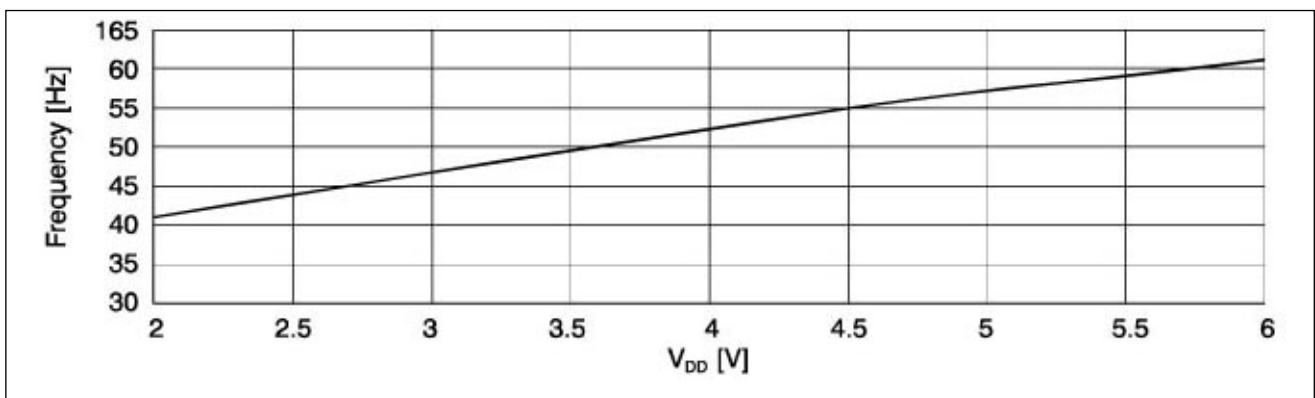


Fig. 15



V6123

Application Example

This table (Table 9) shows how to use the V6123 with a given initialization for **Chip-on-Glass**. Rows "Data" show the logical value to affect pad DI for each falling edge of pad CLK. After loading data into the shift register, the clock has to stay logic 0 during t_{STR} . After the t_{STR} pulse the data are latched into the RAM.

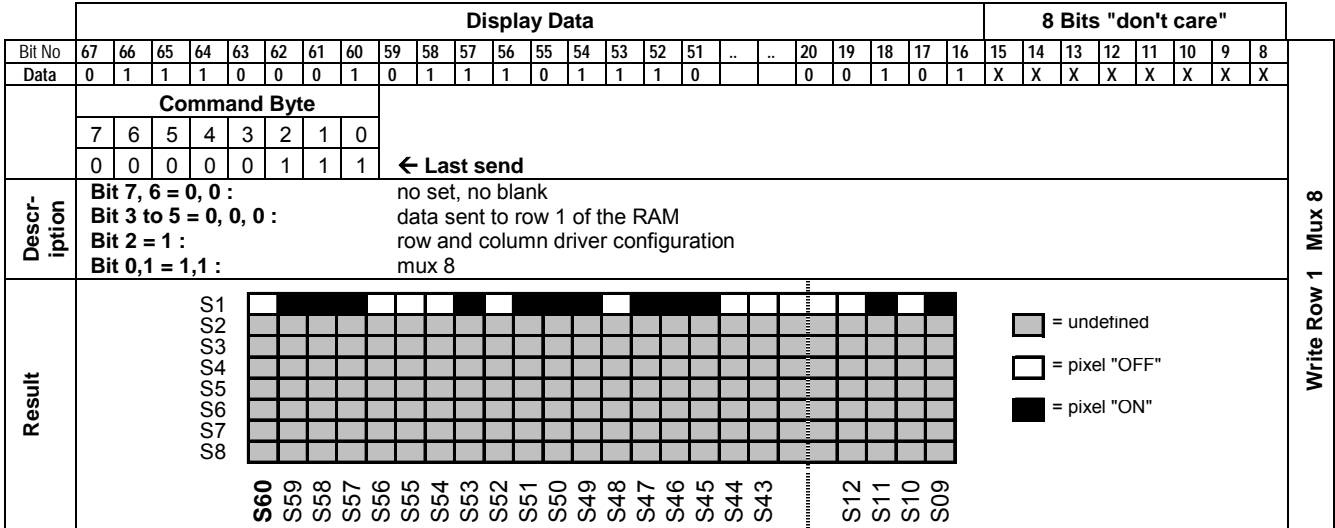


Fig. 16.01

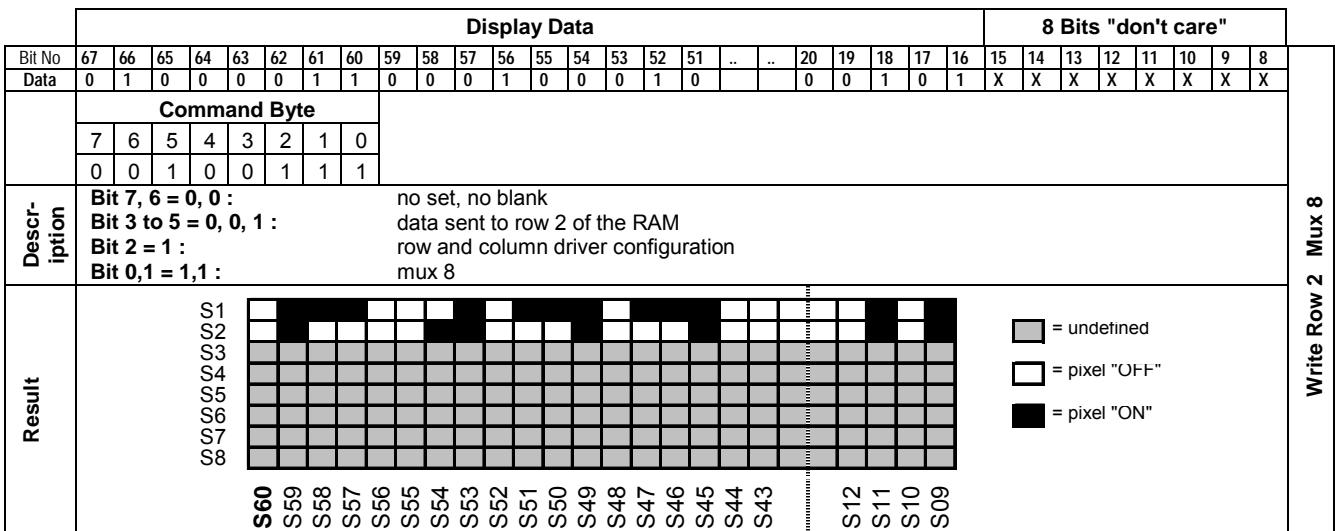


Fig. 16.02

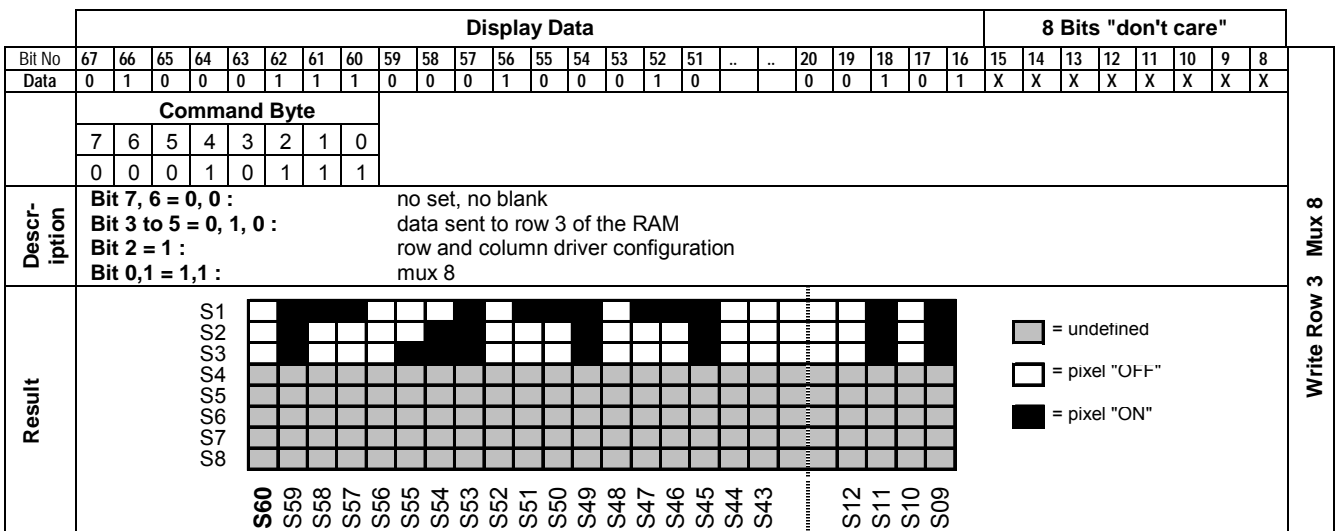


Fig. 16.03



V6123

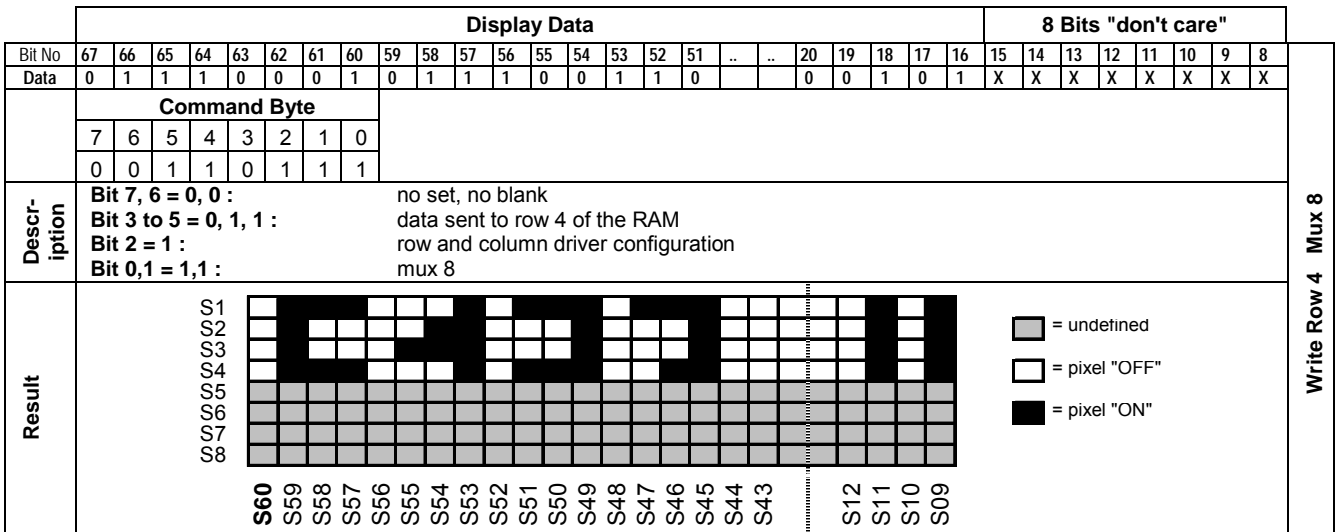


Fig. 16.04

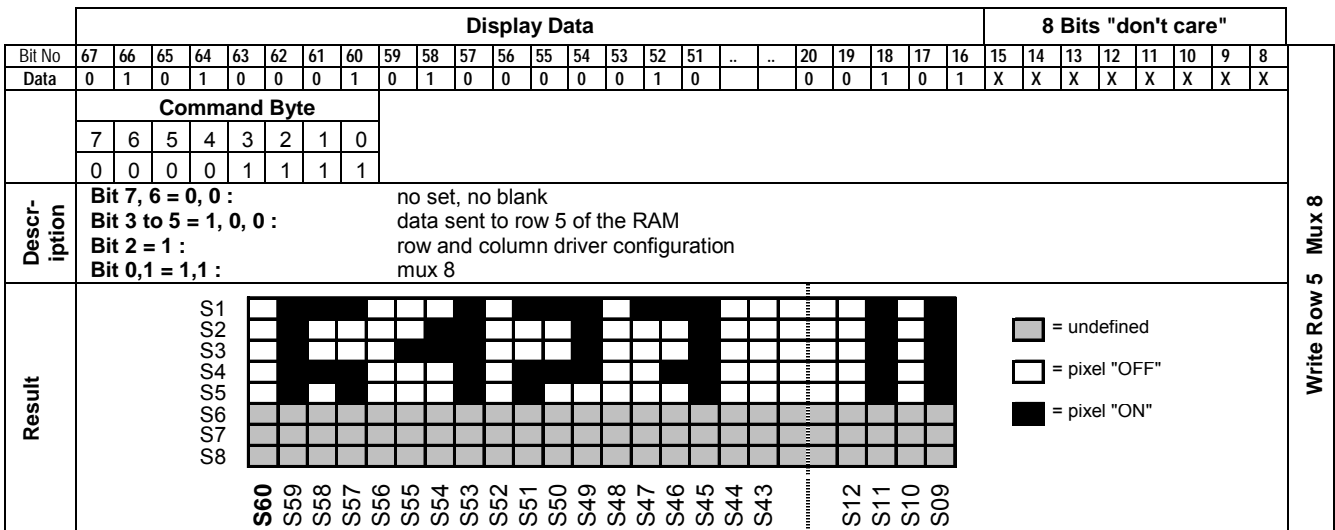


Fig. 16.05

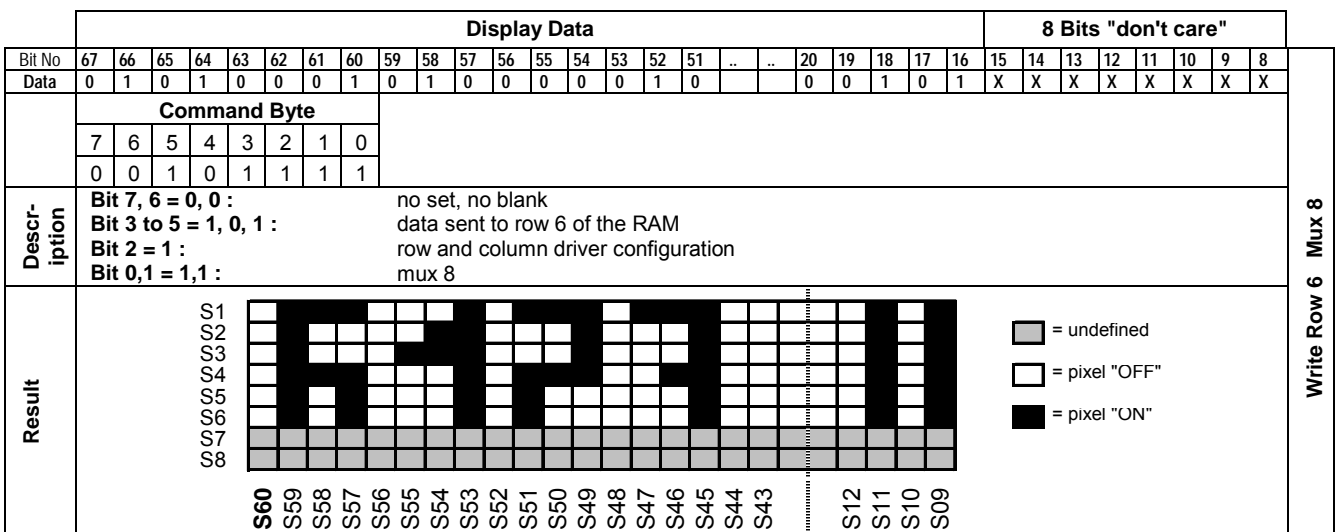


Fig. 16.06

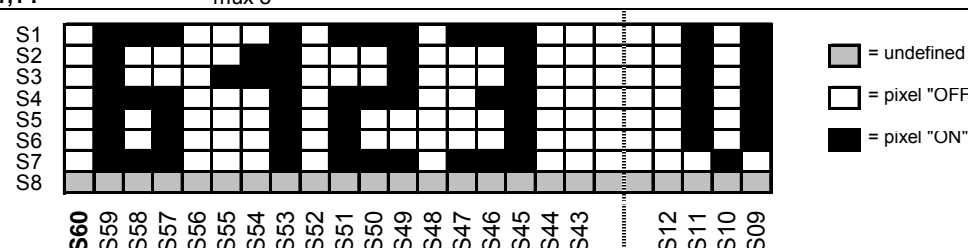
		Display Data																8 Bits "don't care"															
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data		0	1	1	0	0	0	1	0	1	1	1	0	1	1	1	0	0	0	0	1	0	X	X	X	X	X	X	X	X	X
		Command Byte																															
		7	6	5	4	3	2	1	0																								
		0	0	0	1	1	1	1	1																								
Descr- iption		Bit 7, 6 = 0, 0 :								no set, no blank																							
		Bit 3 to 5 = 1, 1, 0 :								data sent to row 7 of the RAM																							
		Bit 2 = 1 :								row and column driver configuration																							
		Bit 0,1 = 1,1 :								mux 8																							
Result																																	
		<p>S1</p> <p>S2</p> <p>S3</p> <p>S4</p> <p>S5</p> <p>S6</p> <p>S7</p> <p>S8</p> <p>S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43</p> <p>S12 S11 S10 S09</p>																															

Fig. 16.07

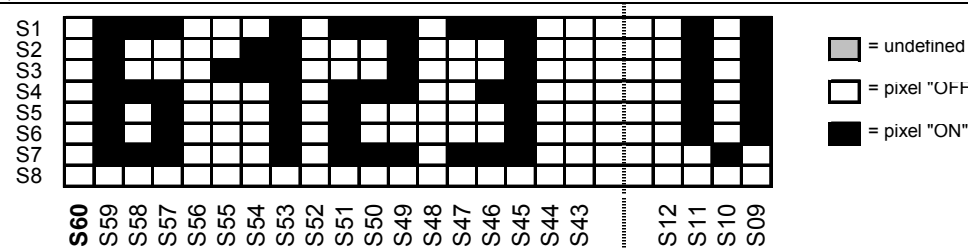
		Display Data																8 Bits "don't care"															
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	X	X	X	X	X	X	X	X	X
		Command Byte																															
		7	6	5	4	3	2	1	0																								
		0	0	1	1	1	1	1	1																								
Descr- iption		Bit 7, 6 = 0, 0 :								no set, no blank																							
		Bit 3 to 5 = 1, 1, 1 :								data sent to row 8 of the RAM																							
		Bit 2 = 1 :								row and column driver configuration																							
		Bit 0,1 = 1,1 :								mux 8																							
Result																																	
		<p>S1</p> <p>S2</p> <p>S3</p> <p>S4</p> <p>S5</p> <p>S6</p> <p>S7</p> <p>S8</p> <p>S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43</p> <p>S12 S11 S10 S09</p>																															

Fig. 16.08

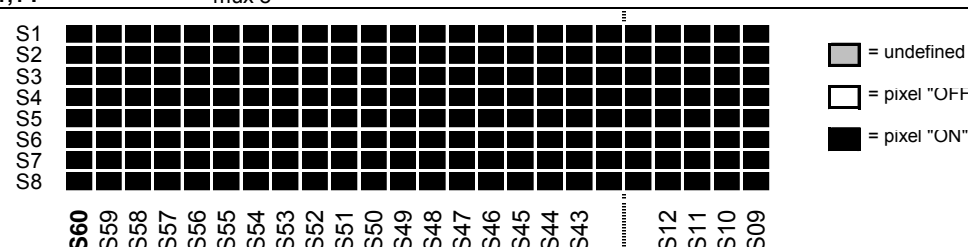
		Command Byte																							
Bit No		7	6	5	4	3	2	1	0																
Data		0	0	1	1	1	1	1	1																
Descr- iption		Bit 7, 6 = 1, 0 :								SET, no blank															
		Bit 3 to 5 = 1, 1, 1 :								data sent to row 8 of the RAM															
		Bit 2 = 1 :								row and column driver configuration															
		Bit 0,1 = 1,1 :								mux 8															
Result																									
		<p>S1</p> <p>S2</p> <p>S3</p> <p>S4</p> <p>S5</p> <p>S6</p> <p>S7</p> <p>S8</p> <p>S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43</p> <p>S12 S11 S10 S09</p>																							

Fig. 16.09

Table 9 cont.

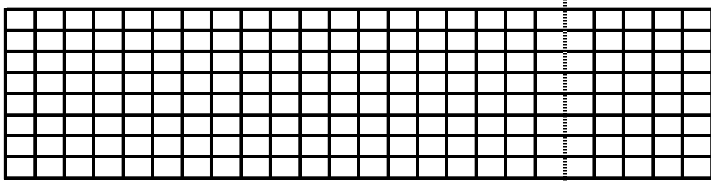

		Display Data																8 Bits "don't care"															
		Command Byte																															
Bit No		7	6	5	4	3	2	1	0																								
Data		0	1	1	1	1	1	1	1																								
Descr- iption		Bit 7, 6 = 0, 1 : no set, BLANK Bit 3 to 5 = 1, 1, 1 : data sent to row 8 of the RAM Bit 2 = 1 : row and column driver configuration Bit 0,1 = 1,1 : mux 8																															
Result																										Command Byte only: Blank							
		S1	S2	S3	S4	S5	S6	S7	S8	S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45		S44	S43	S12	S11	S10	S09	

Fig. 16.10

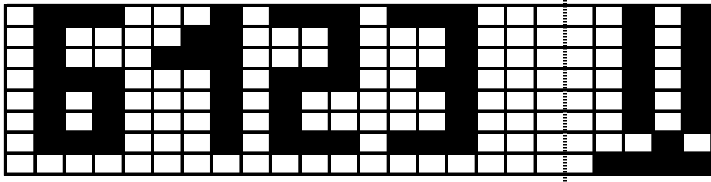

		Display Data																8 Bits "don't care"															
		Command Byte																															
Bit No		7	6	5	4	3	2	1	0																								
Data		1	1	0	0	0	1	1	1																								
Descr- iption		Bit 7, 6 = 1, 1 : no set, no blank → Synchronize the chip at row 1 Bit 3 to 5 = 0, 0, 0 : data sent to row 8 of the RAM, you have to rewrite row 8 of the RAM Bit 2 = 1 : row and column driver configuration Bit 0,1 = 1,1 : mux 8																															
Result																										Command Byte only: Synchro							
		S1	S2	S3	S4	S5	S6	S7	S8	S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45		S44	S43	S12	S11	S10	S09	

Fig. 16.11


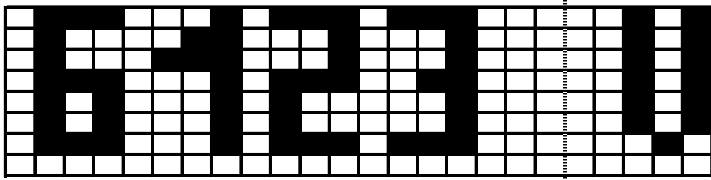

		Display Data																8 Bits "don't care"																																							
		Command Byte																																																							
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8																								
Data		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	X	X	X	X	X	X	X	X																								
Bit No		7	6	5	4	3	2	1	0																																																
Data		1	1	1	1	1	1	1	1																																																
Descr- iption		Bit 7, 6 = 1, 1 : no set, no blank → Synchronize the chip at row 1 Bit 3 to 5 = 1, 1, 1 : data sent to row 3 of the RAM Bit 2 = 1 : row and column driver configuration Bit 0,1 = 1,1 : mux 8																																																							
Result																										Synchro Rewrite Row 8 Mux 8																															
		S1	S2	S3	S4	S5	S6	S7	S8	S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45		S44	S43	S12	S11	S10	S09																									

Fig. 16.12



V6123

Table 9 cont.

		Display Data																8 Bits "don't care"														
Bit No	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	X	X	X	X
	Command Byte																															
	7	6	5	4	3	2	1	0																								
	0	0	0	0	0	1	1	0																								
Descr- iption	Bit 7, 6 = 0, 0 : Bit 3 to 5 = 0, 0, 0 : Bit 2 = 1 : Bit 0,1 = 0,1 :								no set, no blank data sent to row 1 of the RAM row and column driver configuration mux 4																							
Result	S1 S2 S3 S4 S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43 S12 S11 S10 S09								 = undefined = pixel "OFF" = pixel "ON"																							

Fig. 16.13

		Display Data																8 Bits "don't care"														
Bit No	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	X	X	X	X
	Command Byte																															
	7	6	5	4	3	2	1	0																								
	0	0	0	1	0	1	1	0																								
Descr- iption	Bit 7, 6 = 0, 0 : Bit 3 to 5 = 0, 0, 1 : Bit 2 = 1 : Bit 0,1 = 0,1 :								no set, no blank data sent to row 2 of the RAM row and column driver configuration mux 4																							
Result	S1 S2 S3 S4 S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43 S12 S11 S10 S09								 = undefined = pixel "OFF" = pixel "ON"																							

Fig. 16.14

		Display Data																8 Bits "don't care"														
Bit No	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	X	X	X	X
	Command Byte																															
	7	6	5	4	3	2	1	0																								
	0	0	0	1	0	1	1	0																								
Descr- iption	Bit 7, 6 = 0, 0 : Bit 3 to 5 = 0, 1, 0 : Bit 2 = 1 : Bit 0,1 = 0,1 :								no set, no blank data sent to row 3 of the RAM row and column driver configuration mux 4																							
Result	S1 S2 S3 S4 S60 S59 S58 S57 S56 S55 S54 S53 S52 S51 S50 S49 S48 S47 S46 S45 S44 S43 S12 S11 S10 S09								 = undefined = pixel "OFF" = pixel "ON"																							

Fig. 16.15

Table 9 cont.

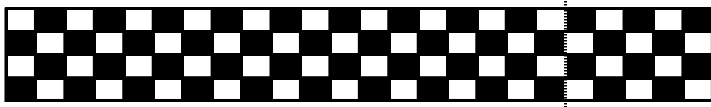

		Display Data														8 Bits "don't care"																	
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data		1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	X	X	X	X
Descr- iption	Command Byte																																
		7	6	5	4	3	2	1	0																								
		0	0	1	1	0	1	1	0																								
Result	S1 S2 S3 S4																																
		S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45	S44	S43	S12	S11	S10	S09										

Fig. 16.16



		Display Data														8 Bits "don't care"																	
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data		0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	X	X
Descr- iption	Command Byte																																
		7	6	5	4	3	2	1	0																								
		0	0	0	0	0	1	0	0																								
Result	S1 S2																																
		S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45	S44	S43	S12	S11	S10	S09										

Fig. 16.17




		Display Data														8 Bits "don't care"																	
Bit No		67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	20	19	18	17	16	15	14	13	12	11	10	9	8
Data		0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	X	X
Descr- iption	Command Byte																																
		7	6	5	4	3	2	1	0																								
		0	0	1	0	0	1	0	0																								
Result	S1 S2																																
		S60	S59	S58	S57	S56	S55	S54	S53	S52	S51	S50	S49	S48	S47	S46	S45	S44	S43	S12	S11	S10	S09										

Fig. 16.18



Package Information

Dimensions of Chip Form

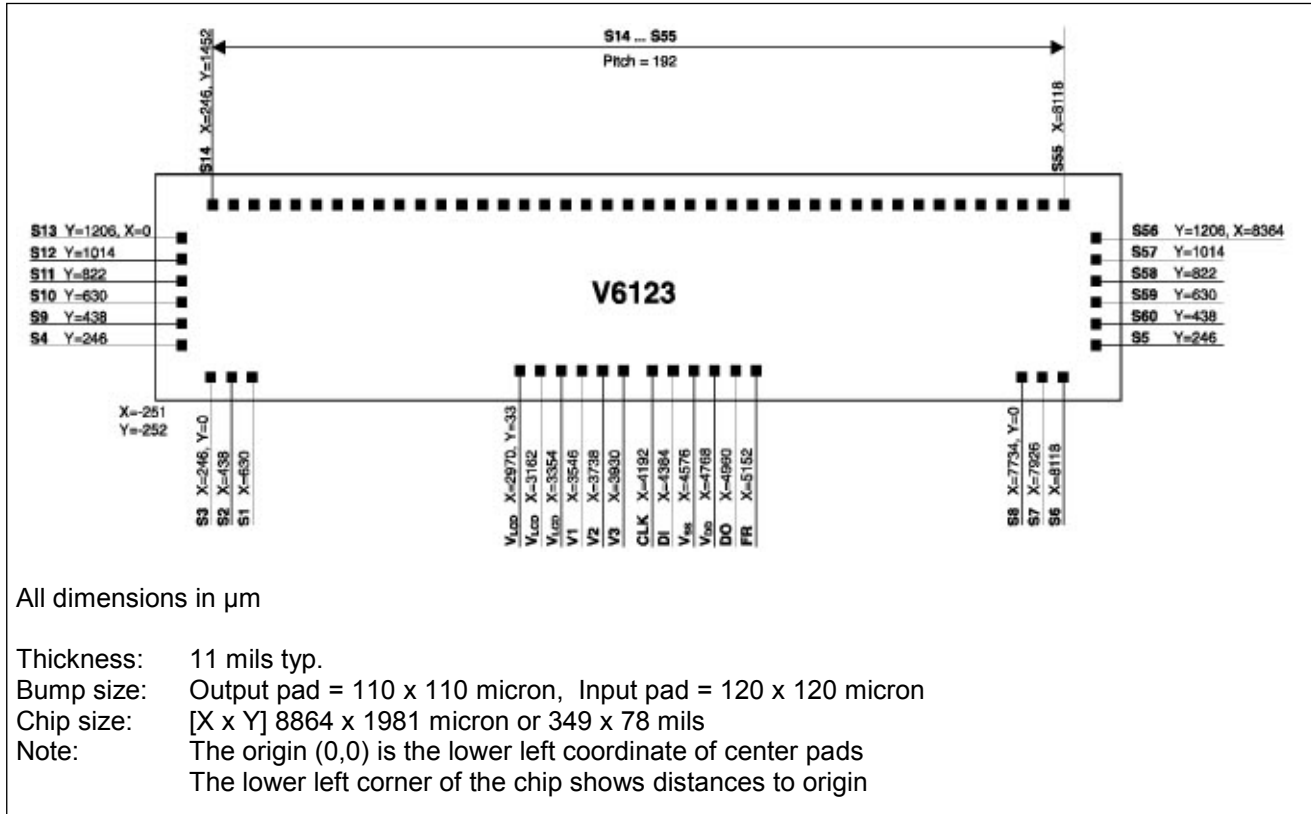


Fig. 17

Ordering Information

The V6123 is available in the following packages:

- Chip form : V6123 Chip
- Bumped form : V6123 Bumped

When ordering please specify the complete part number and package.

EM Microelectronic-Marín SA cannot assume responsibility for use of any circuitry described other than circuitry entirely embodied in an EM Microelectronic-Marín SA product. EM Microelectronic-Marín SA reserves the right to change the circuitry and specifications without notice at any time. You are strongly urged to ensure that the information given has not been superseded by a more up-to-date version.