

Features

- Operating voltage: 2.7V~5.2V
- Built-in RC oscillator
- External 32.768kHz crystal or 32kHz frequency source input
- 1/5 bias, 1/16 duty, frame frequency is 64Hz
- Max. 48×16 patterns, 16 commons, 48 segments
- Built-in internal resistor type bias generator
- 3-wire serial interface
- 8 kinds of time base or WDT selection
- Time base or WDT overflow output
- Built-in LCD display RAM
- R/W address auto increment
- Two selection buzzer frequencies (2kHz or 4kHz)
- Power down command reduces power consumption
- Software configuration feature
- Data mode and Command mode instructions
- Three data accessing modes
- VLCD pin to adjust LCD operating voltage
- Cascade application
- 100-pin QFP package

General Description


HT1626 is a peripheral device specially designed for I/O type MCU used to expand the display capability. The max. display segment of the device are 768 patterns (48×16). It also supports serial interface, buzzer sound, Watchdog Timer or time base timer functions. The HT1626 is a memory mapping and multi-function LCD controller. The software configuration feature of the

HT1626 make it suitable for multiple LCD applications including LCD modules and display subsystems. Only three lines are required for the interface between the host controller and the HT1626. The HT162X series have many kinds of products that match various applications.


Selection Table

| HT162X | HT1620 | HT1621 | HT1622 | HT16220 | HT1623 | HT1625 | HT1626 |
|----------------------|--------|--------|--------|---------|--------|--------|-----------|
| COM | 4 | 4 | 8 | 8 | 8 | 8 | 16 |
| SEG | 32 | 32 | 32 | 32 | 48 | 64 | 48 |
| Built-in Osc. | — | √ | √ | — | √ | √ | √ |
| Crystal Osc. | √ | √ | — | √ | √ | √ | √ |

Block Diagram

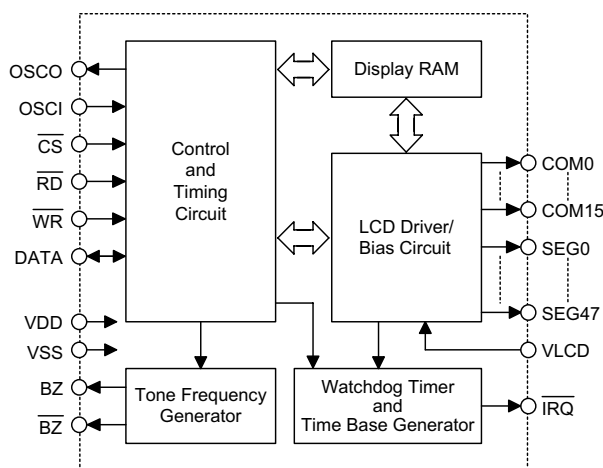

Pin Assignment

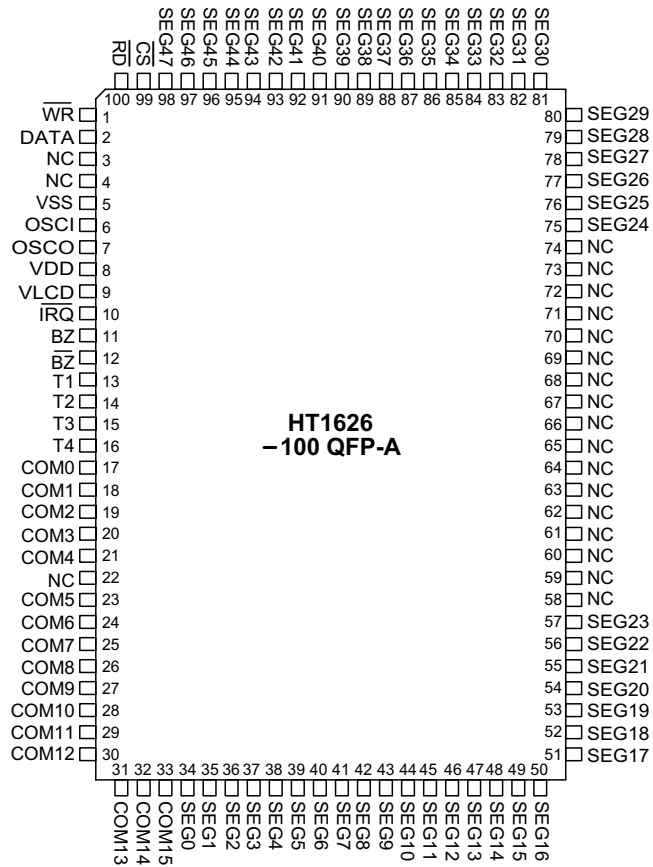

Pad Coordinates

Unit: mil

| Pad No. | X | Y | Pad No. | X | Y |
|---------|---------|--------|---------|--------|--------|
| 1 | -115.68 | 77.99 | 41 | 47.47 | -92.74 |
| 2 | -115.68 | 71.36 | 42 | 54.10 | -92.74 |
| 3 | -113.69 | 54.83 | 43 | 60.73 | -92.74 |
| 4 | -114.92 | 46.62 | 44 | 67.36 | -92.74 |
| 5 | -115.68 | 37.10 | 45 | 73.99 | -92.74 |
| 6 | -115.68 | 23.80 | 46 | 80.62 | -92.74 |
| 7 | -115.68 | 4.21 | 47 | 87.25 | -92.74 |
| 8 | -114.92 | -6.29 | 48 | 93.88 | -92.74 |
| 9 | -114.92 | -18.27 | 49 | 100.51 | -92.74 |
| 10 | -114.92 | -24.91 | 50 | 107.14 | -92.74 |
| 11 | -114.92 | -36.89 | 51 | 113.77 | -92.74 |
| 12 | -114.92 | -43.52 | 52 | 114.88 | 92.74 |
| 13 | -114.92 | -55.51 | 53 | 108.25 | 92.74 |
| 14 | -114.92 | -62.13 | 54 | 101.62 | 92.74 |
| 15 | -114.92 | -74.12 | 55 | 94.99 | 92.74 |
| 16 | -114.92 | -80.75 | 56 | 88.36 | 92.74 |
| 17 | -114.92 | -92.74 | 57 | 81.73 | 92.74 |
| 18 | -105.02 | -92.74 | 58 | 75.10 | 92.74 |
| 19 | -98.39 | -92.74 | 59 | 68.47 | 92.74 |
| 20 | -91.76 | -92.74 | 60 | 61.84 | 92.74 |
| 21 | -85.13 | -92.74 | 61 | 55.21 | 92.74 |
| 22 | -78.50 | -92.74 | 62 | 48.58 | 92.74 |
| 23 | -71.87 | -92.74 | 63 | 41.95 | 92.74 |
| 24 | -65.24 | -92.74 | 64 | 35.32 | 92.74 |
| 25 | -58.61 | -92.74 | 65 | 28.69 | 92.74 |
| 26 | -51.98 | -92.74 | 66 | 22.06 | 92.74 |
| 27 | -45.35 | -92.74 | 67 | 15.43 | 92.74 |
| 28 | -38.72 | -92.74 | 68 | 8.80 | 92.74 |
| 29 | -32.09 | -92.74 | 69 | 2.17 | 92.74 |
| 30 | -25.46 | -92.74 | 70 | -4.46 | 92.74 |
| 31 | -18.83 | -92.74 | 71 | -11.09 | 92.74 |
| 32 | -12.20 | -92.74 | 72 | -17.72 | 92.74 |
| 33 | -5.57 | -92.74 | 73 | -24.35 | 92.74 |
| 34 | 1.06 | -92.74 | 74 | -30.98 | 92.74 |
| 35 | 7.69 | -92.74 | 75 | -37.61 | 92.74 |
| 36 | 14.32 | -92.74 | 76 | -44.24 | 92.74 |
| 37 | 20.95 | -92.74 | 77 | -50.87 | 92.74 |
| 38 | 27.58 | -92.74 | 78 | -57.50 | 92.74 |
| 39 | 34.21 | -92.74 | 79 | -68.04 | 92.74 |
| 40 | 40.84 | -92.74 | 80 | -82.71 | 91.97 |

Pad Description

| Pad No. | Pad Name | I/O | Description |
|---------|----------------------------|-----|--|
| 1 | OSCI | I | The OSCI and OSCO pads are connected to a 32.768kHz crystal in order to generate a system clock. If the system clock comes from an external clock source, the external clock source should be connected to the OSCI pad. But if an on-chip RC oscillator is selected instead, the OSCI and OSCO pads can be left open. |
| 2 | OSCO | O | |
| 3 | VDD | — | Positive power supply |
| 4 | VLCD | I | LCD operating voltage input pad. |
| 5 | $\overline{\text{IRQ}}$ | O | Time base or Watchdog Timer overflow flag, NMOS open drain output |
| 6, 7 | BZ, $\overline{\text{BZ}}$ | O | 2kHz or 4kHz tone frequency output pair |
| 8~11 | T1~T4 | I | Not connected |
| 12~27 | COM0~COM15 | O | LCD common outputs |
| 28~75 | SEG0~SEG47 | O | LCD segment outputs |
| 76 | $\overline{\text{CS}}$ | I | Chip selection input with pull-high resistor. When the $\overline{\text{CS}}$ is logic high, the data and command read from or write to the HT1626 are disabled. The serial interface circuit is also reset. But if the $\overline{\text{CS}}$ is at logic low level and is input to the $\overline{\text{CS}}$ pad, the data and command transmission between the host controller and the HT1626 are all enabled. |
| 77 | $\overline{\text{RD}}$ | I | READ clock input with pull-high resistor. Data in the RAM of the HT1626 are clocked out on the falling edge of the $\overline{\text{RD}}$ signal. The clocked out data will appear on the data line. The host controller can use the next rising edge to latch the clocked out data. |
| 78 | $\overline{\text{WR}}$ | I | WRITE clock input with pull-high resistor. Data on the DATA line are latched into the HT1626 on the rising edge of the $\overline{\text{WR}}$ signal. |
| 79 | DATA | I/O | Serial data input or output with pull-high resistor |
| 80 | VSS | — | Negative power supply, ground |

Absolute Maximum Ratings

| | | | |
|----------------------|--------------------------------|-----------------------------|----------------|
| Supply Voltage | -0.3V to 5.5V | Storage Temperature | -50°C to 125°C |
| Input Voltage | $V_{SS}-0.3V$ to $V_{DD}+0.3V$ | Operating Temperature | -25°C to 75°C |

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

D.C. Characteristics

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|-------------------|--|-----------------|---|------|------|------|------|
| | | V _{DD} | Conditions | | | | |
| V _{DD} | Operating Voltage | — | — | 2.7 | — | 5.2 | V |
| I _{DD1} | Operating Current | 3V | No load or LCD ON | — | 155 | 310 | μA |
| | | 5V | On-chip RC oscillator | — | 260 | 420 | μA |
| I _{DD2} | Operating Current | 3V | No load or LCD ON | — | 150 | 310 | μA |
| | | 5V | Crystal oscillator | — | 250 | 420 | μA |
| I _{DD11} | Operating Current | 3V | No load or LCD OFF | — | 8 | 30 | μA |
| | | 5V | On-chip RC oscillator | — | 20 | 60 | μA |
| I _{DD22} | Operating Current | 3V | No load or LCD OFF | — | — | 20 | μA |
| | | 5V | Crystal oscillator | — | — | 35 | μA |
| I _{STB} | Standby Current | 3V | No load, Power down mode | — | 1 | 12 | μA |
| | | 5V | | — | 2 | 24 | μA |
| V _{IL} | Input Low Voltage | 3V | DATA, \overline{WR} , \overline{CS} , \overline{RD} | 0 | — | 0.6 | V |
| | | 5V | | 0 | — | 1.0 | V |
| V _{IH} | Input High Voltage | 3V | DATA, \overline{WR} , \overline{CS} , \overline{RD} | 2.4 | — | 3 | V |
| | | 5V | | 4.0 | — | 5 | V |
| I _{OL1} | BZ, \overline{BZ} , \overline{IRQ} | 3V | V _{OL} =0.3V | 0.9 | 1.8 | — | mA |
| | | 5V | V _{OL} =0.5V | 1.7 | 3 | — | mA |
| I _{OH1} | BZ, \overline{BZ} | 3V | V _{OH} =2.7V | -0.9 | -1.8 | — | mA |
| | | 5V | V _{OH} =4.5V | -1.7 | -3 | — | mA |
| I _{OL1} | DATA | 3V | V _{OL} =0.3V | 0.9 | 1.8 | — | mA |
| | | 5V | V _{OL} =0.5V | 1.7 | 3 | — | mA |
| I _{OH1} | DATA | 3V | V _{OH} =2.7V | -0.9 | -1.8 | — | mA |
| | | 5V | V _{OH} =4.5V | -1.7 | -3 | — | mA |
| I _{OL2} | LCD Common Sink Current | 3V | V _{OL} =0.3V | 80 | 160 | — | μA |
| | | 5V | V _{OL} =0.5V | 180 | 360 | — | μA |
| I _{OH2} | LCD Common Source Current | 3V | V _{OH} =2.7V | -40 | -80 | — | μA |
| | | 5V | V _{OH} =4.5V | -90 | -180 | — | μA |
| I _{OL3} | LCD Segment Sink Current | 3V | V _{OL} =0.3V | 50 | 100 | — | μA |
| | | 5V | V _{OL} =0.5V | 120 | 240 | — | μA |
| I _{OH3} | LCD Segment Source Current | 3V | V _{OH} =2.7V | -30 | -60 | — | μA |
| | | 5V | V _{OH} =4.5V | -70 | -140 | — | μA |
| R _{PH} | Pull-high Resistor | 3V | DATA, \overline{WR} , \overline{CS} , \overline{RD} | 100 | 200 | 300 | kΩ |
| | | 5V | | 50 | 100 | 150 | kΩ |

A.C. Characteristics

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---------------------------------|--|-----------------|-----------------------|------|--------------------|------|------|
| | | V _{DD} | Conditions | | | | |
| f _{SYS1} | System Clock | 3V | On-chip RC oscillator | 22 | 32 | 40 | kHz |
| | | 5V | | 24 | 32 | 40 | |
| f _{SYS2} | System Clock | 3V | External clock source | — | 32 | — | kHz |
| | | 5V | | — | 32 | — | |
| f _{LCD1} | LCD Frame Frequency | 3V | On-chip RC oscillator | 44 | 64 | 80 | Hz |
| | | 5V | | 48 | 64 | 80 | |
| f _{LCD2} | LCD Frame Frequency | 3V | External clock source | — | 64 | — | Hz |
| | | 5V | | — | 64 | — | |
| t _{COM} | LCD Common Period | — | n: Number of COM | — | n/f _{LCD} | — | sec |
| f _{CLK1} | Serial Data Clock (\overline{WR} Pin) | 3V | Duty cycle 50% | — | — | 150 | kHz |
| | | 5V | | — | — | 300 | |
| f _{CLK2} | Serial Data Clock (\overline{RD} Pin) | 3V | Duty cycle 50% | — | — | 75 | kHz |
| | | 5V | | — | — | 150 | |
| t _{CS} | Serial Interface Reset Pulse Width (Figure 3) | — | \overline{CS} | — | 250 | — | ns |
| t _{CLK} | \overline{WR} , \overline{RD} Input Pulse Width (Figure 1) | 3V | Write mode | 3.34 | — | — | μs |
| | | | Read mode | 6.67 | — | — | |
| | | 5V | Write mode | 1.67 | — | — | μs |
| | | | Read mode | 3.34 | — | — | |
| t _r , t _f | Rise or Fall Time Serial Data Clock Width (Figure 1) | 3V | — | — | 120 | — | ns |
| | | 5V | | | | | |
| t _{su} | Setup Time for DATA to \overline{WR} , \overline{RD} Clock Width (Figure 2) | 3V | — | — | 120 | — | ns |
| | | 5V | | | | | |
| t _h | Hold Time for DATA to \overline{WR} , \overline{RD} Clock Width (Figure 2) | 3V | — | — | 120 | — | ns |
| | | 5V | | | | | |
| t _{su1} | Setup Time for \overline{CS} to \overline{WR} , \overline{RD} Clock Width (Figure 3) | 3V | — | — | 100 | — | ns |
| | | 5V | | | | | |
| t _{h1} | Hold Time for \overline{CS} to \overline{WR} , \overline{RD} Clock Width (Figure 3) | 3V | — | — | 100 | — | ns |
| | | 5V | | | | | |

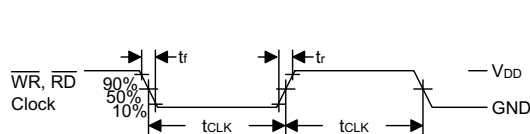


Figure 1

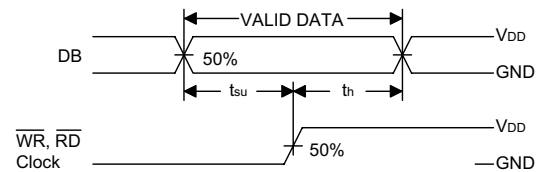


Figure 2

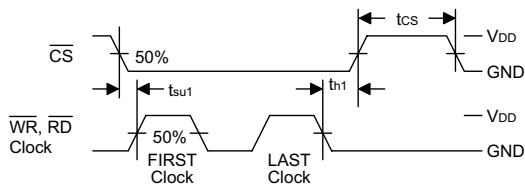


Figure 3

Functional Description

Display memory – RAM structure

The static display RAM is organized into 192x4 bits and stores the display data. The contents of the RAM are directly mapped to the contents of the LCD driver. Data in the RAM can be accessed by the READ, WRITE and READ-MOD-

IFY-WRITE commands. The following is a mapping from the RAM to the LCD patterns.

Time base and Watchdog Timer – WDT

The time base generator and WDT share the same divided (/256) counter. TIMER DIS/EN/CLR, WDT DIS/EN/CLR and \overline{IRQ} EN/DIS are independent from each other. Once the WDT time-out occurs, the \overline{IRQ} pin will remain at logic low level until the CLR WDT or the \overline{IRQ} DIS command is issued.



If an external clock is selected as the source of system frequency, the SYS DIS command turns out invalid and the power down mode fails to be carried out until the external clock source is removed.

Buzzer tone output

A simple tone generator is implemented in the HT1626. The tone generator can output a pair of differential driving signals on the BZ and \overline{BZ} which are used to generate a single tone.

Command format

The HT1626 can be configured by the software setting. There are two mode commands to configure the HT1626 resource and to transfer the LCD display data.

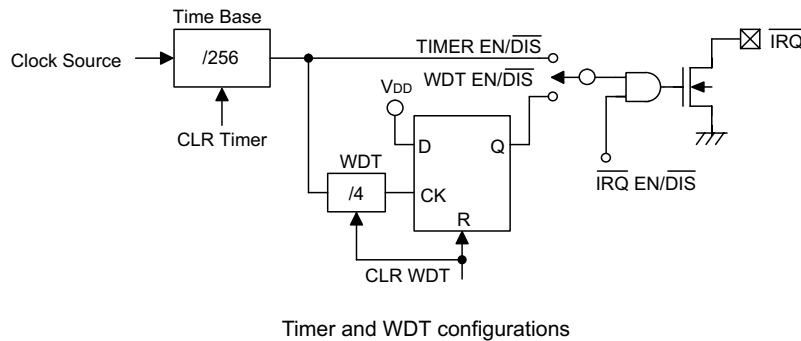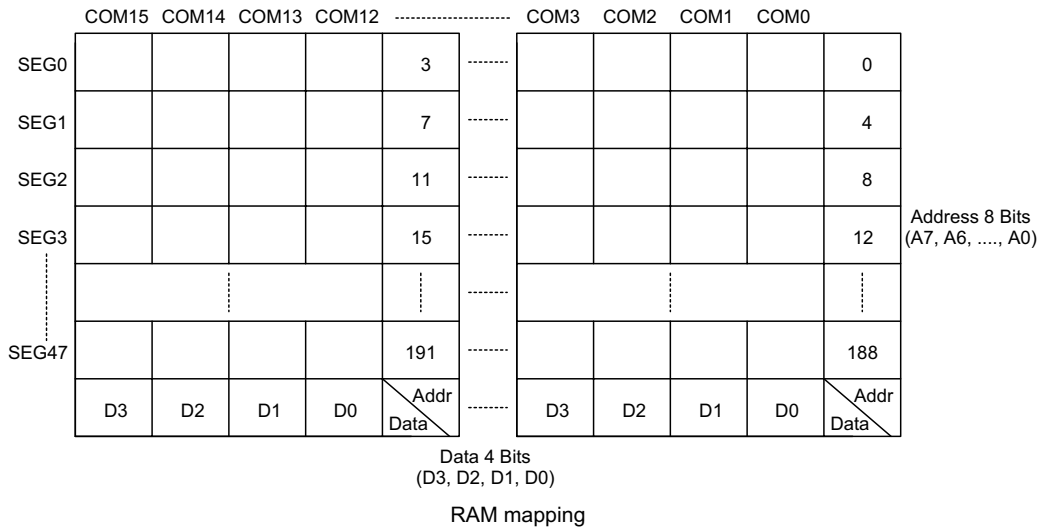

The following are the data mode ID and the command mode ID:


| Operation | Mode | ID |
|-------------------|---------|-------|
| READ | Data | 1 1 0 |
| WRITE | Data | 1 0 1 |
| READ-MODIFY-WRITE | Data | 1 0 1 |
| COMMAND | Command | 1 0 0 |

If successive commands have been issued, the command mode ID can be omitted. While the system is operating in the non-successive command or the non-successive address data mode, the CS pin should be set to "1", and the previous operation mode will be reset also. The CS pin returns to "0", a new operation mode ID should be issued first.


| Name | Command Code | Function |
|----------|--------------|---|
| TONE OFF | 0000-1000-X | Turn-off tone output |
| TONE 4K | 010X-XXXX-X | Turn-on tone output, tone frequency is 4kHz |
| TONE 2K | 0110-XXXX-X | Turn-on tone output, tone frequency is 2kHz |

Timing Diagrams


READ mode (command code : 1 1 0)

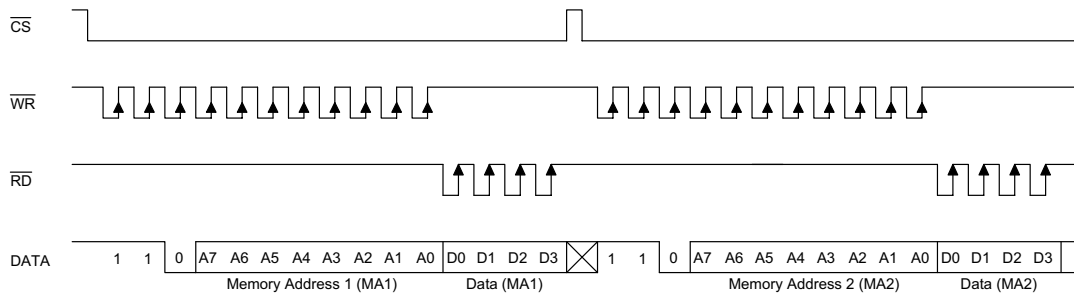


READ mode (successive address reading)

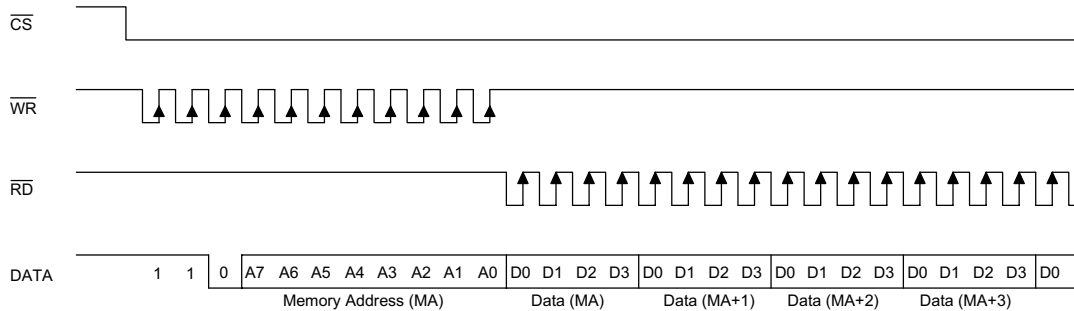


WRITE mode (command code : 1 0 1)

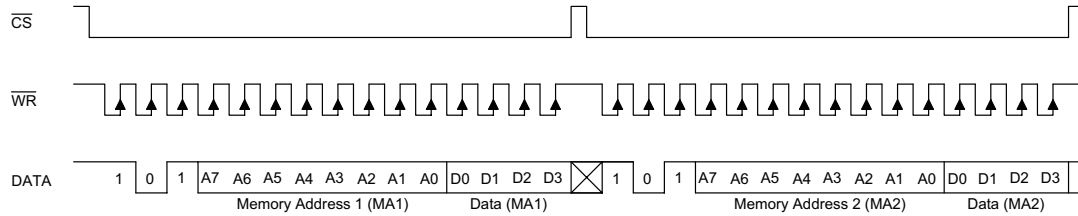


WRITE mode (successive address writing)

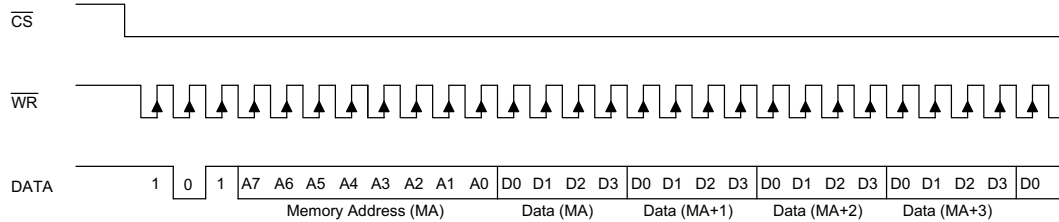


READ-MODIFY-WRITE mode (command code : 1 0 1)

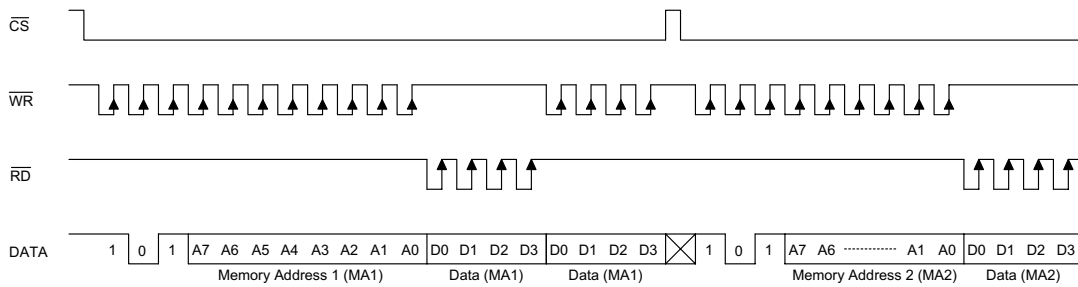


READ-MODIFY-WRITE mode (successive address accessing)

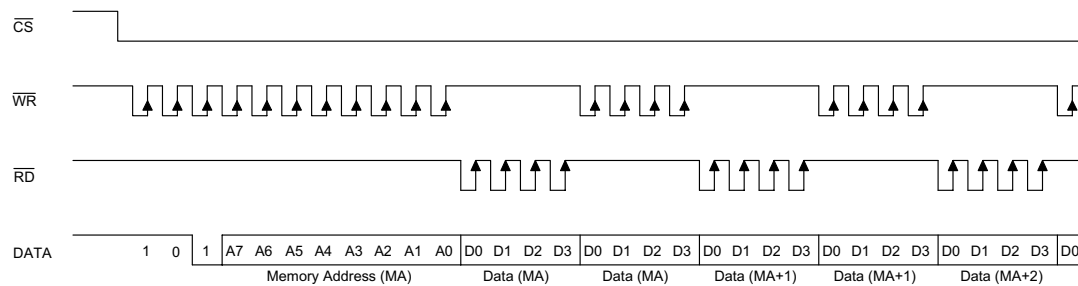


Command mode (command code : 1 0 0)

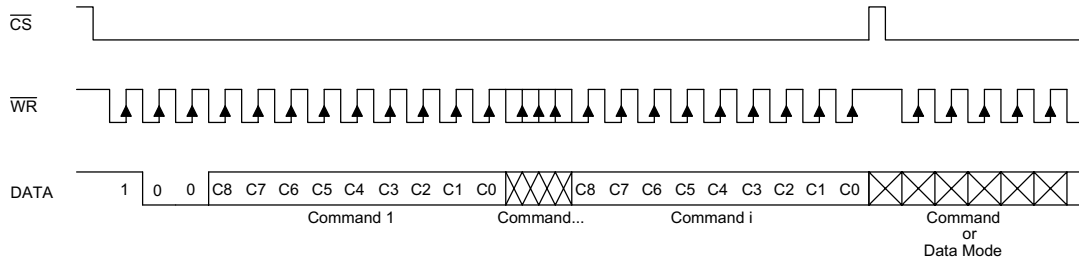

Mode (data and command mode)

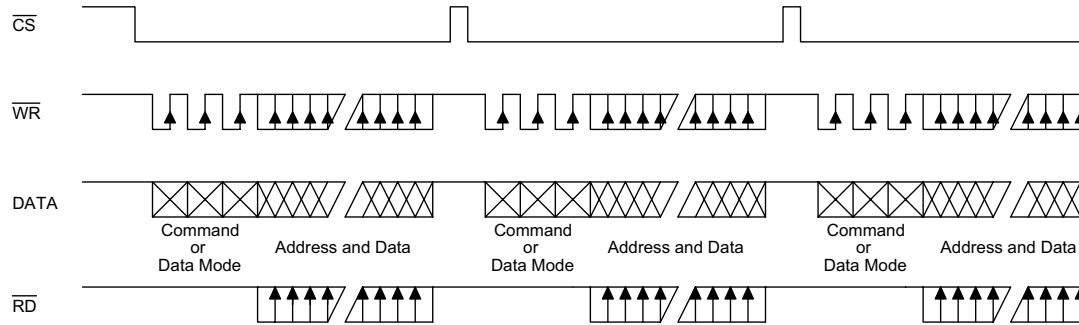

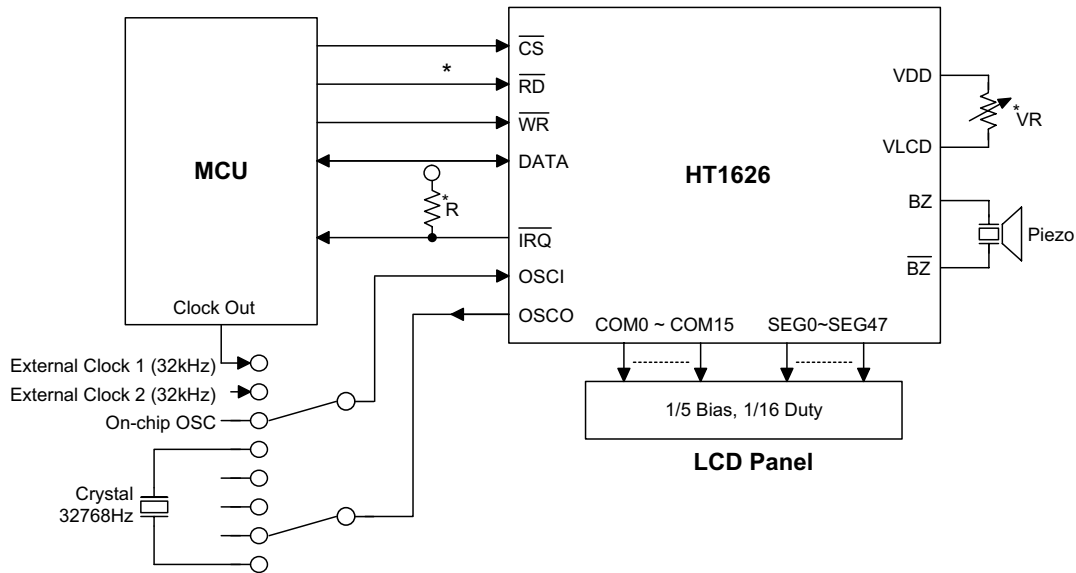Application Circuits


Note: The connection of $\overline{\text{IRQ}}$ and $\overline{\text{RD}}$ pin can be selected depending on the requirement of the MCU.
 The voltage applied to V_{LCD} pin must be lower than V_{DD} .
 Adjust VR to fit LCD display, at $V_{\text{DD}}=5\text{V}$, $V_{\text{LCD}}=4\text{V}$, $\text{VR}=15\text{k}\Omega\pm 20\%$.
 Adjust R (external pull-high resistance) to fit user's time base clock.

Instruction Set Summary

| Name | ID | Command Code | D/C | Function | Def. |
|-------------------|-------|--------------------------|-----|--|------|
| READ | 1 1 0 | A7A6A5A4A3A2A1A0D0D1D2D3 | D | Read data from the RAM | |
| WRITE | 1 0 1 | A7A6A5A4A3A2A1A0D0D1D2D3 | D | Write data to the RAM | |
| READ-MODIFY-WRITE | 1 0 1 | A7A6A5A4A3A2A1A0D0D1D2D3 | D | Read and Write data to the RAM | |
| SYS DIS | 1 0 0 | 0000-0000-X | C | Turn off both system oscillator and LCD bias generator | Yes |
| SYS EN | 1 0 0 | 0000-0001-X | C | Turn on system oscillator | |
| LCD OFF | 1 0 0 | 0000-0010-X | C | Turn off LCD display | Yes |
| LCD ON | 1 0 0 | 0000-0011-X | C | Turn on LCD display | |
| TIMER DIS | 1 0 0 | 0000-0100-X | C | Disable time base output | Yes |
| WDT DIS | 1 0 0 | 0000-0101-X | C | Disable WDT time-out flag output | Yes |
| TIMER EN | 1 0 0 | 0000-0110-X | C | Enable time base output | |
| WDT EN | 1 0 0 | 0000-0111-X | C | Enable WDT time-out flag output | |
| TONE OFF | 1 0 0 | 0000-1000-X | C | Turn off tone outputs | Yes |
| CLR TIMER | 1 0 0 | 0000-1101-X | C | Clear the contents of the time base generator | |
| CLR WDT | 1 0 0 | 0000-1111-X | C | Clear the contents of the WDT stage | |
| RC 32K | 1 0 0 | 0001-10XX-X | C | System clock source, on-chip RC oscillator | Yes |

| Name | ID | Command Code | D/C | Function | Def. |
|-----------------------------|--------------|--------------|-----|--|------|
| EXT (XTAL) 32K | 1 0 0 | 0001-11XX-X | C | System clock source, external 32kHz clock source or crystal oscillator 32.768kHz | |
| TONE 4K | 1 0 0 | 010X-XXXX-X | C | Tone frequency output: 4kHz | |
| TONE 2K | 1 0 0 | 0110-XXXX-X | C | Tone frequency output: 2kHz | |
| $\overline{\text{IRQ}}$ DIS | 1 0 0 | 100X-0XXX-X | C | Disable $\overline{\text{IRQ}}$ output | Yes |
| $\overline{\text{IRQ}}$ EN | 1 0 0 | 100X-1XXX-X | C | Enable $\overline{\text{IRQ}}$ output | |
| F1 | 1 0 0 | 101X-0000-X | C | Time base clock output: 1Hz The WDT time-out flag after: 4s | |
| F2 | 1 0 0 | 101X-0001-X | C | Time base clock output: 2Hz The WDT time-out flag after: 2s | |
| F4 | 1 0 0 | 101X-0010-X | C | Time base clock output: 4Hz The WDT time-out flag after: 1s | |
| F8 | 1 0 0 | 101X-0011-X | C | Time base clock output: 8Hz The WDT time-out flag after: 1/2s | |
| F16 | 1 0 0 | 101X-0100-X | C | Time base clock output: 16Hz The WDT time-out flag after: 1/4s | |
| F32 | 1 0 0 | 101X-0101-X | C | Time base clock output: 32Hz The WDT time-out flag after: 1/8s | |
| F64 | 1 0 0 | 101X-0110-X | C | Time base clock output: 64Hz The WDT time-out flag after: 1/16s | |
| F128 | 1 0 0 | 101X-0111-X | C | Time base clock output: 128Hz The WDT time-out flag after: 1/32s | Yes |
| TEST | 1 0 0 | 1110-0000-X | C | Test mode, user don't use. | |
| NORMAL | 1 0 0 | 1110-0011-X | C | Normal mode | Yes |

Note: X : Don't care


A7~A0 : RAM address

D3~D0 : RAM data

D/C : Data/Command mode

Def. : Power on reset default

All the bold forms, namely **1 1 0**, **1 0 1**, and **1 0 0**, are mode commands. Of these, **1 0 0** indicates the command mode ID. If successive commands have been issued, the command mode ID except for the first command will be omitted. The source of the tone frequency and of the time base or WDT clock frequency can be derived from an on-chip 32kHz RC oscillator, a 32.768kHz crystal oscillator, or an external 32kHz clock. Calculation of the frequency is based on the system frequency sources as stated above. It is recommended that the host controller should initialize the HT1626 after power on reset, for power on reset may fail, which in turn leads to the malfunctioning of the HT1626.

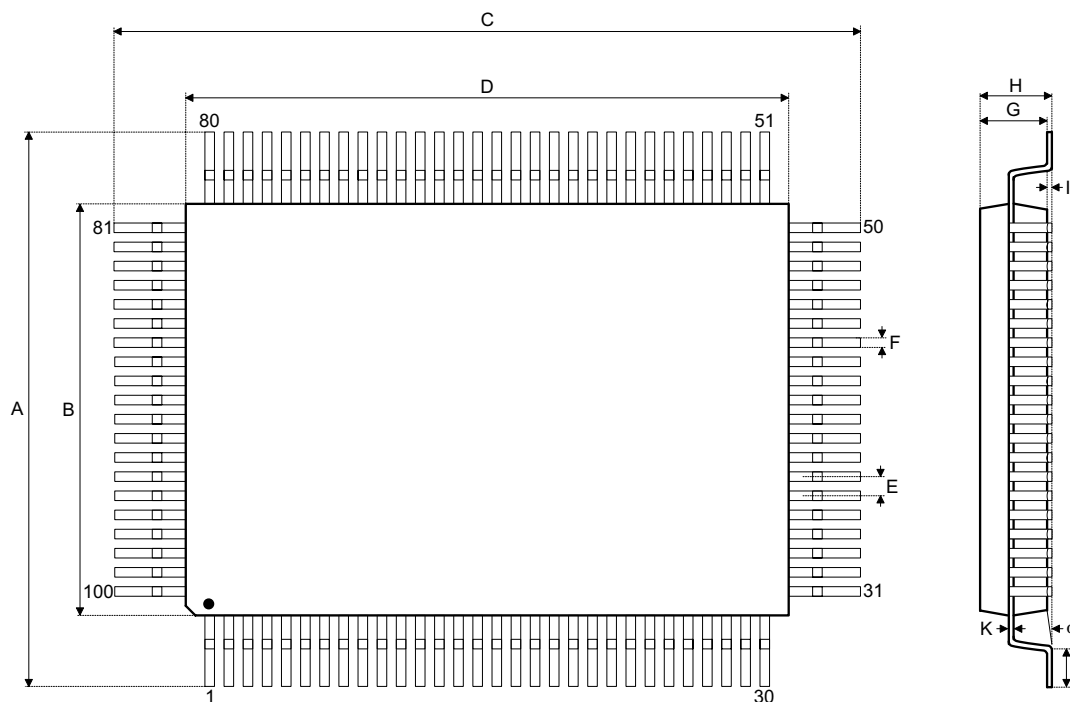Package Information
100-pin QFP (14×20) outline dimensions


| Symbol | Dimensions in mm | | |
|----------|------------------|------|-------|
| | Min. | Nom. | Max. |
| A | 18.80 | — | 19.20 |
| B | 13.90 | — | 14.10 |
| C | 24.80 | — | 25.20 |
| D | 19.90 | — | 20.10 |
| E | — | 0.65 | — |
| F | — | 0.30 | — |
| G | 2.50 | — | 3.10 |
| H | — | — | 3.40 |
| I | — | 0.10 | — |
| J | 1 | — | 1.40 |
| K | 0.10 | — | 0.20 |
| α | 0° | — | 7° |

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
<http://www.holtek.com.tw>

Holtek Semiconductor Inc. (Sales Office)

11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan
Tel: 886-2-2782-9635
Fax: 886-2-2782-9636
Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Shanghai) Inc.

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China
Tel: 021-6485-5560
Fax: 021-6485-0313
<http://www.holtek.com.cn>

Holtek Semiconductor (Hong Kong) Ltd.

RM.711, Tower 2, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Rd., Kowloon, Hong Kong
Tel: 852-2-745-8288
Fax: 852-2-742-8657

Holmate Semiconductor, Inc.

48531 Warm Springs Boulevard, Suite 413, Fremont, CA 94539
Tel: 510-252-9880
Fax: 510-252-9885
<http://www.holmate.com>

Copyright © 2002 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.