


FIG.2
CABLE STRIPPING DIMENSIONS
PER CONFIGURATIONS
(SEE TABLE 1)(SEE NOTES 12,13,14,15)

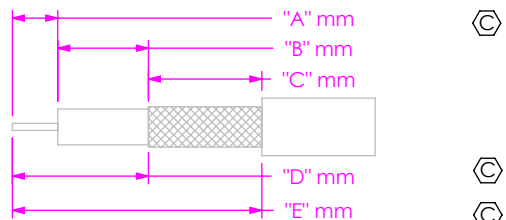

**DESIGNED & DIMENSIONED
IN MILLIMETERS(INCHES)**

MHXXX-MHXP-XXXXXX-XXXX

CABLE CALLOUT

- 081: CCA-081
(0.81 OD MINIATURE COAX CABLE)
- 113: CCA-113
(1.13 OD MINIATURE COAX CABLE)

END 1 CONNECTOR

- MH1RP: MHF-P-C-RA-CAX (SEE SHEET 2)
(081 CABLE TYPE: MHF1-P-C-RA-CA3)
(113 CABLE TYPE: MHF1-P-C-RA-CA4)
- MH3RP: MHF-P-C-RA-CA4 (SEE SHEET 2)
(081 CABLE TYPE ONLY)

OVERALL CABLE LENGTH
MILLIMETERS OF CABLE
0100 MIN. (SEE NOTE 8 & 9)

END 2 CONNECTOR OR PREPARATION

- MH1RP: MHF-P-C-RA-CAX (SEE SHEET 2)
(081 CABLE TYPE: MHF1-P-C-RA-CA3)
(113 CABLE TYPE: MHF1-P-C-RA-CA4)
- MH3RP: MHF-P-C-RA-CA3 (SEE SHEET 2)
(081 CABLE TYPE ONLY)
- 01BJ1: SMA-J-C-X-ST-BHX (SEE SHEET 2)
(081 CABLE TYPE: SMA-J-C-X-ST-BH3)
(113 CABLE TYPE: SMA-J-C-X-ST-BH4)
- 01BJ2: SMA-J-C-X-ST-BRX (SEE SHEET 2)
(081 CABLE TYPE: SMA-J-C-X-ST-BR3)
(113 CABLE TYPE: SMA-J-C-X-ST-BR4)
- 01SB1: SMA-J-C-X-ST-SBX (SEE SHEET 2)
(081 CABLE TYPE: SMA-J-C-X-ST-SB3)
(113 CABLE TYPE: SMA-J-C-X-ST-SB4)
- 01SR1: SMA-J-C-X-ST-SRX (SEE SHEET 2)
(081 CABLE TYPE: SMA-J-C-X-ST-SR3)
(113 CABLE TYPE: SMA-J-C-X-ST-SR4)
- SING: SINGLE ENDED (ONE END ONLY, SEE NOTE 11)
- XXXXXX: STRIPPED AND TINNED (THIS END ONLY-
SEE NOTES 11-15 & SHEET 2, FIG. 3)

(SEE FIG. 2) "C" FORMAT: X.Xmm
(SEE FIG. 2) "B" FORMAT: X.Xmm
(SEE FIG. 2) "A" FORMAT: X.Xmm

DO NOT LEAVE ANY SPACE BLANK,
EACH MUST CONTAIN A
NUMERIC CHARACTER 0 THRU 9.

TABLE 1					
CABLE STRIPPING DIMENSIONS				CABLE CUT LENGTH	HI POT
STYLE	"A"	"D"	"E"	SUBTRACTOR	DCV
-MH1RP	1.2 [0.05]	2.4 [0.09]	3.3 [0.13]	2.0 [0.08]	200
-MH3RP	1.0 [0.04]	1.4 [0.06]	2.4 [0.09]	0.8 [0.03]	200
-01BJ1	2.5 [0.10]	3.1 [0.12]	11.5 [0.45]	9.5 [0.37]	200
-01BJ2	2.5 [0.10]	3.1 [0.12]	11.5 [0.45]	9.5 [0.37]	200
-01SB1	2.5 [0.10]	3.1 [0.12]	11.5 [0.45]	9.5 [0.37]	200
-01SR1	2.5 [0.10]	3.1 [0.12]	11.5 [0.45]	9.5 [0.37]	200
-SING	-	-	-	0.0 [0.00]	200

TABLE 2: FINAL ASSEMBLY LENGTH TOLERANCE	
LENGTH	TOLERANCE
0100-0200 [3.92-7.87]	+3.0 [.12]/-0.0 [.00]
0200-0500 [7.87-19.69]	+5.0 [.20]/-0.0 [.00]
0500-1100 [19.69-43.30]	+10.0 [.40]/-0.0 [.00]
>1100 [43.30]	± 1%

DO NOT
SCALE FROM
THIS PRINT

NOTES:

1. REPRESENTS A CRITICAL DIMENSION.
2. CABLE CUT LENGTH:
= (LENGTH: XXXX) - (SUBTRACTOR FOR END 1) - (SUBTRACTOR FOR END 2).
(SEE TABLE 1 FOR SUBTRACTORS)
3. ASSEMBLY TO BE 100% TESTED FOR OPENS & SHORTS.
4. ASSEMBLY TO BE 100% HI-POT TESTED PER TABLE 1.
5. AFTER FINAL ELECTRICAL TESTS, LABEL EACH CABLE ASSEMBLY WITH 1 LABEL -ET
6. CRITICALS ON CONNECTOR PRINTS TO BE CHECKED IN PROCESS.
7. FINISHED ASSEMBLIES TO BE PACKAGED PER PACKAGING STANDARD CO-HD-WI-3033-M.
-LOCKWASHERS, NUTS, AND GASKETS TO BE SHIPPED UNASSEMBLED.
8. CABLE STOCKED IN INCHES, 1 INCH = 25.4 MILLIMETERS.
9. CABLE LENGTHS LONGER THAN 1000 MILLIMETERS ARE NOT SUPPORTED BY S.I. TEST DATA.
10. MINIMUM BEND RADIUS FOR MH081 = 5.0 [.20]
MH113 = 6.8 [.27]
11. FOR SING ENDED OR STRIPPED AND TINNED ASSEMBLIES: MAKE A DOUBLE ENDED
ASSEMBLY AT TWICE THE CABLE LENGTH AND TEST BEFORE CUTTING ASSEMBLY IN HALF.
12. DIM "A", "B", AND "C" HAVE A MINIMUM VALUE OF 0.0mm & A MAXIMUM VALUE OF 9.9mm.
13. PRODUCTION OF STRIP AND TIN FOR CENTER DIELECTIC USE: A.
14. PRODUCTION OF STRIP AND TIN FOR SHIELD USE: D=A+B.
15. PRODUCTION OF STRIP AND TIN FOR JACKET USE: E=A+B+C.
16. FOR -RA TO -RA, CONNECTORS SHOULD BOTH BE ORIENTED UP. (SEE SHEET 2, FIG. 4)

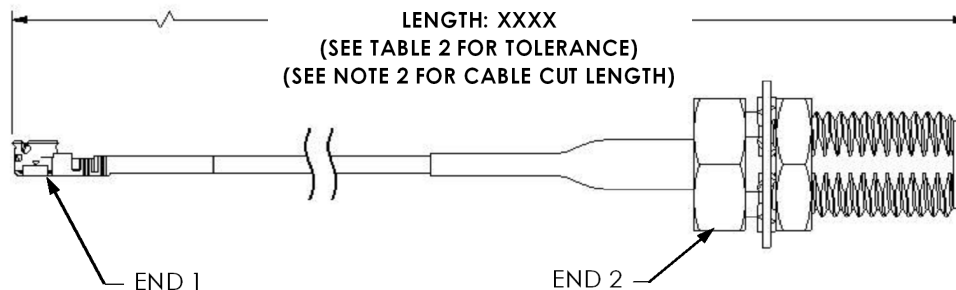


FIG. 1
MHXXX-MH1RP-01BJT-XXXX SHOWN

THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING

F:\DWG\MISC\Mktg\MHXXX-MHXP-XXXXXX-XXXX-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN
MILLIMETERS (INCHES).
TOLERANCES ARE:
DECIMALS ANGLES
.X: ±0.3 [.01] 2°
.XX: ±0.13 [.005]
.XXX: ±0.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
SEE END 1 AND END 2 ASSEMBLY PRINTS

SHEET SCALE: 2:1

DESCRIPTION:
MICRO RF CABLE ASSEMBLY

DWG. NO.
MHXXX-MHXP-XXXXXX-XXXX

BY: CUMMINGS 07/26/2005 SHEET 1 OF 2




520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

-MH1RP

(RIGHT ANGLE PLUG)

(081 CABLE TYPE USE DRAWING No. MHF1-P-C-RA-CA3 FOR ASSEMBLY INSTRUCTIONS)

(113 CABLE TYPE USE DRAWING No. MHF1-P-C-RA-CA4 FOR ASSEMBLY INSTRUCTIONS)



PLATING

10μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: MHF1-P-C-RA-CA3)
 OR (END CONNECTOR P/N: MHF1-P-C-RA-CA4)


NOTE: ALL CRITICAL DIMENSIONS ON MHF1-P-C-RA-CA3 THAT APPLY MUST BE VERIFIED.

-01BJ1

(STRAIGHT BULKHEAD JACK)

(081 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-BH3 FOR ASSEMBLY INSTRUCTIONS)

(113 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-BH4 FOR ASSEMBLY INSTRUCTIONS)

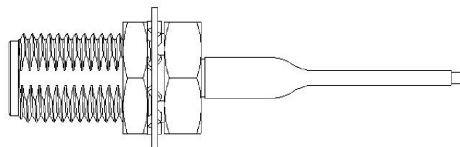

PLATING

30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: SMA-J-C-H-ST-BH3)
 OR (END CONNECTOR P/N: SMA-J-C-H-ST-BH4)


NOTE: ALL CRITICAL DIMENSIONS ON SMA-J-C-X-ST-BH3 OR SMA-J-C-X-ST-BH4 THAT APPLY MUST BE VERIFIED.

-01SB1

(SEALED STRAIGHT BULKHEAD JACK)

(081 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-SB3 FOR ASSEMBLY INSTRUCTIONS)

(113 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-SB4 FOR ASSEMBLY INSTRUCTIONS)

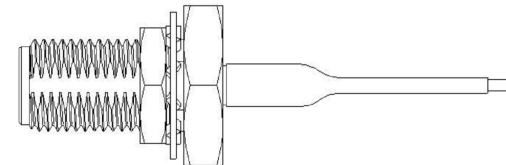

PLATING


30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: SMA-J-C-H-ST-SB3)
 OR (END CONNECTOR P/N: SMA-J-C-H-ST-SB4)

NOTE: ALL CRITICAL DIMENSIONS ON SMA-J-C-X-ST-SB3 OR SMA-J-C-X-ST-SB4 THAT APPLY MUST BE VERIFIED.

-MH3RP

(RIGHT ANGLE PLUG)

(081 CABLE TYPE USE DRAWING No. MHF3-P-C-RA-CA3 FOR ASSEMBLY INSTRUCTIONS)



PLATING

10μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: MHF3-P-C-RA-CA3)


NOTE: ALL CRITICAL DIMENSIONS ON MHF3-P-C-RA-CA3 THAT APPLY MUST BE VERIFIED.

-01BJ2 (REVERSED POLARITY)

(STRAIGHT BULKHEAD JACK)

(081 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-BR3 FOR ASSEMBLY INSTRUCTIONS)

(113 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-BR4 FOR ASSEMBLY INSTRUCTIONS)

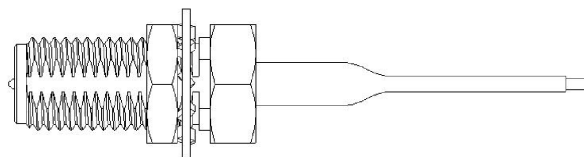

PLATING

30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: SMA-J-C-H-ST-BR3)
 OR (END CONNECTOR P/N: SMA-J-C-H-ST-BR4)


NOTE: ALL CRITICAL DIMENSIONS ON SMA-J-C-X-ST-BR3 OR SMA-J-C-X-ST-BR4 THAT APPLY MUST BE VERIFIED.

-01SR1 (REVERSED POLARITY)

(SEALED STRAIGHT BULKHEAD JACK)

(081 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-SR3 FOR ASSEMBLY INSTRUCTIONS)

(113 CABLE TYPE USE DRAWING No. SMA-J-C-X-ST-SR4 FOR ASSEMBLY INSTRUCTIONS)

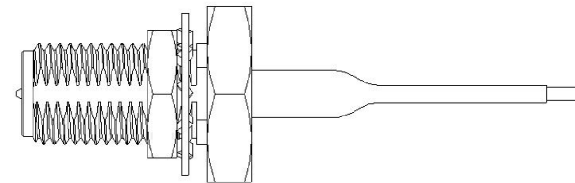

PLATING

30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: SMA-J-C-H-ST-SR3)
 OR (END CONNECTOR P/N: SMA-J-C-H-ST-SR4)

NOTE: ALL CRITICAL DIMENSIONS ON SMA-J-C-X-ST-SR3 OR SMA-J-C-X-ST-SR4 THAT APPLY MUST BE VERIFIED.

FIG. 3

MHXXX-MH1RP-T02148-XXXX SHOWN






FIG. 4

MH081-MH3RP-MH1RP-XXXX SHOWN
 (SEE NOTE 16)

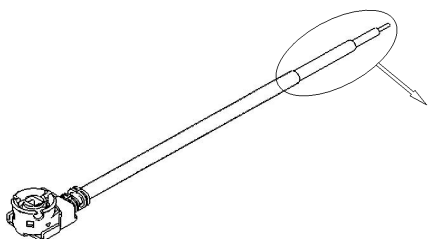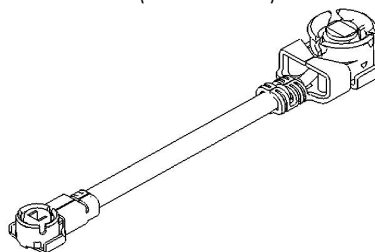

F:\DWG\MISC\Mktg\MHXXX-MH1RP-XXXX-XXXX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:

MICRO RF CABLE ASSEMBLY

DWG. NO.

MHXXX-MH1RP-XXXXXX-XXXX

BY: CUMMINGS

07/26/2005

SHEET 2 OF 2