

FILE NO.

SERVICE MANUAL**Remote Control Digital
Color Television****DP15657 (U.S.A.)
(CANADA)****ORIGINAL VERSION****Chassis No. P15657-00**

NOTE: Match the Chassis No. on the unit's back cover with the Chassis No. in the Service Manual.

If the Original Version Service Manual Chassis No. does not match the unit's, additional Service Literature is required. You must refer to "Notices" to the Original Service Manual prior to servicing the unit.

Servicing should be performed by only trained and qualified service personnel.**Contents**

Safety Instructions	2
Service Adjustments.....	3 - 4
Power Failure Circuit	5
Mechanical Disassemblies.....	6 - 9
Chassis Electrical Parts List	10 - 24
Cabinet Parts List	25
Component and Test Point Locations	26 - 27
Block Diagrams	28 - 35
Troubleshooting Flow Charts	36 - 38
Control Port Functions.....	39 - 40
Schematic Notes	41
Pin Layouts.....	42
PC Board Connections and Locations ..	43
Capacitor and Resistor Codes	44
Schematic Diagrams	45 - 46

Specifications

Power Rating	120VAC
	40W (Avg), 0.8A (Max)
Antenna Input Impedance	75Ω
	UHF/VHF/CATV
Receiving Channel	2 - 13 (VHF), 14 - 69 (UHF), 01, 14-94, 95-125 (CATV) 1 - 135 (Digital)
Remote Ready	32 Key Remote Control
Sound Output	2.0 W/CH
Intermediate Frequency	
Picture IF Carrier.....	45.75MHz
Sound IF Carrier	41.25MHz
Color Sub Carrier	42.17MHz
LCD	T150XG01 V4
Cabinet Dimensions	
Width.....	484mm
Height	311mm
Depth including base.....	154mm

SAFETY INSTRUCTIONS

SAFETY PRECAUTIONS

WARNING: The chassis of this receiver has a floating ground with the potential of one half the AC line voltage in respect to earth ground. Service should not be attempted by anyone not familiar with the precautions necessary when working on this type of equipment.

The following precautions must be observed:

1. An isolation transformer must be connected in the power line between the receiver and the AC line before any service is performed on the receiver.
2. Comply with all caution and safety-related notes provided on the side of the cabinet, inside the cabinet, and on the chassis.
3. When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as control knobs, adjustment covers, shields and barriers.
4. Before replacing the back cover of the set, thoroughly inspect the inside of the cabinet to see that no stray parts or tools have been left inside.


Before returning any television to the customer, the service technician must perform the following safety checks to be sure that the unit is completely safe to operate without danger of electrical shock.

ANTENNA COLD CHECK

Remove AC plug from the 120 VAC outlet and place a jumper across the two blades. Connect one lead of an ohmmeter to the jumpered AC plug, and touch the other lead to the exposed antenna terminal. The resistance must measure between 1M ohm and 5.2M ohm. Any resistance value below or above this range indicates an abnormality which requires corrective action.

LEAKAGE CURRENT CHECK

Plug the AC line cord directly into a 120 VAC outlet. (Do not use an isolation transformer for this check.) Use an AC voltmeter, that has 5000 ohms per volt or more sensitivity. Connect a 1500 ohm 10 watt resistor, paralleled by a 0.15 μ F 150 VAC capacitor, between a known good earth ground (water pipe, conduit, etc.) and all exposed metal parts of the cabinet (antennas, handle bracket, metal cabinet, screw heads, metal overlays, control shafts, etc.). Measure the AC voltage across the 1500 ohm resistor. The AC voltage should not exceed 750 mV. A reading exceeding 750 mV indicates that a dangerous potential exists. The fault must be located and corrected. Repeat the above test with the receiver power plug reversed. NEVER RETURN A RECEIVER TO THE CUSTOMER WITHOUT TAKING THE NECESSARY CORRECTIVE ACTION.

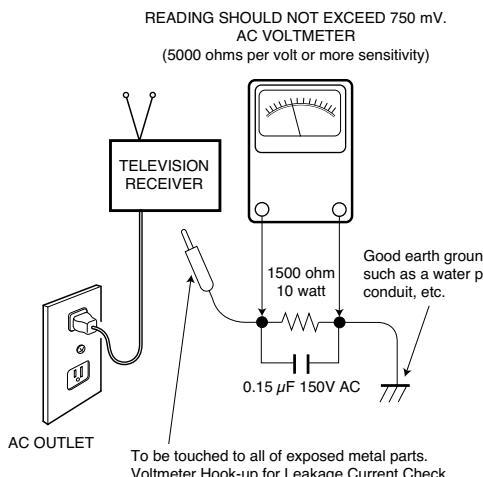

PRODUCT SAFETY NOTICE

When replacing components in a receiver, always keep in mind the necessary product safety precautions. Pay special attention to the replacement of components marked with a \triangle in the parts list and in the schematic diagrams. To ensure safe product operation, it is necessary to replace those components with the exact same PARTS.

SERVICING ELECTROSTATICALLY SENSITIVE DEVICES

Semiconductors (solid-state devices) that can be damaged by static electricity are referred to as Electrostatically Sensitive (ES) devices. Examples of typical ES devices are: Integrated Circuits (IC), Field-Effect Transistors (FET), and "chip" components. The following techniques should be observed strictly, to reduce the occurrence of semiconductor damage due to electrostatic discharge.

1. Immediately prior to handling any semiconductor component or an assembly containing a semiconductor device or devices, discharge the electrostatic buildup on your body by touching a known earth ground. You may also obtain and wear a commercially available discharging wrist strap device.
CAUTION: Be sure to remove the wrist strap before applying power to any unit being serviced.
2. After removing an ES equipped assembly, place it on a conductive surface, such as, aluminum foil, to prevent buildup or exposure to static electricity.
3. Use only grounded-tip soldering irons to solder or unsolder ES devices.
4. Use only anti-static solder removal devices. Some suction-type devices can generate static electricity adequate to damage ES devices.
5. A replacement ES device will come packaged in protective material (conductive foam, aluminum foil, or some comparable conductive material). Do Not remove an ES device from its protective packaging unless you are prepared to install it immediately.
6. Precisely prior to removing an ES device from its protective packaging, touch the protective packaging to the chassis or assembly in which the device will be installed.
CAUTION: Be sure that no power is applied to the chassis or circuit assembly.
7. Incidental body movements, such as, lifting a foot from a carpeted floor or the rubbing of fabric together can generate static electricity sufficient to damage ES devices. Therefore, minimize all body movements while handling exposed (unpackaged) ES devices.

SERVICE ADJUSTMENTS

GENERAL

This set has an On-screen Service Menu system included in the CPU that allows remote operation for most of the service adjustments.

ON-SCREEN SERVICE MENU SYSTEM

1. Enter the Service Menu:

- Turn off the receiver and disconnect the AC power supply.
- While pressing the Volume (-) button on the television, reconnect the AC power supply. The Service Menu will now appear. The remote can now be used to make adjustments. See Figure 1 below.



Figure 1. Service Menu Display


2. Service Adjustments:

- Press the **Channel ▲** or **▼** key to select the desired service menu item you want to adjust. See page 4 for the On-screen Service Menu.
- Use the **Volume +** or **-** key to adjust the data. The + or - keys will increase or decrease the data sequentially.

3. Exit from the Service Menu:

- Press the **MENU** key to turn off the Service Menu display.


Volume - : Enter Service Menu

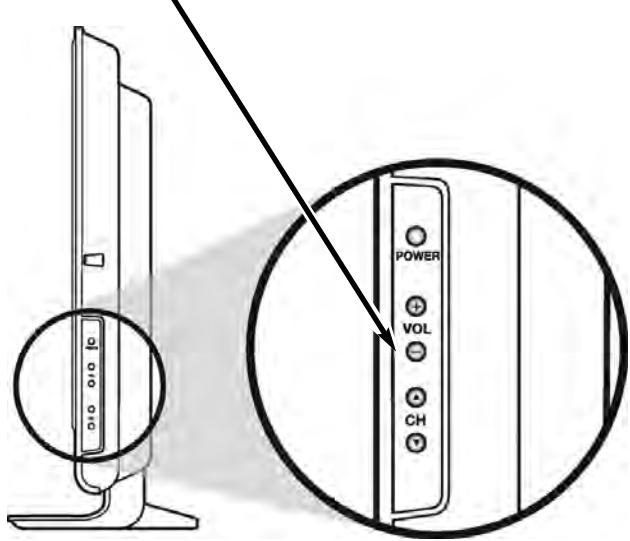

Volume + / -: Adjust Service Menu

Channel ▼ ▲: Select Item

Menu: Exit Service Menu

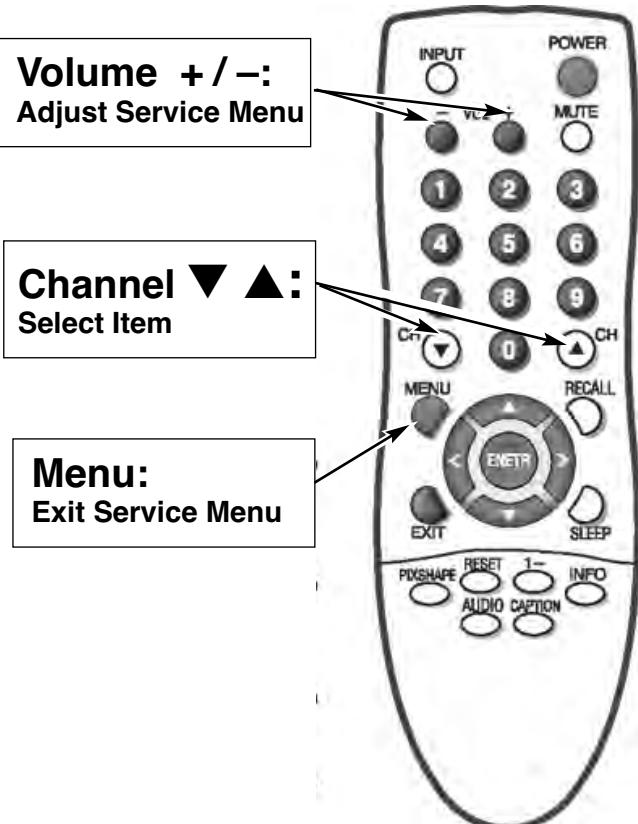

ON-SCREEN SERVICE MENU

Table 1. ON-SCREEN SERVICE MENU

When IC802 (EEPROM) is replaced, check the bus data to confirm they are the same as below. See page 3 for On-Screen Service Menu access and adjustments.

No.	Title	Initial Data	Note
086	VOL	30h	Volume setup inspection
087	OP1	00h	Option 1 Data
088	OP2	01h	Option 2 Data
101	1R00	00h	ROM Correction Data
102	1R02	00h	ROM Correction Data
↓	↓	↓	↓
197	2R47	00h	ROM Correction Data
198	2R48	00h	ROM Correction Data

PROGRAM CODES

The microprocessor used in this model is a multi-purpose type and is used in several different models. To ensure proper operation and the correct features for your particular model, the program codes must be correct.

Note 1. Option Data 1 (NO. 087 OPT) should be hexadecimal 00. See 087 above. If this program code is wrong the TV will not operate properly.

Note 2. Option Data 2 (NO. 088 OP2) should be hexadecimal 01. See 088 above. If this program code is wrong the TV will not operate properly.

POWER FAILURE CIRCUIT

This unit is equipped with a Power Failure Detector function included in the CPU which checks for an abnormal condition in the chassis power supplies, including the power supply for the LVDS (LCD Panel).

If, while the power is on, a failure is caused by any of the following that results in a low voltage supply, the CPU will turn the unit off in 1.5 seconds to prevent further damage:

- Failure within the power supply circuits.
- A short circuit in the load side from the supply.

1. **Power Failure 1:** Detected voltage failure for digital circuits. (Connected to IC801 pin 36.)

2. **Power Failure 2:** Detected voltage failure for analog circuits. (Connected to IC801 pin 32.)


(Normal: High; Failure: Low)

If, while the power is off, the power is switched on and any of these failures remains uncorrected, the CPU will shut off the power within three seconds.

Check the following if the unit is turned off by the power failure detector.

1. Disconnect the AC power cord (120V AC line) for at least 10 seconds.
2. Connect a DC Voltmeter to the circuits shown below.
3. Press the Power key and check for the proper voltage supplies.
4. If any of these voltages is low, the power failure detector should turn the unit off within three seconds.
5. Check all circuits shown below.

Note: This unit is equipped with a Power Surge Protection feature included in the CPU. If power failure occurs three times within 15 minutes, the CPU will stop functioning automatically to help prevent secondary damage. (TV will not turn on by pressing the power key.) To reset the operating programs within the CPU, disconnect the AC power cord for at least 10 seconds.

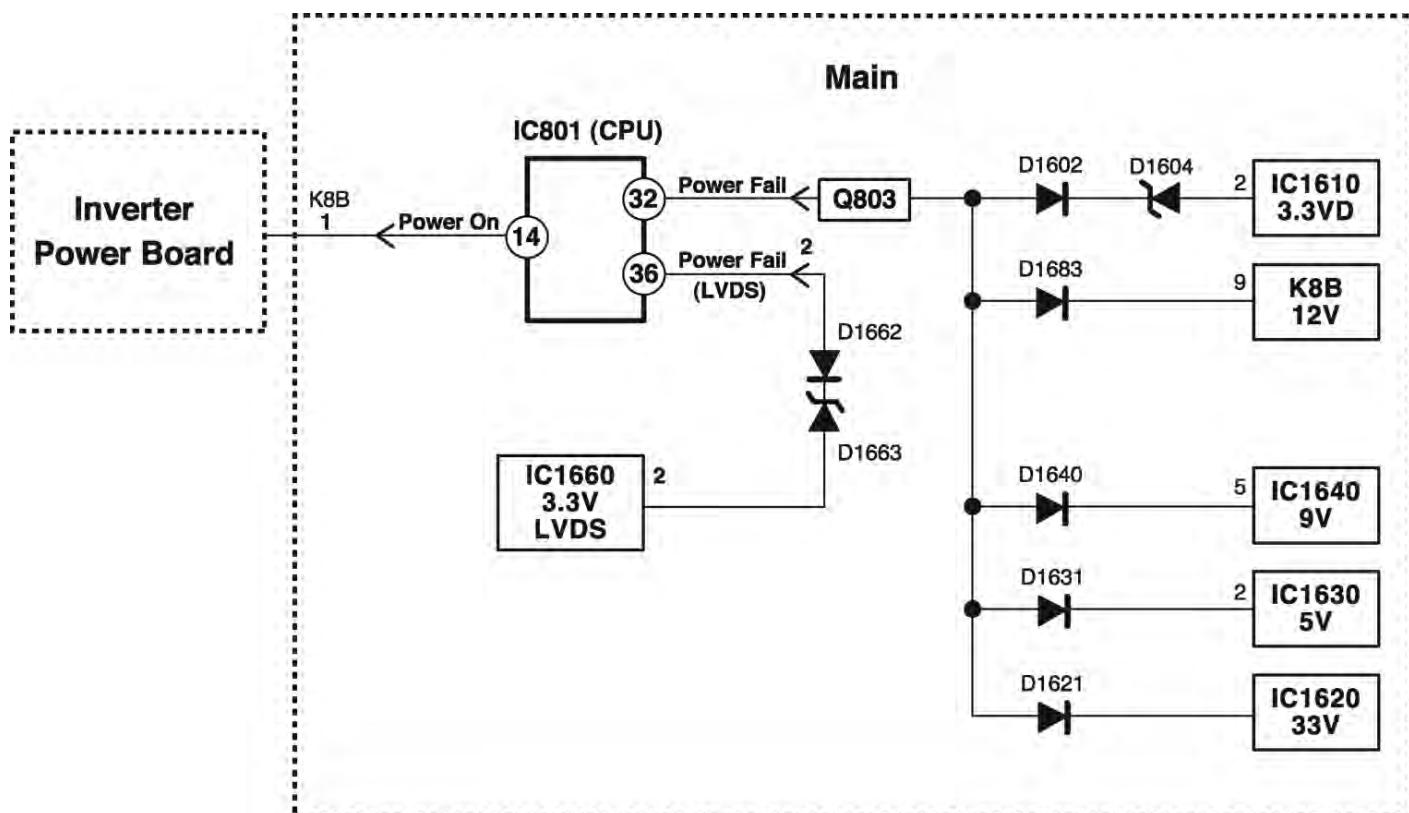


MECHANICAL DISASSEMBLY

CAUTION: This LCD TV uses several different kinds of screws. Using the correct screw is necessary to prevent damage. Lead wires must be redressed to their previous locations after servicing.

STAND REMOVAL

Note: Position TV face down on a padded or cushioned surface to protect the screen and finish.

Remove 2 screws to take the stand off.

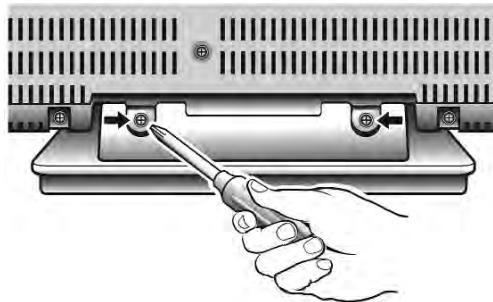


CABINET BACK REMOVAL

Remove 6 screws (A 3X10) and 1 screw (B 3X6).

Release the hooks in 2 places at the top by grasping the bottom of the back and lifting. Take the cabinet back off.

Note: The cabinet back can be removed without removing the stand.

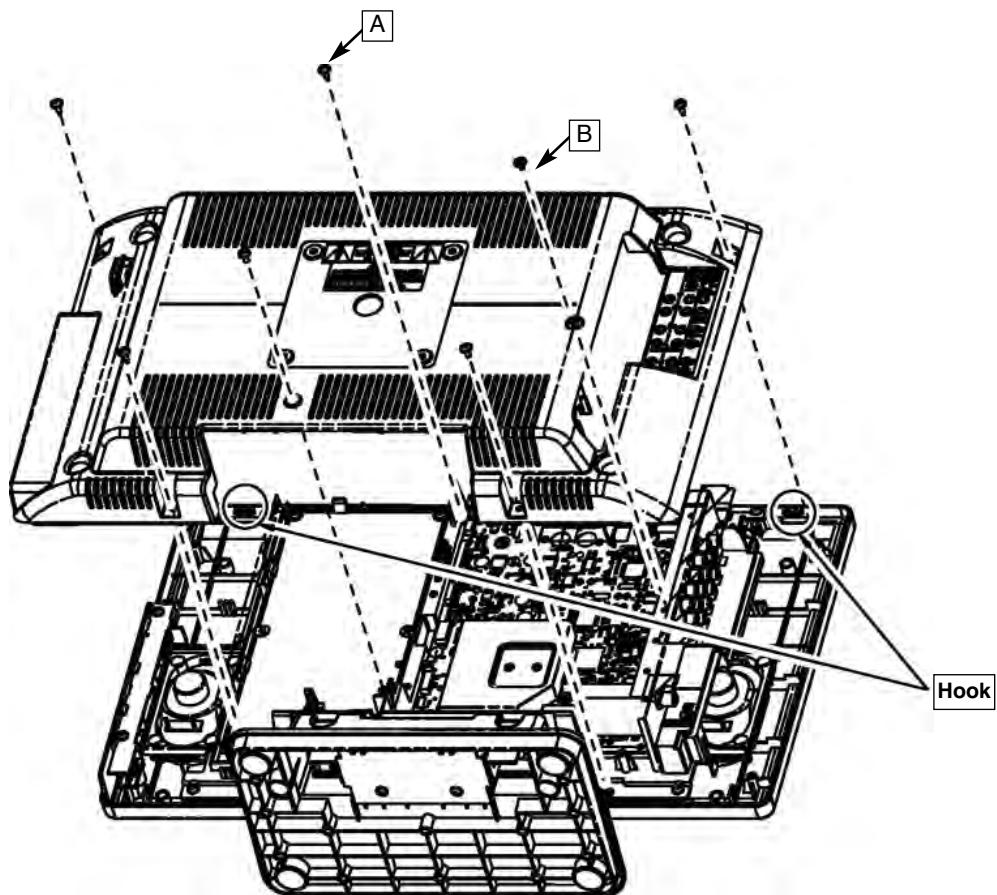




ELECTROSTATICALLY SENSITIVE DEVICES

Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.


POWER BOARD REMOVAL

Remove 2 screws to take off the power unit.

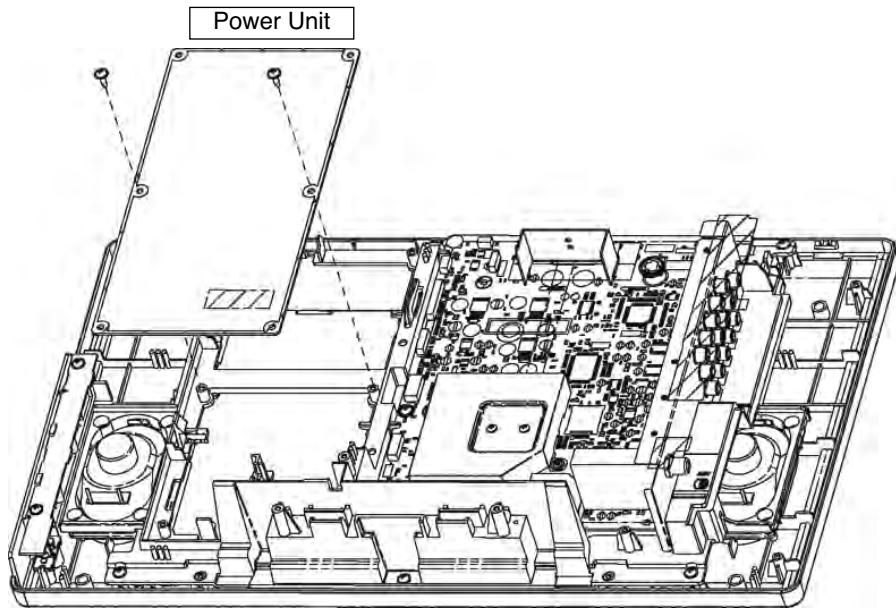

MAIN BOARD REMOVAL


Remove 3 screws to take off the main board.

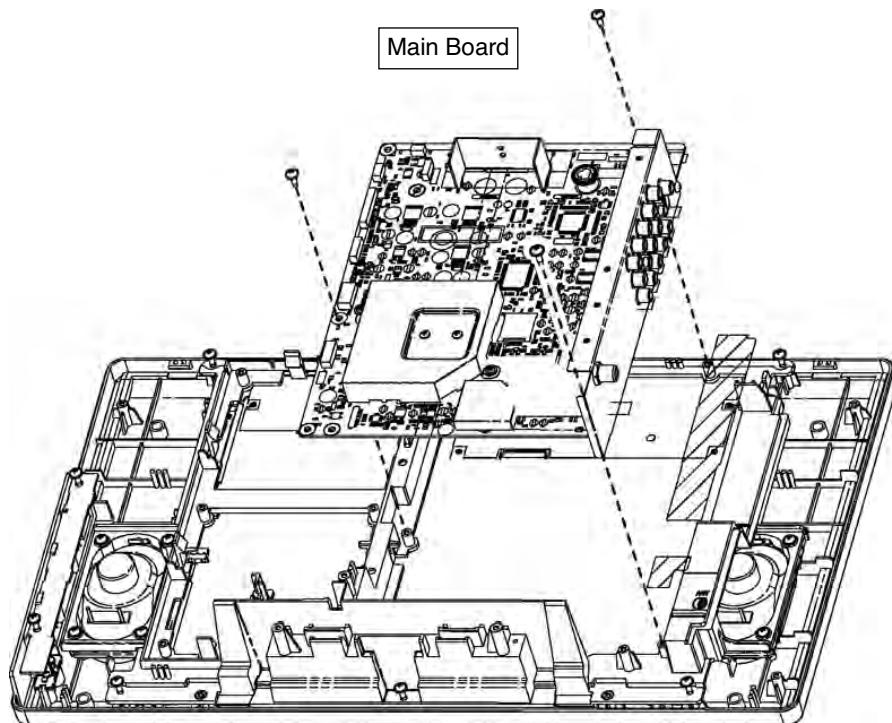

MECHANICAL DISASSEMBLY (CONT.)


MOUNTING BRACKET AND SPEAKER REMOVAL

Remove 11 screws to take off the mounting bracket and the right speaker.

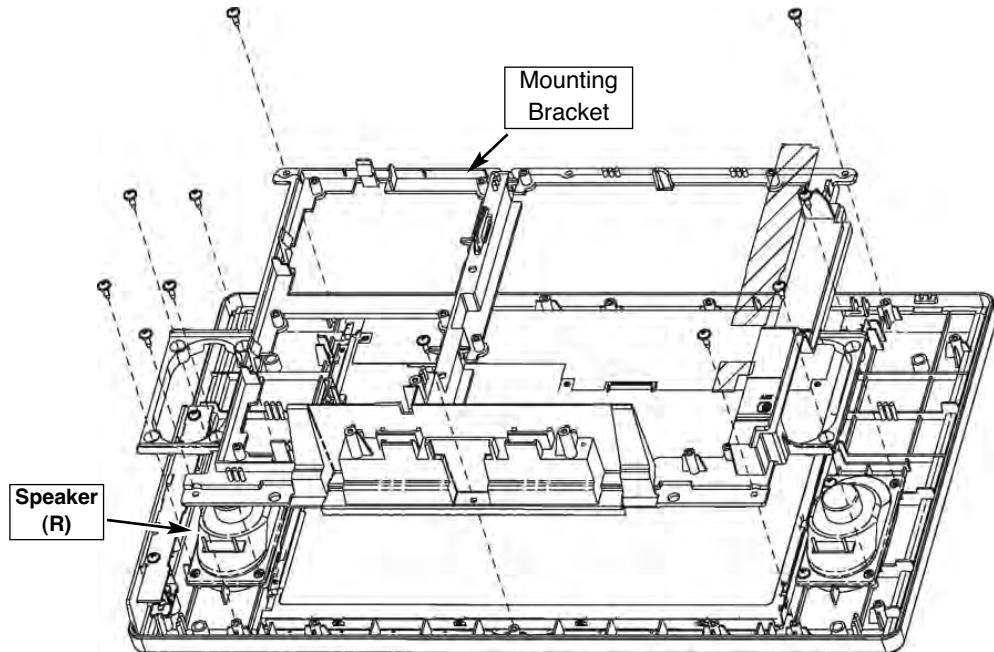


LEFT SPEAKER REMOVAL

Remove 2 screws and remove the left speaker.

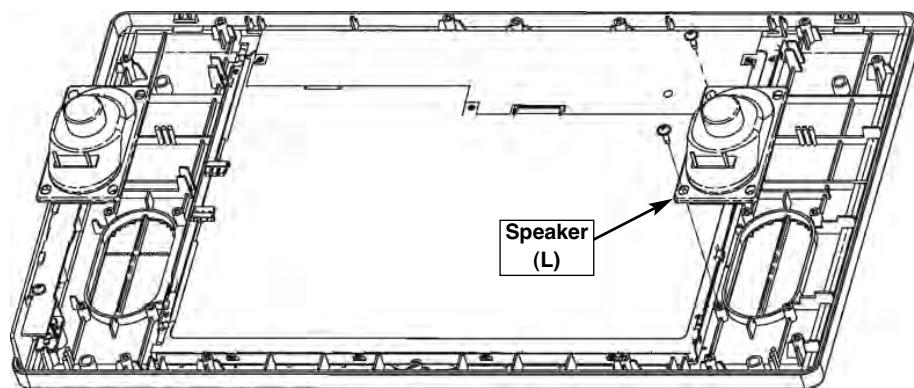


LCD PANEL REMOVAL

Lift panel from cabinet.

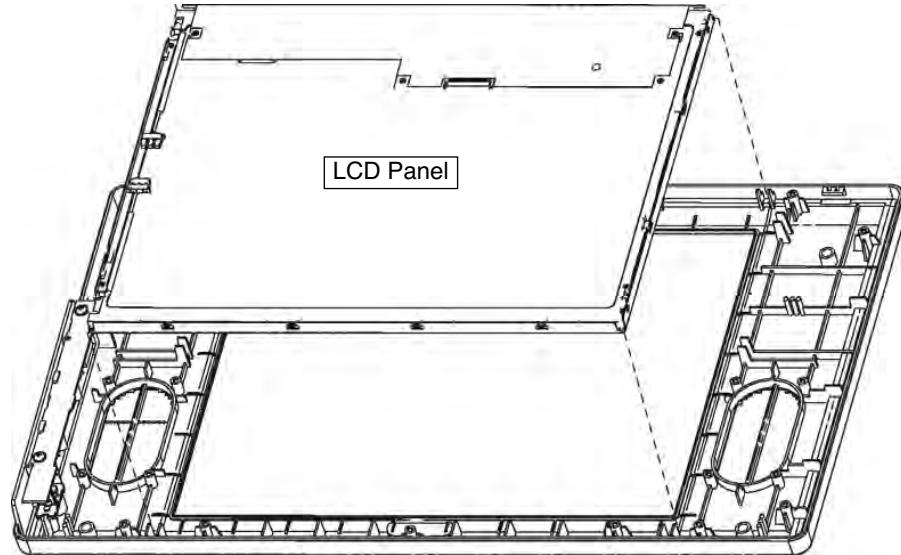

CONTROL BOARD REMOVAL

Remove 2 screws to take off the control board with the button assembly parts.

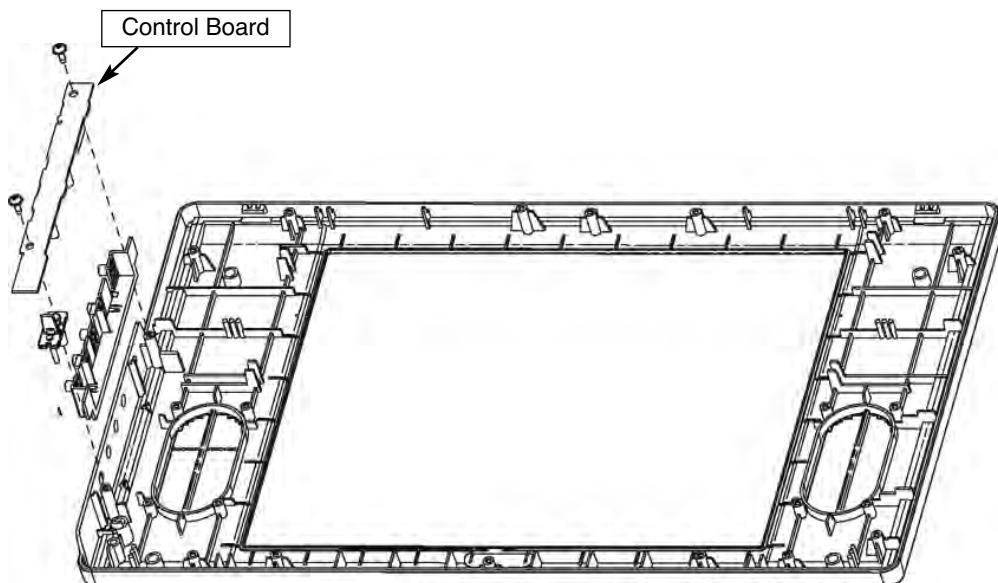

CHASSIS ELECTRICAL PARTS LIST

CAUTION: To Protect against electrical shock and for continued product safety, refer to SAFETY PRECAUTIONS and PRODUCT SAFETY NOTICE on Page 2.

PRODUCT SAFETY NOTICE

PRODUCT SAFETY SHOULD BE CONSIDERED WHEN A REPLACEMENT IS MADE IN ANY AREA OF A RECEIVER. COMPONENTS INDICATED BY A  IN THIS PARTS LIST AND THE SCHEMATIC DIAGRAM DESIGNATE COMPONENTS IN WHICH SAFETY CAN BE OF SPECIAL SIGNIFICANCE. IT IS PARTICULARLY RECOMMENDED THAT ONLY PARTS DESIGNATED ON THE FOLLOWING PARTS LIST BE USED FOR COMPONENT REPLACEMENT DESIGNATED BY A . NO DEVIATIONS FROM RESISTANCE, WATTAGE, AND VOLTAGE RATINGS MAY BE MADE FOR REPLACEMENT ITEMS DESIGNATED BY A .

Note: Schematic part location numbers may not always match with the part descriptions.
The part descriptions are correct and should be used.


Schematic Location	Part No.	Description
--------------------	----------	-------------

CAPACITORS

NOTES:

Read description of the Capacitor as follows:

(Example)

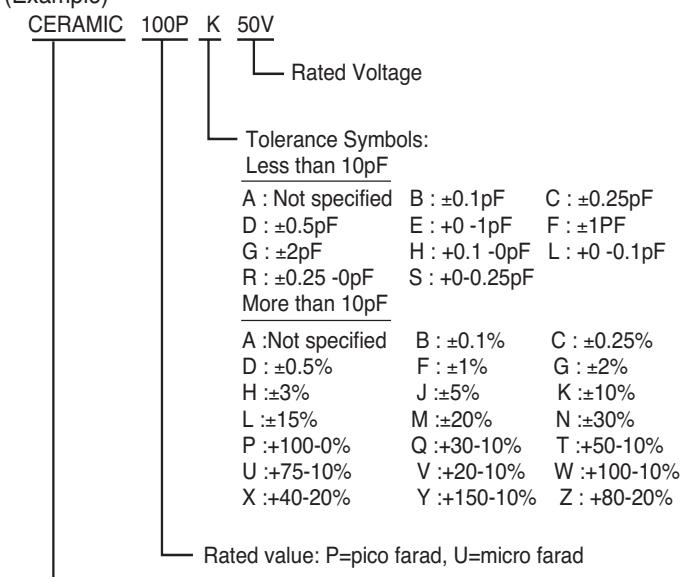

Material:

- CERAMIC..... Ceramic
- MT-PAPER..... Metallized Paper
- POLYESTER..... Polyester
- MT-POLYEST..... Metallized Polyester
- POLYPRO..... Polypropylene
- MT-POLYPRO.... Metallized Polypropylene
- COMPO FILM..... Composite Film
- MT-COMPO..... Metallized Composite
- STYRENE..... Styrene
- TA-SOLID..... Tantalum Solid
- AL-SOLID..... Aluminium Solid
- ELECT..... Electrolytic
- NP-ELECT..... Non-polarised Electrolytic
- OS-SOLID..... Aluminium Solid with Organic Semiconductive Electrolytic


Schematic Location	Part No.	Description
--------------------	----------	-------------

RESISTORS

NOTES:

Read description of the Resistor as follows:

(Example)

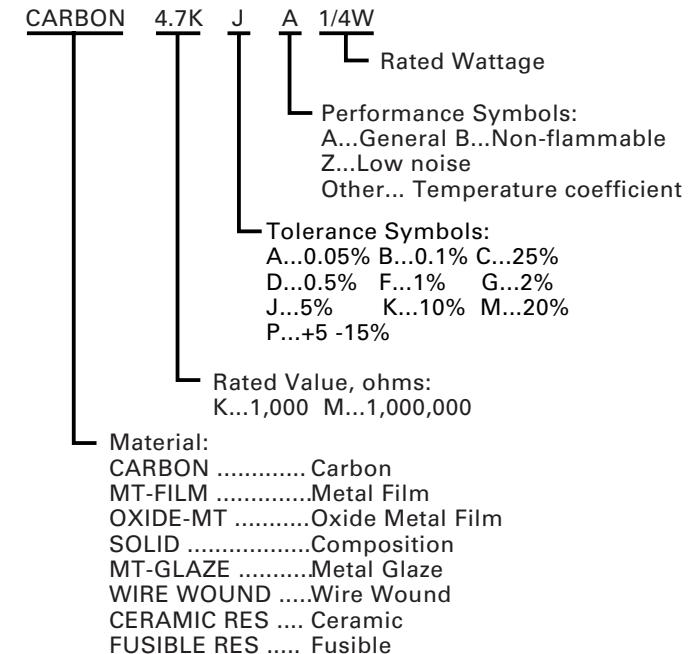

Schematic Location	Part No.	Description			Schematic Location	Part No.	Description		
CAPACITORS									
C001	CPXLB1C100YAN	NP-ELECT	10U M	16V	C839	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V
C001	CPXLB1C100ZAN	NP-ELECT	10U M	16V	C840	CK1H333KLZBNG	CERAMIC	0.033U K	50V
C002	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C841	CEXLB1H2R2VDN	ELECT	2.2 U M	50V
C006	CEXLB1H4R7VDN	ELECT	4.7U M	50V	C841	CEXLB1H2R2WAN	ELECT	2.2U M	50V
C006	CEXLB1H4R7WAN	ELECT	4.7U M	50V	C842	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C007	CEXLB1V470VDN	ELECT	47U M	35V	C1000	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C007	CEXLB1V470WAN	ELECT	47U M	35V	C1001	CEXLB1H100VDN	ELECT	10U M	50V
C008	CK1H102KLZBNG	CERAMIC	1000P K	50V	C1001	CEXLB1H100WAN	ELECT	10U M	50V
C009	CK1H102KLZBNG	CERAMIC	1000P K	50V	C1002	CEXLB1H100VDN	ELECT	10U M	50V
C010	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1002	CEXLB1H100WAN	ELECT	10U M	50V
C011	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1003	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C013	CPXLB1C100YAN	NP-ELECT	10U M	16V	C1003	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C013	CPXLB1C100ZAN	NP-ELECT	10U M	16V	C1004	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C015	CEXLB1C222VDN	ELECT	2200U M	16V	C1004	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C016	CEXLB1H100VDN	ELECT	10U M	50V	C1011	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C016	CEXLB1H100WAN	ELECT	10U M	50V	C1012	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C017	CEXLB1H100VDN	ELECT	10U M	50V	C1012	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C017	CEXLB1H100WAN	ELECT	10U M	50V	C1013	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C018	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1013	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C019	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1014	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C681	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1014	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C684	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1015	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C687	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1015	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C697	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1016	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C703	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1016	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C704	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1017	CEXLB1H4R7VDN	ELECT	4.7U M	50V
C705	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1017	CEXLB1H4R7WAN	ELECT	4.7U M	50V
C706	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1201	CEXLB1V470VDN	ELECT	47U M	35V
C708	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1201	CEXLB1V470WAN	ELECT	47U M	35V
C710	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1202	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C721	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1205	CEXLB1V470VDN	ELECT	47U M	35V
C723	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1205	CEXLB1V470WAN	ELECT	47U M	35V
C800	RGFR000ZTCANL	MT-GLAZE	0.000 ZA	1/10W	C1251	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C804	RGF1003JTCANL	MT-GLAZE	100K JA	1/10W	C1600	CEXLB1E102VDN	ELECT	1K U M	25V
C805	CC1H220JLZCNG	CERAMIC	22P J	50V	C1601	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C806	CC1H220JLZCNG	CERAMIC	22P J	50V	C1602	CE0J102MZVANN	ELECT	1000U M	6.3V
C807	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V	C1603	CK1A105ZLZFNG	CERAMIC	1U Z	10V
C811	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1604	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C813	CEXLB1V470VDN	ELECT	47U M	35V	C1610	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C813	CEXLB1V470WAN	ELECT	47U M	35V	C1611	CK1A105ZLZFNG	CERAMIC	1U Z	10V
C814	CK1H222KLZBNG	CERAMIC	2200P K	50V	C1613	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C815	CC1H220JLZCNG	CERAMIC	22P J	50V	C1614	CEXLBOJ221VDN	ELECT	220U M	6.3V
C816	CC1H220JLZCNG	CERAMIC	22P J	50V	C1614	CEXLBOJ221WAN	ELECT	220U M	6.3V
C820	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V	C1615	CEXLBOJ221VDN	ELECT	220U M	6.3V
C825	CC1H470JLZCNG	CERAMIC	47P J	50V	C1615	CEXLBOJ221WAN	ELECT	220U M	6.3V
C826	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1618	CK1A105ZLZFNG	CERAMIC	1U Z	10V
C827	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1619	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C829	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1620	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V
C834	CEXLBOJ221VDN	ELECT	220U M	6.3V	C1621	CK1A105ZLZFNG	CERAMIC	1U Z	10V
C834	CEXLBOJ221WAN	ELECT	220U M	6.3V	C1622	CK1A105ZLZFNG	CERAMIC	1U Z	10V
C835	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V	C1623	CEXLB1H100VDN	ELECT	10U M	50V
C836	CC1H120JLZCNG	CERAMIC	12P J	50V	C1623	CEXLB1H100WAN	ELECT	10U M	50V
C837	CC1H120JLZCNG	CERAMIC	12P J	50V	C1630	CEXLB1C101VDN	ELECT	100U M	16V

Schematic Location	Part No.	Description				
C1630	CEXLB1C101WAN	ELECT	100U M	16V		
C1631	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1632	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1633	CEXLBOJ102VDN	ELECT	1000U M	6.3V		
C1633	CEXLBOJ102WAN	ELECT	1000U M	6.3V		
C1634	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C1640	CEXLB1C101VDN	ELECT	100U M	16V		
C1640	CEXLB1C101WAN	ELECT	100U M	16V		
C1641	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1642	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1643	CEXLB1C101VDN	ELECT	100U M	16V		
C1643	CEXLB1C101WAN	ELECT	100U M	16V		
C1660	CEXLB1V471WAN	ELECT	470U M	35V		
C1661	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1662	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V		
C1663	CC1H470JLZCNG	CERAMIC	47P J	50V		
C1664	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V		
C1665	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1666	CEXLB1E102VDN	ELECT	1K U M	25V		
C1667	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1800	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1902	CEXLB1H100VDN	ELECT	10U M	50V		
C1902	CEXLB1H100WAN	ELECT	10U M	50V		
C1904	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C1905	CC1H470JLZCNG	CERAMIC	47P J	50V		
C3200	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3201	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3202	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3203	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3204	CK1H223KLZBNG	CERAMIC	0.022U K	50V		
C3205	CK1H222KLZBNG	CERAMIC	2200P K	50V		
C3206	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3208	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3209	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3210	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3211	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3212	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3213	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3214	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3215	CK1H222KLZBNG	CERAMIC	2200P K	50V		
C3216	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3218	CK1C224KLZBNG	CERAMIC	0.22U K	16V		
C3219	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3220	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3221	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C3222	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C3223	CEXLB1C222VDN	ELECT	2200U M	16V		
C5503	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5504	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5505	CK1H102KLZBNG	CERAMIC	1000P K	50V		
C5506	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5507	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5508	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5509	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		

Schematic Location	Part No.	Description				
C5510	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5511	CEXLB1H100VDN	ELECT	10U M	50V		
C5511	CEXLB1H100WAN	ELECT	10U M	50V		
C5512	CEXLB1H100VDN	ELECT	10U M	50V		
C5512	CEXLB1H100WAN	ELECT	10U M	50V		
C5513	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5515	CC1H470JLZCNG	CERAMIC	47P J	50V		
C5516	CC1H470JLZCNG	CERAMIC	47P J	50V		
C5517	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5518	CEXLB1H100VDN	ELECT	10U M	50V		
C5518	CEXLB1H100WAN	ELECT	10U M	50V		
C5519	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5521	CEXLB1H100VDN	ELECT	10U M	50V		
C5521	CEXLB1H100WAN	ELECT	10U M	50V		
C5523	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5529	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5532	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5533	CEXLBOJ221VDN	ELECT	220U M	6.3V		
C5533	CEXLBOJ221WAN	ELECT	220U M	6.3V		
C5534	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5536	CEXLBOJ221VDN	ELECT	220U M	6.3V		
C5536	CEXLBOJ221WAN	ELECT	220U M	6.3V		
C5537	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5538	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V		
C5539	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5542	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5543	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5544	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5545	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5547	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5548	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5549	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5551	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5552	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5553	CEXLB1V470VDN	ELECT	47U M	35V		
C5553	CEXLB1V470WAN	ELECT	47U M	35V		
C5554	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5555	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5557	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5558	CK1H102KLZBNG	CERAMIC	1000P K	50V		
C5560	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5564	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5565	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5566	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5567	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5568	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5570	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5572	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5573	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5574	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5575	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C5576	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C5577	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		

Schematic Location	Part No.	Description			Schematic Location	Part No.	Description		
C5578	CEXLB0J221VDN	ELECT	220U M	6.3V	C6105	CC1H3R0CLZCNG	CERAMIC	3P C	50V
C5578	CEXLB0J221WAN	ELECT	220U M	6.3V	C6106	CC1H390JLZCNG	CERAMIC	39P J	50V
C5580	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6107	CK1A105ZLFNG	CERAMIC	1U Z	10V
C5581	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6109	CK1H103ZLFNG	CERAMIC	0.01U Z	50V
C5582	CKOJ106KGMBNG	CERAMIC	10U K	6.3V	C6127	CEXLB0J102VDN	ELECT	1000U M	6.3V
C5583	CKOJ106KGMBNG	CERAMIC	10U K	6.3V	C6127	CEXLB0J102WAN	ELECT	1000U M	6.3V
C5701	CEXLB1V470VDN	ELECT	47U M	35V	C6144	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5701	CEXLB1V470WAN	ELECT	47U M	35V	C6145	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5702	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6151	CC1H220JLZCNG	CERAMIC	22P J	50V
C5704	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6153	CC1H220JLZCNG	CERAMIC	22P J	50V
C5705	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6155	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5706	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6170	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5707	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6171	CEXLB1V471WAN	ELECT	470U M	35V
C5708	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6172	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5709	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6173	CC1H180JLZCNG	CERAMIC	18P J	50V
C5710	CK1H103ZLFNG	CERAMIC	0.01U Z	50V	C6174	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5711	CK1H103ZLFNG	CERAMIC	0.01U Z	50V	C6175	CC1H180JLZCNG	CERAMIC	18P J	50V
C5712	CK1H103ZLFNG	CERAMIC	0.01U Z	50V	C6176	CEXLB0J102VDN	ELECT	1000U M	6.3V
C5713	CK1H103ZLFNG	CERAMIC	0.01U Z	50V	C6176	CEXLB0J102WAN	ELECT	1000U M	6.3V
C5714	CK1H103ZLFNG	CERAMIC	0.01U Z	50V	C6177	CEXLB1V471WAN	ELECT	470U M	35V
C5715	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6178	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5721	CKOJ475KLZBNG	CERAMIC	4.7U K	6.3V	C6180	CK1H102KLZBNG	CERAMIC	1000P K	50V
C5801	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6181	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5803	CC1H120JLZCNG	CERAMIC	12P J	50V	C6201	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5804	CC1H150JLZCNG	CERAMIC	15P J	50V	C6202	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5805	CC1H270JLZCNG	CERAMIC	27P J	50V	C6203	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5806	CC1H680JLZCNG	CERAMIC	68P J	50V	C6204	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5807	CK1C224KLZBNG	CERAMIC	0.22U K	16V	C6205	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5808	CK1C224KLZBNG	CERAMIC	0.22U K	16V	C6206	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5809	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6207	CK1H103ZLFNG	CERAMIC	0.01U Z	50V
C5812	CC1H120JLZCNG	CERAMIC	12P J	50V	C6208	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5813	CC1H150JLZCNG	CERAMIC	15P J	50V	C6209	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5814	CC1H270JLZCNG	CERAMIC	27P J	50V	C6211	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5815	CC1H680JLZCNG	CERAMIC	68P J	50V	C6212	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5816	CK1C224KLZBNG	CERAMIC	0.22U K	16V	C6213	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5901	CK1A474KLZBNG	CERAMIC	0.47U K	10V	C6214	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5904	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6215	CK1H103ZLFNG	CERAMIC	0.01U Z	50V
C5905	CEXLB1H100VDN	ELECT	10U M	50V	C6216	CK1H473KLZBNG	CERAMIC	0.047U K	50V
C5905	CEXLB1H100WAN	ELECT	10U M	50V	C6217	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C5959	CC1H120JLZCNG	CERAMIC	12P J	50V	C6218	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6051	CK1A105ZLFNG	CERAMIC	1U Z	10V	C6219	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6052	CK1A105ZLFNG	CERAMIC	1U Z	10V	C6221	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6053	CEXLB0J221VDN	ELECT	220U M	6.3V	C6230	CEXLB0J221VDN	ELECT	220U M	6.3V
C6053	CEXLB0J221WAN	ELECT	220U M	6.3V	C6230	CEXLB0J221WAN	ELECT	220U M	6.3V
C6054	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6231	CC1H150JLZCNG	CERAMIC	15P J	50V
C6086	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6232	CC1H150JLZCNG	CERAMIC	15P J	50V
C6087	CEXLB1V470VDN	ELECT	47U M	35V	C6233	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6087	CEXLB1V470WAN	ELECT	47U M	35V	C6234	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6090	CEXLB0J221VDN	ELECT	220U M	6.3V	C6235	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6090	CEXLB0J221WAN	ELECT	220U M	6.3V	C6236	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6091	CK1A105ZLFNG	CERAMIC	1U Z	10V	C6237	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6094	CK1A105ZLFNG	CERAMIC	1U Z	10V	C6238	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6099	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6239	CK1H104ZLFNG	CERAMIC	0.1U Z	50V
C6103	CK1H104ZLFNG	CERAMIC	0.1U Z	50V	C6241	CK1H104ZLFNG	CERAMIC	0.1U Z	50V

Schematic Location	Part No.	Description				
C6242	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6243	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6244	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6245	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6246	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6250	CEXLB1H4R7VDN	ELECT	4.7U M	50V		
C6250	CEXLB1H4R7WAN	ELECT	4.7U M	50V		
C6251	CEXLB1H100VDN	ELECT	10U M	50V		
C6251	CEXLB1H100WAN	ELECT	10U M	50V		
C6252	CEXLB1C101VDN	ELECT	100U M	16V		
C6252	CEXLB1C101WAN	ELECT	100U M	16V		
C6253	CEXLB1H4R7VDN	ELECT	4.7U M	50V		
C6253	CEXLB1H4R7WAN	ELECT	4.7U M	50V		
C6254	CK1A474KLZBNG	CERAMIC	0.47U K	10V		
C6255	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6256	CK1H123KLZBNG	CERAMIC	0.012U K	50V		
C6257	CK1H562KLZBNG	CERAMIC	5600P K	50V		
C6258	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6259	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6260	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6261	CK1H272KLZBNG	CERAMIC	2700P K	50V		
C6262	CK1H473KLZBNG	CERAMIC	0.047U K	50V		
C6263	CT1A3R3KDRANG	TA-SOLID	3.3U K	10V		
C6264	CK1H472KLZBNG	CERAMIC	4700P K	50V		
C6266	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6267	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C6268	CT1A100KDRANG	TA-SOLID	10U K	10V		
C6271	CEXLB1H100VDN	ELECT	10U M	50V		
C6271	CEXLB1H100WAN	ELECT	10U M	50V		
C6272	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6273	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6274	CEXLB1H100VDN	ELECT	10U M	50V		
C6274	CEXLB1H100WAN	ELECT	10U M	50V		
C6276	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6277	CEXLB1H100VDN	ELECT	10U M	50V		
C6277	CEXLB1H100WAN	ELECT	10U M	50V		
C6278	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C6279	CK1H472KLZBNG	CERAMIC	4700P K	50V		
C6281	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6282	CEXLB1H100VDN	ELECT	10U M	50V		
C6282	CEXLB1H100WAN	ELECT	10U M	50V		
C6283	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C6284	CK1H472KLZBNG	CERAMIC	4700P K	50V		
C6291	CEXLB1H4R7VDN	ELECT	4.7U M	50V		
C6291	CEXLB1H4R7WAN	ELECT	4.7U M	50V		
C6292	CEXLB1H4R7VDN	ELECT	4.7U M	50V		
C6292	CEXLB1H4R7WAN	ELECT	4.7U M	50V		
C6330	CEXLB1V470VDN	ELECT	47U M	35V		
C6330	CEXLB1V470WAN	ELECT	47U M	35V		
C6331	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6332	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6333	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6334	RGFR000ZTCANL	MT-GLAZE	0.000 ZA	1/10W		

Schematic Location	Part No.	Description				
C6335	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V		
C6336	CK1H103ZLZFNG	CERAMIC	0.01U Z	50V		
C6337	RGFR000ZTCANL	MT-GLAZE	0.000 ZA	1/10W		
C6338	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6339	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
C6340	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6341	CEXLB0J221VDN	ELECT	220U M	6.3V		
C6341	CEXLB0J221WAN	ELECT	220U M	6.3V		
C6344	CEXLB1C101VDN	ELECT	100U M	16V		
C6344	CEXLB1C101WAN	ELECT	100U M	16V		
C6354	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6355	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6361	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C6362	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6363	CEXLB1H4R7VDN	ELECT	4.7U M	50V		
C6364	CEXLB1C101VDN	ELECT	100U M	16V		
C6364	CEXLB1C101WAN	ELECT	100U M	16V		
C6365	CK1H104ZLZFNG	CERAMIC	0.1U Z	50V		
C6367	CK1A105ZLZFNG	CERAMIC	1U Z	10V		
C6565	CK0J475KLZBNG	CERAMIC	4.7U K	6.3V		
DIODES						
D801	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D802	DZUDZS6.2B--G	ZENER DIODE UDZS6.2B TE-17				
D1600	DDD1FM3----G	DIODE D1FM3				
D1602	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1604	DZUDZS3.0B--G	ZD UDZS3.0B-TE-17				
D1610	DZUDZS3.9B--G	ZD UDZS-TE-173.9B				
D1620	DDD1FH3----G	DIODE D1FH3				
D1621	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1630	DDD1FH3----G	DIODE D1FH3				
D1631	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1640	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1660	DDD1FM3----G	DIODE D1FM3				
D1662	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1663	DZUDZS3.6B--G	ZD UDZS-TE-173.6B				
D1683	DD1SS352----G	DIODE 1SS352-(TPH3)				
	DD1SS355----G	DIODE 1SS355 TE-17				
D1902	DLSLR343MC3FN	LED SLR-343MC3F				
D3216	DDRB551V-30-G	DIODE RB551V-30 TE-17				
D6250	DD1SS355----G	DIODE 1SS355 TE-17				
INTEGRATED CIRCUITS						
IC001	QLA42032-E--N	IC LA42032-E				
IC801	QXXAVC880---M	IC LC874164A-58S8-E				

Schematic Location	Part No.	Description	Schematic Location	Part No.	Description
IC802	QLE24C042M-EP	IC LE24C042M-TLM-E	L1621	1LB4L26B1030N	INDUCTOR, 56UH
	QXXAVC820--P	IC AT24C04N-10SU-1.8	L1622	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QXXAVC844--P	IC CAT24C04WI-GT3	L1630	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QXXGA0500017P	IC LE24C0411M-TLM-E-C	L1631	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC805	QTC7SH08FU--P	IC TC7SH08FU	L1632	1AV4L2WK560MN	INDUCTOR, 56U M
IC806	QTC7SET08FU-P	IC TC7SET08FU	L1632	1LB4L26B1030N	INDUCTOR, 56UH
IC1201	QCD4052BNSR-P	IC CD4052BNSR	L1640	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QTC4052BF---P	IC TC4052BF-EL	L1656	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC1251	QCD4052BNSR-P	IC CD4052BNSR	L1657	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QTC4052BF---P	IC TC4052BF-EL	L1658	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC1600	QLA5774MPE--P	IC LA5774MP-DL-E	L1659	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC1610	QPQ070XNA1ZPP	IC PQ070XNA1ZPH	L1660	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC1620	QXXAVC830---P	IC PQ6CU12X2APQ	L1661	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC1630	QPQ1CZ41H2FPK	IC PQ1CZ41H2FPH	L1663	1AV4L2WK470MN	INDUCTOR, 47U M
IC1640	QXXAVC692---P	IC PQ1LAX95MSPQ	L1663	1LB4L26B1020N	INDUCTOR, 47UH
IC1660	QLA5774MPE--P	IC LA5774MP-DL-E	L1665	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC3200	QNJW1142AV--P	IC NJW1142AV	L1666	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC5500	QXXAVC921---M	IC ZR39760HGCF-A1	L1669	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC5700	QXXAVC926---M	IC EDD2516AETA-5B-E	L1670	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC5750	QXXAVC948B--P	IC QXXAVC948B--P	L1672	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QXXAVC948A--P	IC QXXAVC948A--P	L1675	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QXXAVC948---P	IC QXXAVC948---P	L1676	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC5900	QM51957BFP--P	IC M51957BFP	L1686	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6050	QPQ070XNA1ZPP	IC PQ070XNA1ZPH	L1687	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6090	QPQ070XNA1ZPP	IC PQ070XNA1ZPH	L1688	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6200	QXXAVC650---M	IC ISL98001CQZ-140	L1689	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6250	QCXA2207N---P	IC CXA2207N-T6	L1690	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6270	QXXAVC859---P	IC WM8738GED/RV	L1691	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6301	QCD4052BNSR-P	IC CD4052BNSR	L1701	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
	QTC4052BF---P	IC TC4052BF-EL	L1704	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
IC6330	QCS4352-CZZ-P	IC CS4352-CZZ	L1705	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
			L1706	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
			L1707	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W

COILS

L001	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L1800	1AV4L2FB3R3MG	INDUCTOR, 3.3U M
L002	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L1802	1AV4L2FB3R3MG	INDUCTOR, 3.3U M
L003	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L1803	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L004	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L1901	1AV4L2B95R6KN	INDUCTOR, 5.6U K
L1000	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L1901	1AV4L2GU5R6KN	INDUCTOR, 5.6U K
L1201	1AV4L2FB3R3MG	INDUCTOR, 3.3U M	L2001	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1202	1AV4L2FB3R3MG	INDUCTOR, 3.3U M	L2002	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1600	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2003	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1601	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2004	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1603	1AV4L2WK150MN	INDUCTOR, 15U M	L2006	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1603	1LB4L26B1000N	INDUCTOR, 15UH	L2007	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1610	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2009	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1611	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2011	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1612	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2012	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1615	1LB4L26B0740G	INDUCTOR, 220 OHM	L2014	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1616	1LB4L26B0740G	INDUCTOR, 220 OHM	L2015	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1617	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2016	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1618	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L2017	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1619	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L5500	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1620	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W	L5506	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L1621	1AV4L2WK560MN	INDUCTOR, 56U M	L5508	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
L5510	1LB4L26B0740G	INDUCTOR, 220 OHM
L5511	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5512	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5513	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5514	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5516	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5545	1AV4L2WK150MN	INDUCTOR, 15U M
L5545	1LB4L26B1000N	INDUCTOR, 15UH
L5553	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5565	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5566	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5750	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5800	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L5801	1AV4L2GA150JG	INDUCTOR, 15U J
L5802	1AV4L2GA150JG	INDUCTOR, 15U J
L6050	1LB4L26B0740G	INDUCTOR 220 OHM
L6051	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6052	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6091	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6100	1AV4L2GAR22JG	INDUCTOR, 0.22U J
L6101	1LB4L26B0740G	INDUCTOR, 220 OHM
L6120	1AV4L26B1940G	INDUCTOR, 120 OHM
L6120	1LB4L26B0700G	INDUCTOR, 120 OHM
L6122	1AV4L26B1940G	INDUCTOR, 120 OHM
L6122	1LB4L26B0700G	INDUCTOR, 120 OHM
L6150	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6151	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6153	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6154	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6155	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6157	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6159	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6161	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6162	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6168	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6169	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6170	1AV4L2FB3R3MG	INDUCTOR, 3.3U M
L6171	1AV4L2FB3R3MG	INDUCTOR, 3.3U M
L6172	1AV4L2FB3R3MG	INDUCTOR, 3.3U M
L6174	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6176	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6178	1AV4L26B1940G	INDUCTOR, 120 OHM
L6178	1LB4L26B0700G	INDUCTOR, 120 OHM
L6179	1AV4L26B1940G	INDUCTOR, 120 OHM
L6179	1LB4L26B0700G	INDUCTOR, 120 OHM
L6188	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6189	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6201	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6202	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6203	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6204	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6206	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6220	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6221	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W

Schematic Location	Part No.	Description
L6222	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6223	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6224	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6225	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6226	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6227	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6250	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6270	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6271	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6277	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6279	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6282	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6332	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6333	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6334	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6335	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6354	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6355	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6357	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6358	1AV4L3EK201-G	IMPEDANCE, 200 OHM -
L6359	1AV4L3EK201-G	IMPEDANCE, 200 OHM -
L6360	1AV4L3EK201-G	IMPEDANCE, 200 OHM -
L6393	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6394	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6395	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6396	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6550	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6551	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6552	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6555	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6556	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6557	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6558	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6559	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6566	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6567	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6568	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6569	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
L6701	RGFR000ZTAANL	MT-GLAZE 0.000 ZA 1/10W
Q101	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q101	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q101	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q101	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q101	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q101	T2SC3928A1R-P	TR 2SC3928A1R
Q101	T2SC3928A1S-P	TR 2SC3928A1S
Q801	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q801	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q801	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q801	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q801	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q801	T2SC3928A1R-P	TR 2SC3928A1R

TRANSISTORS

Schematic Location	Part No.	Description
Q801	T2SC3928A1S-P	TR 2SC3928A1S
Q803	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q803	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q803	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q803	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q803	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q803	T2SC3928A1R-P	TR 2SC3928A1R
Q803	T2SC3928A1S-P	TR 2SC3928A1S
Q804	T2SA1037AK-RP	TR 2SA1037AK T146 R
Q804	T2SA1037AK-SP	TR 2SA1037AK T146 S
Q804	T2SA1037K-R-P	TR 2SA1037K-T-96-R
Q804	T2SA1037K-S-P	TR 2SA1037K-T-96-S
Q804	T2SA1179-M6-P	TR 2SA1179-M6
Q804	T2SA1179-M7-P	TR 2SA1179-M7-TB
Q804	T2SA1179N-M6P	TR 2SA1179N-M6-TB
Q804	T2SA1235A1E-P	TR 2SA1235A1E
Q804	T2SA1235A1F-P	TR 2SA1235A1F
Q1006	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1006	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1006	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1006	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1006	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1006	T2SC3928A1R-P	TR 2SC3928A1R
Q1006	T2SC3928A1S-P	TR 2SC3928A1S
Q1007	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1007	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1007	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1007	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1007	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1007	T2SC3928A1R-P	TR 2SC3928A1R
Q1007	T2SC3928A1S-P	TR 2SC3928A1S
Q1200	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1200	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1200	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1200	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1200	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1200	T2SC3928A1R-P	TR 2SC3928A1R
Q1200	T2SC3928A1S-P	TR 2SC3928A1S
Q1201	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1201	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1201	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1201	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1201	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1201	T2SC3928A1R-P	TR 2SC3928A1R
Q1201	T2SC3928A1S-P	TR 2SC3928A1S
Q1202	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1202	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1202	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1202	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1202	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1202	T2SC3928A1R-P	TR 2SC3928A1R
Q1202	T2SC3928A1S-P	TR 2SC3928A1S
Q1203	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1203	T2SC2412K-S-P	TR 2SC2412K-T-96-S

Schematic Location	Part No.	Description
Q1203	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1203	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1203	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1203	T2SC3928A1R-P	TR 2SC3928A1R
Q1203	T2SC3928A1S-P	TR 2SC3928A1S
Q1251	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1251	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1251	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1251	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1251	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1251	T2SC3928A1R-P	TR 2SC3928A1R
Q1251	T2SC3928A1S-P	TR 2SC3928A1S
Q1252	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1252	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1252	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1252	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1252	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1252	T2SC3928A1R-P	TR 2SC3928A1R
Q1252	T2SC3928A1S-P	TR 2SC3928A1S
Q1261	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1261	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1261	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1261	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1261	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1261	T2SC3928A1R-P	TR 2SC3928A1R
Q1261	T2SC3928A1S-P	TR 2SC3928A1S
Q1262	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1262	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1262	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1262	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1262	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1262	T2SC3928A1R-P	TR 2SC3928A1R
Q1262	T2SC3928A1S-P	TR 2SC3928A1S
Q1600	T2SA1037AK-RP	TR 2SA1037AK T146 R
Q1600	T2SA1037AK-SP	TR 2SA1037AK T146 S
Q1600	T2SA1037K-R-P	TR 2SA1037K-T-96-R
Q1600	T2SA1037K-S-P	TR 2SA1037K-T-96-S
Q1600	T2SA1179-M6-P	TR 2SA1179-M6
Q1600	T2SA1179-M7-P	TR 2SA1179-M7-TB
Q1600	T2SA1179N-M6P	TR 2SA1179N-M6-TB
Q1600	T2SA1235A1E-P	TR 2SA1235A1E
Q1600	T2SA1235A1F-P	TR 2SA1235A1F
Q1601	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1601	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1601	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1601	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1601	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1601	T2SC3928A1R-P	TR 2SC3928A1R
Q1601	T2SC3928A1S-P	TR 2SC3928A1S
Q1603	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1603	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1603	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1603	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1603	T2SC2812N-L6P	TR 2SC2812N-L6-TB

Schematic Location	Part No.	Description
Q1603	T2SC3928A1R-P	TR 2SC3928A1R
Q1603	T2SC3928A1S-P	TR 2SC3928A1S
Q1605	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1605	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1605	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1605	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1605	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1605	T2SC3928A1R-P	TR 2SC3928A1R
Q1605	T2SC3928A1S-P	TR 2SC3928A1S
Q1606	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1606	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1606	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1606	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1606	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1606	T2SC3928A1R-P	TR 2SC3928A1R
Q1606	T2SC3928A1S-P	TR 2SC3928A1S
Q1661	T2SA1037AK-RP	TR 2SA1037AK T146 R
Q1661	T2SA1037AK-SP	TR 2SA1037AK T146 S
Q1661	T2SA1037K-R-P	TR 2SA1037K-T-96-R
Q1661	T2SA1037K-S-P	TR 2SA1037K-T-96-S
Q1661	T2SA1179-M6-P	TR 2SA1179-M6
Q1661	T2SA1179-M7-P	TR 2SA1179-M7-TB
Q1661	T2SA1179N-M6P	TR 2SA1179N-M6-TB
Q1661	T2SA1235A1E-P	TR 2SA1235A1E
Q1661	T2SA1235A1F-P	TR 2SA1235A1F
Q1804	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1804	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1804	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1804	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1804	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1804	T2SC3928A1R-P	TR 2SC3928A1R
Q1804	T2SC3928A1S-P	TR 2SC3928A1S
Q1871	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q1871	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q1871	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q1871	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q1871	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q1871	T2SC3928A1R-P	TR 2SC3928A1R
Q1871	T2SC3928A1S-P	TR 2SC3928A1S
Q5545	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q5545	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q5545	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q5545	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q5545	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q5545	T2SC3928A1R-P	TR 2SC3928A1R
Q5545	T2SC3928A1S-P	TR 2SC3928A1S
Q5801	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q5801	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q5801	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q5801	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q5801	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q5801	T2SC3928A1R-P	TR 2SC3928A1R
Q5801	T2SC3928A1S-P	TR 2SC3928A1S
Q5802	T2SA1037AK-RP	TR 2SA1037AK T146 R

Schematic Location	Part No.	Description
Q5802	T2SA1037AK-SP	TR 2SA1037AK T146 S
Q5802	T2SA1037K-R-P	TR 2SA1037K-T-96-R
Q5802	T2SA1037K-S-P	TR 2SA1037K-T-96-S
Q5802	T2SA1179-M6-P	TR 2SA1179-M6
Q5802	T2SA1179-M7-P	TR 2SA1179-M7-TB
Q5802	T2SA1179N-M6P	TR 2SA1179N-M6-TB
Q5802	T2SA1235A1E-P	TR 2SA1235A1E
Q5802	T2SA1235A1F-P	TR 2SA1235A1F
Q5803	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q5803	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q5803	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q5803	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q5803	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q5803	T2SC3928A1R-P	TR 2SC3928A1R
Q5803	T2SC3928A1S-P	TR 2SC3928A1S
Q5804	T2SA1037AK-RP	TR 2SA1037AK T146 R
Q5804	T2SA1037AK-SP	TR 2SA1037AK T146 S
Q5804	T2SA1037K-R-P	TR 2SA1037K-T-96-R
Q5804	T2SA1037K-S-P	TR 2SA1037K-T-96-S
Q5804	T2SA1179-M6-P	TR 2SA1179-M6
Q5804	T2SA1179-M7-P	TR 2SA1179-M7-TB
Q5804	T2SA1179N-M6P	TR 2SA1179N-M6-TB
Q5804	T2SA1235A1E-P	TR 2SA1235A1E
Q5804	T2SA1235A1F-P	TR 2SA1235A1F
Q5901	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q5901	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q5901	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q5901	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q5901	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q5901	T2SC3928A1R-P	TR 2SC3928A1R
Q5901	T2SC3928A1S-P	TR 2SC3928A1S
Q5902	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q5902	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q5902	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q5902	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q5902	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q5902	T2SC3928A1R-P	TR 2SC3928A1R
Q5902	T2SC3928A1S-P	TR 2SC3928A1S
Q6100	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q6100	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q6100	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q6100	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q6100	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q6100	T2SC3928A1R-P	TR 2SC3928A1R
Q6100	T2SC3928A1S-P	TR 2SC3928A1S
Q6101	T2SC2412K-R-P	TR 2SC2412K-T-96-R
Q6101	T2SC2412K-S-P	TR 2SC2412K-T-96-S
Q6101	T2SC2812-L6-P	TR 2SC2812-L6-TB
Q6101	T2SC2812-L7-P	TR 2SC2812-L7-TB
Q6101	T2SC2812N-L6P	TR 2SC2812N-L6-TB
Q6101	T2SC3928A1R-P	TR 2SC3928A1R
Q6101	T2SC3928A1S-P	TR 2SC3928A1S
Q6250	T2SA1037AK-RP	TR 2SA1037AK T146 R
Q6250	T2SA1037AK-SP	TR 2SA1037AK T146 S

Schematic Location	Part No.	Description	Schematic Location	Part No.	Description
Q6250	T2SA1037K-R-P	TR 2SA1037K-T-96-R	RB6202	1AV4R1D33304G	R-NETWORK 33X4 1/32W
Q6250	T2SA1037K-S-P	TR 2SA1037K-T-96-S	RB6203	1AV4R1D33304G	R-NETWORK 33X4 1/32W
Q6250	T2SA1179-M6-P	TR 2SA1179-M6	RB6204	1AV4R1D33304G	R-NETWORK 33X4 1/32W
Q6250	T2SA1179-M7-P	TR 2SA1179-M7-TB	RB6205	1AV4R1D33304G	R-NETWORK 33X4 1/32W
Q6250	T2SA1179N-M6P	TR 2SA1179N-M6-TB	RB6206	1AV4R1D33304G	R-NETWORK 33X4 1/32W
Q6250	T2SA1235A1E-P	TR 2SA1235A1E	RB6330	1AV4R1D31504G	R-NETWORK 15X4 1/32W
Q6250	T2SA1235A1F-P	TR 2SA1235A1F	RB6355	1AV4R1D30R04G	R-NETWORK 0X4 1/32W
Q6251	T2SA1037AK-RP	TR 2SA1037AK T146 R	RB6356	1AV4R1D30R04G	R-NETWORK 0X4 1/32W
Q6251	T2SA1037AK-SP	TR 2SA1037AK T146 S	R001	RGF3301JTCANL	MT-GLAZE 3.3K JA 1/10W
Q6251	T2SA1037K-R-P	TR 2SA1037K-T-96-R	R002	RGF3301JTCANL	MT-GLAZE 3.3K JA 1/10W
Q6251	T2SA1037K-S-P	TR 2SA1037K-T-96-S	R003	RGF1801JTCANL	MT-GLAZE 1.8K JA 1/10W
Q6251	T2SA1179-M6-P	TR 2SA1179-M6	R004	RGF1801JTCANL	MT-GLAZE 1.8K JA 1/10W
Q6251	T2SA1179-M7-P	TR 2SA1179-M7-TB	R005	RGAR000ZTDANL	MT-GLAZE 0.000 ZA 1/2W
Q6251	T2SA1179N-M6P	TR 2SA1179N-M6-TB	R006	RGAR000ZTDANL	MT-GLAZE 0.000 ZA 1/2W
Q6251	T2SA1235A1E-P	TR 2SA1235A1E	R008	RGF1002JTCANL	MT-GLAZE 10K JA 1/10W
Q6251	T2SA1235A1F-P	TR 2SA1235A1F	R014	RGB2R20JTBANL	MT-GLAZE 2.2 JA 1/4W
Q6354	T2SC2411K-Q-P	TR 2SC2411K-T146-Q	R015	RGB2R20JTBANL	MT-GLAZE 2.2 JA 1/4W
Q6360	T2SC2412K-R-P	TR 2SC2412K-T-96-R	R016	RGB2R20JTBANL	MT-GLAZE 2.2 JA 1/4W
Q6360	T2SC2412K-S-P	TR 2SC2412K-T-96-S	R017	RGB2R20JTBANL	MT-GLAZE 2.2 JA 1/4W
Q6360	T2SC2812-L6-P	TR 2SC2812-L6-TB	R105	RGF47R0JTCANL	MT-GLAZE 47 JA 1/10W
Q6360	T2SC2812-L7-P	TR 2SC2812-L7-TB	R109	RGF4700JTCANL	MT-GLAZE 470 JA 1/10W
Q6360	T2SC2812N-L6P	TR 2SC2812N-L6-TB	R110	RGFR000ZTCANL	MT-GLAZE 0.000 ZA 1/10W
Q6360	T2SC3928A1R-P	TR 2SC3928A1R	R802	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6360	T2SC3928A1S-P	TR 2SC3928A1S	R803	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6362	T2SC2412K-R-P	TR 2SC2412K-T-96-R	R804	RGF1002JTCANL	MT-GLAZE 10K JA 1/10W
Q6362	T2SC2412K-S-P	TR 2SC2412K-T-96-S	R807	RGF6801JTCANL	MT-GLAZE 6.8K JA 1/10W
Q6362	T2SC2812-L6-P	TR 2SC2812-L6-TB	R809	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6362	T2SC2812-L7-P	TR 2SC2812-L7-TB	R812	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
Q6362	T2SC2812N-L6P	TR 2SC2812N-L6-TB	R814	RGFR000ZTCANL	MT-GLAZE 0.000 ZA 1/10W
Q6362	T2SC3928A1R-P	TR 2SC3928A1R	R815	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
Q6362	T2SC3928A1S-P	TR 2SC3928A1S	R816	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
Q6363	TMCH6306---P	TR MCH6306-TL	R817	RGF1004JTCANL	MT-GLAZE 1M JA 1/10W
Q6365	T2SA1037AK-RP	TR 2SA1037AK T146 R	R821	RGF1002JTCANL	MT-GLAZE 10K JA 1/10W
Q6365	T2SA1037AK-SP	TR 2SA1037AK T146 S	R822	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6365	T2SA1037K-R-P	TR 2SA1037K-T-96-R	R823	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
Q6365	T2SA1037K-S-P	TR 2SA1037K-T-96-S	R824	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
Q6365	T2SA1179-M6-P	TR 2SA1179-M6	R828	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6365	T2SA1179-M7-P	TR 2SA1179-M7-TB	R829	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
Q6365	T2SA1179N-M6P	TR 2SA1179N-M6-TB	R830	RGF1002JTCANL	MT-GLAZE 10K JA 1/10W
Q6365	T2SA1235A1E-P	TR 2SA1235A1E	R831	RGF4702JTCANL	MT-GLAZE 47K JA 1/10W
Q6365	T2SA1235A1F-P	TR 2SA1235A1F	R832	RGF4702JTCANL	MT-GLAZE 47K JA 1/10W
			R833	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
			R834	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W
RB5571	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R838	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5572	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R839	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5573	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R840	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5574	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R841	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5575	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R842	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5576	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R843	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5577	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R844	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5578	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R845	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB5583	1AV4R1D31504G	R-NETWORK 15X4 1/32W	R846	RGF1000JTCANL	MT-GLAZE 100 JA 1/10W
RB6201	1AV4R1D33304G	R-NETWORK 33X4 1/32W	R847	RGF4701JTCANL	MT-GLAZE 4.7K JA 1/10W

RESISTORS

RB5571	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5572	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5573	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5574	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5575	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5576	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5577	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5578	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB5583	1AV4R1D31504G	R-NETWORK 15X4 1/32W
RB6201	1AV4R1D33304G	R-NETWORK 33X4 1/32W

Schematic Location	Part No.	Description	
R848	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R849	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R850	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R851	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R854	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R855	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R856	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R857	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R858	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R859	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R860	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R861	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R862	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R863	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R864	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R865	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R867	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R868	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R873	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R874	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R875	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R883	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R884	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R885	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R888	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R889	RGF1004JTCANL	MT-GLAZE	1M JA 1/10W
R890	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R891	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R893	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R895	RGF4703JTCANL	MT-GLAZE	470K JA 1/10W
R1000	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1001	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1002	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1003	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1004	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R1005	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1006	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1007	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1008	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1009	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1010	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1011	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1012	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1013	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1014	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1016	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1019	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1020	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1025	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1026	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1031	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1032	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1037	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1038	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W

Schematic Location	Part No.	Description	
R1043	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1044	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1049	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1050	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1051	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W
R1052	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1053	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R1054	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W
R1055	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1056	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R1057	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1058	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1059	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1060	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1061	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1062	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1063	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1064	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1065	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1066	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1067	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1068	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1069	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1070	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R1071	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1072	RGF3303JTCANL	MT-GLAZE	330K JA 1/10W
R1073	RGF75R0JTCANL	MT-GLAZE	75 JA 1/10W
R1074	RGF82R0JTCANL	MT-GLAZE	82 JA 1/10W
R1075	RGF82R0JTCANL	MT-GLAZE	82 JA 1/10W
R1200	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1201	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1202	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1203	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1204	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1205	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1206	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1207	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1208	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1209	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1210	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1211	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1212	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1253	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1254	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1255	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1256	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1257	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1261	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1262	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1263	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1264	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1265	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1266	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1267	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W

Schematic Location	Part No.	Description		Schematic Location	Part No.	Description	
R1269	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W	R1698	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1271	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W	R1699	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1600	RGF3300FTCANL	MT-GLAZE	330 FA 1/10W	R1800	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1601	RGF1800FTCANL	MT-GLAZE	180 FA 1/10W	R1802	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1602	RGF1001FTCANL	MT-GLAZE	1K FA 1/10W	R1803	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1606	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1806	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1607	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1807	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1608	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1808	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1609	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W	R1809	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1611	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1827	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1612	RGF5600FTCANL	MT-GLAZE	560 FA 1/10W	R1828	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1614	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W	R1829	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1615	RGF2202JTCANL	MT-GLAZE	22K JA 1/10W	R1830	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1616	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1831	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1617	RGF1501FTCANL	MT-GLAZE	1.5K FA 1/10W	R1832	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1618	RGF1201FTCANL	MT-GLAZE	1.2K FA 1/10W	R1835	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1619	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1838	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1620	RGF2702FTCANL	MT-GLAZE	27K FA 1/10W	R1852	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W
R1621	RGF1002FTCANL	MT-GLAZE	10K FA 1/10W	R1855	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1622	RGF1201FTCANL	MT-GLAZE	1.2K FA 1/10W	R1857	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1623	RGF1203JTCANL	MT-GLAZE	120K JA 1/10W	R1859	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1624	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1861	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1625	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W	R1871	RGF3300JTCANL	MT-GLAZE	330 JA 1/10W
R1626	RGF1202JTCANL	MT-GLAZE	12K JA 1/10W	R1872	RGF2202JTCANL	MT-GLAZE	22K JA 1/10W
R1630	RGF1501FTCANL	MT-GLAZE	1.5K FA 1/10W	R1874	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1631	RGF1501FTCANL	MT-GLAZE	1.5K FA 1/10W	R1901	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1632	RGF1001FTCANL	MT-GLAZE	1K FA 1/10W	R1902	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1640	RGF6801FTCANL	MT-GLAZE	6.8K FA 1/10W	R1903	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R1641	RGF5602FTCANL	MT-GLAZE	56K FA 1/10W	R1904	RGF1801JTCANL	MT-GLAZE	1.8K JA 1/10W
R1642	RGF1002FTCANL	MT-GLAZE	10K FA 1/10W	R1905	RGF2201JTCANL	MT-GLAZE	2.2K JA 1/10W
R1646	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R1906	RGF3901JTCANL	MT-GLAZE	3.9K JA 1/10W
R1647	1AV4L26B1940G	INDUCTOR, 120 OHM		R1907	RGF5601JTCANL	MT-GLAZE	5.6K JA 1/10W
R1647	1LB4L26B0700G	INDUCTOR, 120 OHM		R1909	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R1648	1AV4L26B1940G	INDUCTOR, 120 OHM		R1910	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R1648	1LB4L26B0700G	INDUCTOR, 120 OHM		R1911	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R1649	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R1912	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1656	RGFR000ZTAANL	MT-GLAZE	0.000 ZA 1/10W	R3200	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1657	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R3201	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1658	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R5504	RGFR000ZTAANL	MT-GLAZE	0.000 ZA 1/10W
R1660	RGF5600FTCANL	MT-GLAZE	560 FA 1/10W	R5507	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1664	RGF1201FTCANL	MT-GLAZE	1.2K FA 1/10W	R5508	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1665	RGF1001FTCANL	MT-GLAZE	1K FA 1/10W	R5509	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1666	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R5510	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R1667	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W	R5513	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1668	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R5514	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1673	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R5515	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1674	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W	R5516	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1675	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W	R5517	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
▲R1685	RGFR000ZTAANL	MT-GLAZE	0.000 ZA 1/10W	R5518	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1687	RGF3302JTCANL	MT-GLAZE	33K JA 1/10W	R5519	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1688	RGF2202JTCANL	MT-GLAZE	22K JA 1/10W	R5520	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R1690	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R5521	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R1695	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R5523	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R1697	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R5524	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W

Schematic Location	Part No.	Description	
R5525	RGF3900FTCANL	MT-GLAZE	390 FA 1/10W
R5527	RGF3302JTCANL	MT-GLAZE	33K JA 1/10W
R5528	RGF8200FTCANL	MT-GLAZE	820 FA 1/10W
R5529	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5532	RGF1501JTCANL	MT-GLAZE	1.5K JA 1/10W
R5538	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5540	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5542	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5545	RGF2201JTCANL	MT-GLAZE	2.2K JA 1/10W
R5546	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R5547	RGF3301JTCANL	MT-GLAZE	3.3K JA 1/10W
R5548	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5549	RGF1502JTCANL	MT-GLAZE	15K JA 1/10W
R5550	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R5551	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R5552	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R5553	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5557	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5558	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5559	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5560	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5561	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5564	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5565	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5566	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5567	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5568	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5569	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5570	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W
R5572	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5573	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5574	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5575	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5576	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5577	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R5578	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5579	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5588	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5590	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5592	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5595	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5596	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5700	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R5803	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5804	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5805	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5807	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5808	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5809	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R5813	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5814	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5815	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5817	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W
R5818	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W

Schematic Location	Part No.	Description	
R5901	RGF1202JTCANL	MT-GLAZE	12K JA 1/10W
R5902	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R5903	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W
R5904	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W
R5905	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R5906	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R5907	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R5908	RGF2202JTCANL	MT-GLAZE	22K JA 1/10W
R5951	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5953	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5954	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R5955	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5956	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5957	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5958	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5959	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W
R5974	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5975	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R5976	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R6050	RGF5600FTCANL	MT-GLAZE	560 FA 1/10W
R6051	RGF1501FTCANL	MT-GLAZE	1.5K FA 1/10W
R6052	RGF1201FTCANL	MT-GLAZE	1.2K FA 1/10W
R6053	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6085	RGF4701FTCANL	MT-GLAZE	4.7K FA 1/10W
R6086	RGF4701FTCANL	MT-GLAZE	4.7K FA 1/10W
R6087	RGF1001FTCANL	MT-GLAZE	1K FA 1/10W
R6088	RGF1200FTCANL	MT-GLAZE	120 FA 1/10W
R6089	RGF1001FTCANL	MT-GLAZE	1K FA 1/10W
R6093	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6100	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R6101	RGF2201JTCANL	MT-GLAZE	2.2K JA 1/10W
R6104	RGF2202JTCANL	MT-GLAZE	22K JA 1/10W
R6108	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6110	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R6117	RGF3302JTCANL	MT-GLAZE	33K JA 1/10W
R6118	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R6119	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6124	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R6125	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6126	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6129	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R6130	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6174	RGF4702JTCANL	MT-GLAZE	47K JA 1/10W
R6176	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R6177	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R6178	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W
R6200	RGF3302JTCANL	MT-GLAZE	33K JA 1/10W
R6201	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R6204	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R6208	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W
R6209	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R6213	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R6216	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W
R6221	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W

Schematic Location	Part No.	Description		Schematic Location	Part No.	Description	
R6222	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W	R6285	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R6225	RGF10R0JTCANL	MT-GLAZE	10 JA 1/10W	R6286	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6229	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R6287	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6231	RGF10R0JTCANL	MT-GLAZE	10 JA 1/10W	R6300	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W
R6233	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W	R6332	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R6235	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W	R6333	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6236	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W	R6334	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6237	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W	R6335	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6238	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W	R6337	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W
R6240	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R6340	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R6241	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R6343	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6244	RGF33R0JTCANL	MT-GLAZE	33 JA 1/10W	R6346	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6250	RGF6802FTCANL	MT-GLAZE	68K FA 1/10W	R6348	RGF3300JTCANL	MT-GLAZE	330 JA 1/10W
R6251	RGF1003JTCANL	MT-GLAZE	100K JA 1/10W	R6349	RGF4700JTCANL	MT-GLAZE	470 JA 1/10W
R6252	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W	R6350	RGF4701JTCANL	MT-GLAZE	4.7K JA 1/10W
R6253	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W	R6354	RGF1001JTCANL	MT-GLAZE	1K JA 1/10W
R6254	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W	R6355	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W
R6255	RGF1004JTCANL	MT-GLAZE	1M JA 1/10W	R6364	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6257	RGF3301JTCANL	MT-GLAZE	3.3K JA 1/10W	R6365	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6258	RGF3001FTCANL	MT-GLAZE	3K FA 1/10W	R6366	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R6261	RGF3901JTCANL	MT-GLAZE	3.9K JA 1/10W	R6367	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W
R6262	RGF3300JTCANL	MT-GLAZE	330 JA 1/10W	R6369	RGF3902JTCANL	MT-GLAZE	39K JA 1/10W
R6263	RGF3300JTCANL	MT-GLAZE	330 JA 1/10W	R6370	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W
R6264	RGFR000ZTCANL	MT-GLAZE	0.000 ZA 1/10W	R6377	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R6266	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W	R6378	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W
R6267	RGF2200JTCANL	MT-GLAZE	220 JA 1/10W	R6381	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6271	RGF47R0JTCANL	MT-GLAZE	47 JA 1/10W	R6382	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6272	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W	R6383	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6273	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R6384	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6276	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W	R6385	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6277	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W	R6386	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6278	RGF15R0JTCANL	MT-GLAZE	15 JA 1/10W	R6387	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6281	RGF1002JTCANL	MT-GLAZE	10K JA 1/10W	R6388	RGF1000JTCANL	MT-GLAZE	100 JA 1/10W
R6282	RGF6800JTCANL	MT-GLAZE	680 JA 1/10W				
R6283	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W				
R6284	RGF2203JTCANL	MT-GLAZE	220K JA 1/10W				

Schematic Location	Part No.	Description
--------------------	----------	-------------

SWITCHES

SW1901	1AV4S10B0900J	SWITCH, PUSH 1P-1T
SW1901	1AV4S10B5650J	SWITCH, PUSH 1P-1TX1
SW1902	1AV4S10B0900J	SWITCH, PUSH 1P-1T
SW1902	1AV4S10B5650J	SWITCH, PUSH 1P-1TX1
SW1903	1AV4S10B0900J	SWITCH, PUSH 1P-1T
SW1903	1AV4S10B5650J	SWITCH, PUSH 1P-1TX1
SW1904	1AV4S10B0900J	SWITCH, PUSH 1P-1T
SW1904	1AV4S10B5650J	SWITCH, PUSH 1P-1TX1
SW1905	1AV4S10B0900J	SWITCH, PUSH 1P-1T
SW1905	1AV4S10B5650J	SWITCH, PUSH 1P-1TX1

CRYSTAL / FILTERS

X801	1AV4V10B0560N	OSC, CRYSTAL 32.768KHZ
X6200	1AV4F31B0540N	CERAMIC FILTER 4.5MHZ
X6201	1AV4V10B8280G	OSC, CRYSTAL 25.000MHZ

MISCELLANEOUS

A001	1AA0B10N23400	ASSY, PWB, MAIN-N4SE
A002	1AA0B10N22500	ASSY, PWB, CONTROL-N4SG
A1902	1AV4U20B99401	UNIT, REMOCON RECEIVER
△A6100	1AV4F1ZAZ0010	TUNER, USA/IF/DIGI-ANALOG
△EL901	1AV4T40B86900	LCD (T150XG01 V4)
SP901	1LB4A10B04600	SPEAKER, 8
SP901	1LB4A10B08100	SPEAKER, 8
SP902	1LB4A10B04600	SPEAKER, 8
SP902	1LB4A10B08100	SPEAKER, 8
△W901	1AV4W10B17900	CORD, POWER-2.0MK-VTR-02
△W901	1AV4W10B19800	CORD, POWER-2.0MK-VTR-02


Schematic Location	Part No.	Description
--------------------	----------	-------------

INVERTER / POWER BOARD

△U901 1AV4U20C09100 UNIT, INVERTER-POWER BRD

Non-servicable part. No discreet parts are supplied for this PC board.

CABINET PARTS LIST

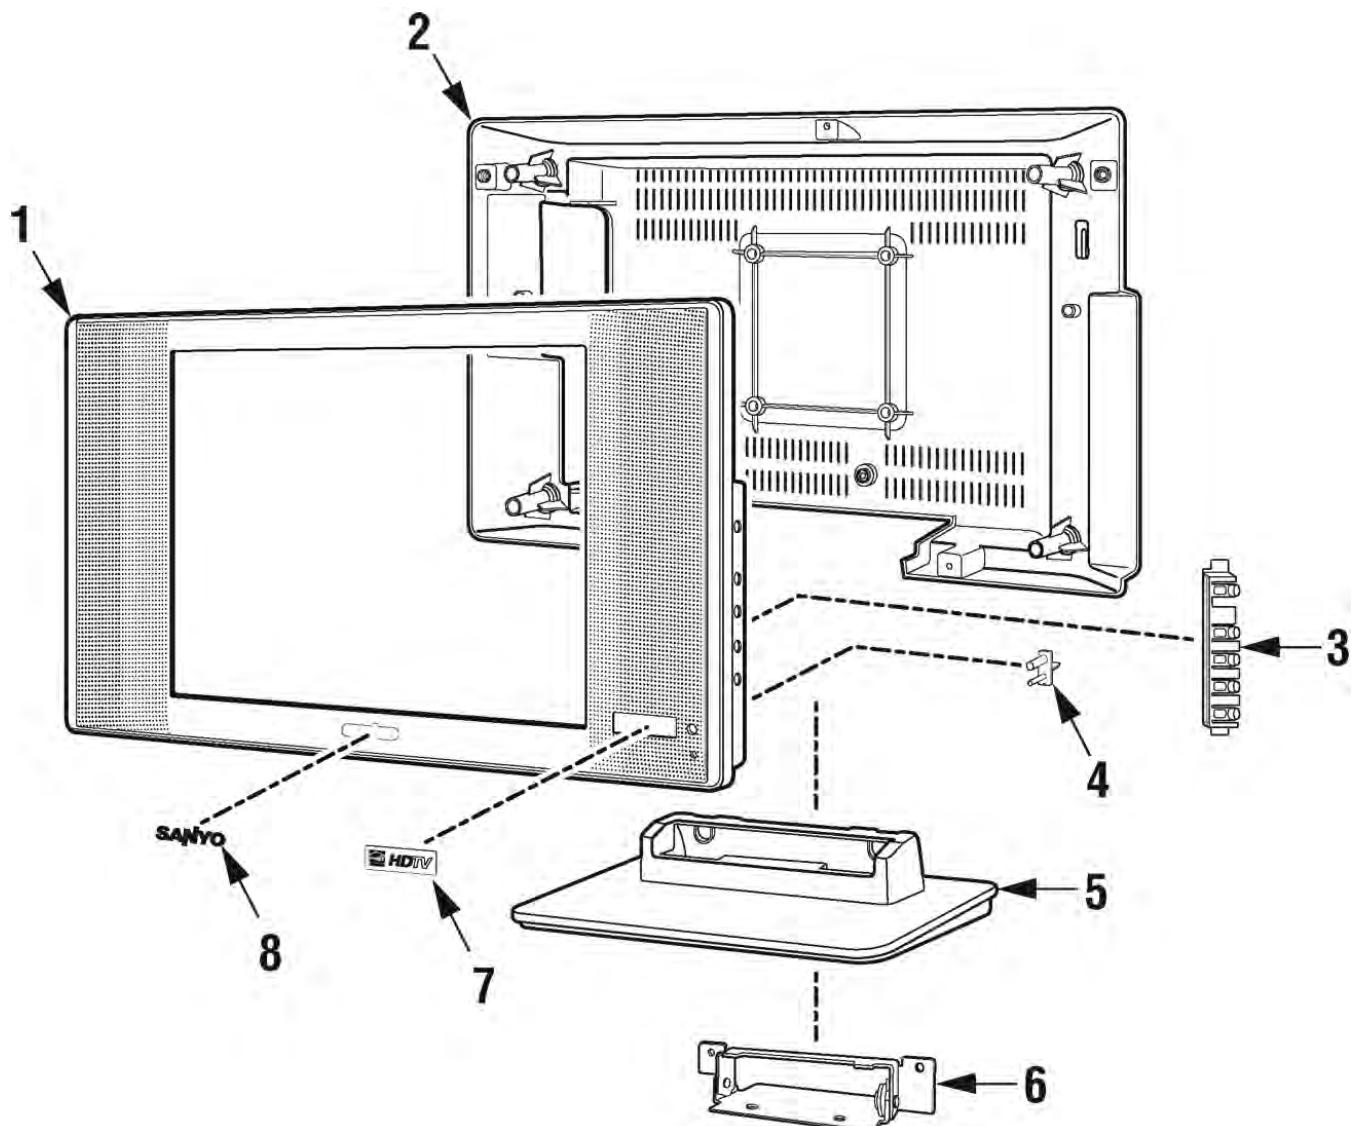

CABINET PARTS LIST


KEY NO.	PARTS NO.	DESCRIPTION
1	1AA2CAM0587-A	CABINET FRONT-N4SM
2	1AA2CBM0428--	CABINET BACK-N4SG
3	1AA2BUM0529-A	BUTTON UNITED-N4TK
4	1AA2DEM0444--	DEC IND
5	1AA2SDM0171-A	STAND COVER
6	1AA0HGF0015-A	ASSY HINGE
7	1AA2DES0915-A	DEC SHEET HDTV
8	1AV2BAAS014AA	BADGE, SANYO

ACCESSORY PARTS LIST


KEY NO.	PARTS NO.	DESCRIPTION
	1JC6P1P0291--	OWNER'S MANUAL (English)
	1JC6P1P0292--	OWNER'S MANUAL (Spanish)
	1JC6P1P0293--	OWNER'S MANUAL (French)
	1LB0U10B01802	ASSY, REMOCON
	1AA2RCM0305--	RC BATTERY LID

COMPONENT AND TESTPOINT LOCATIONS


MAIN BOARD PARTS SIDE

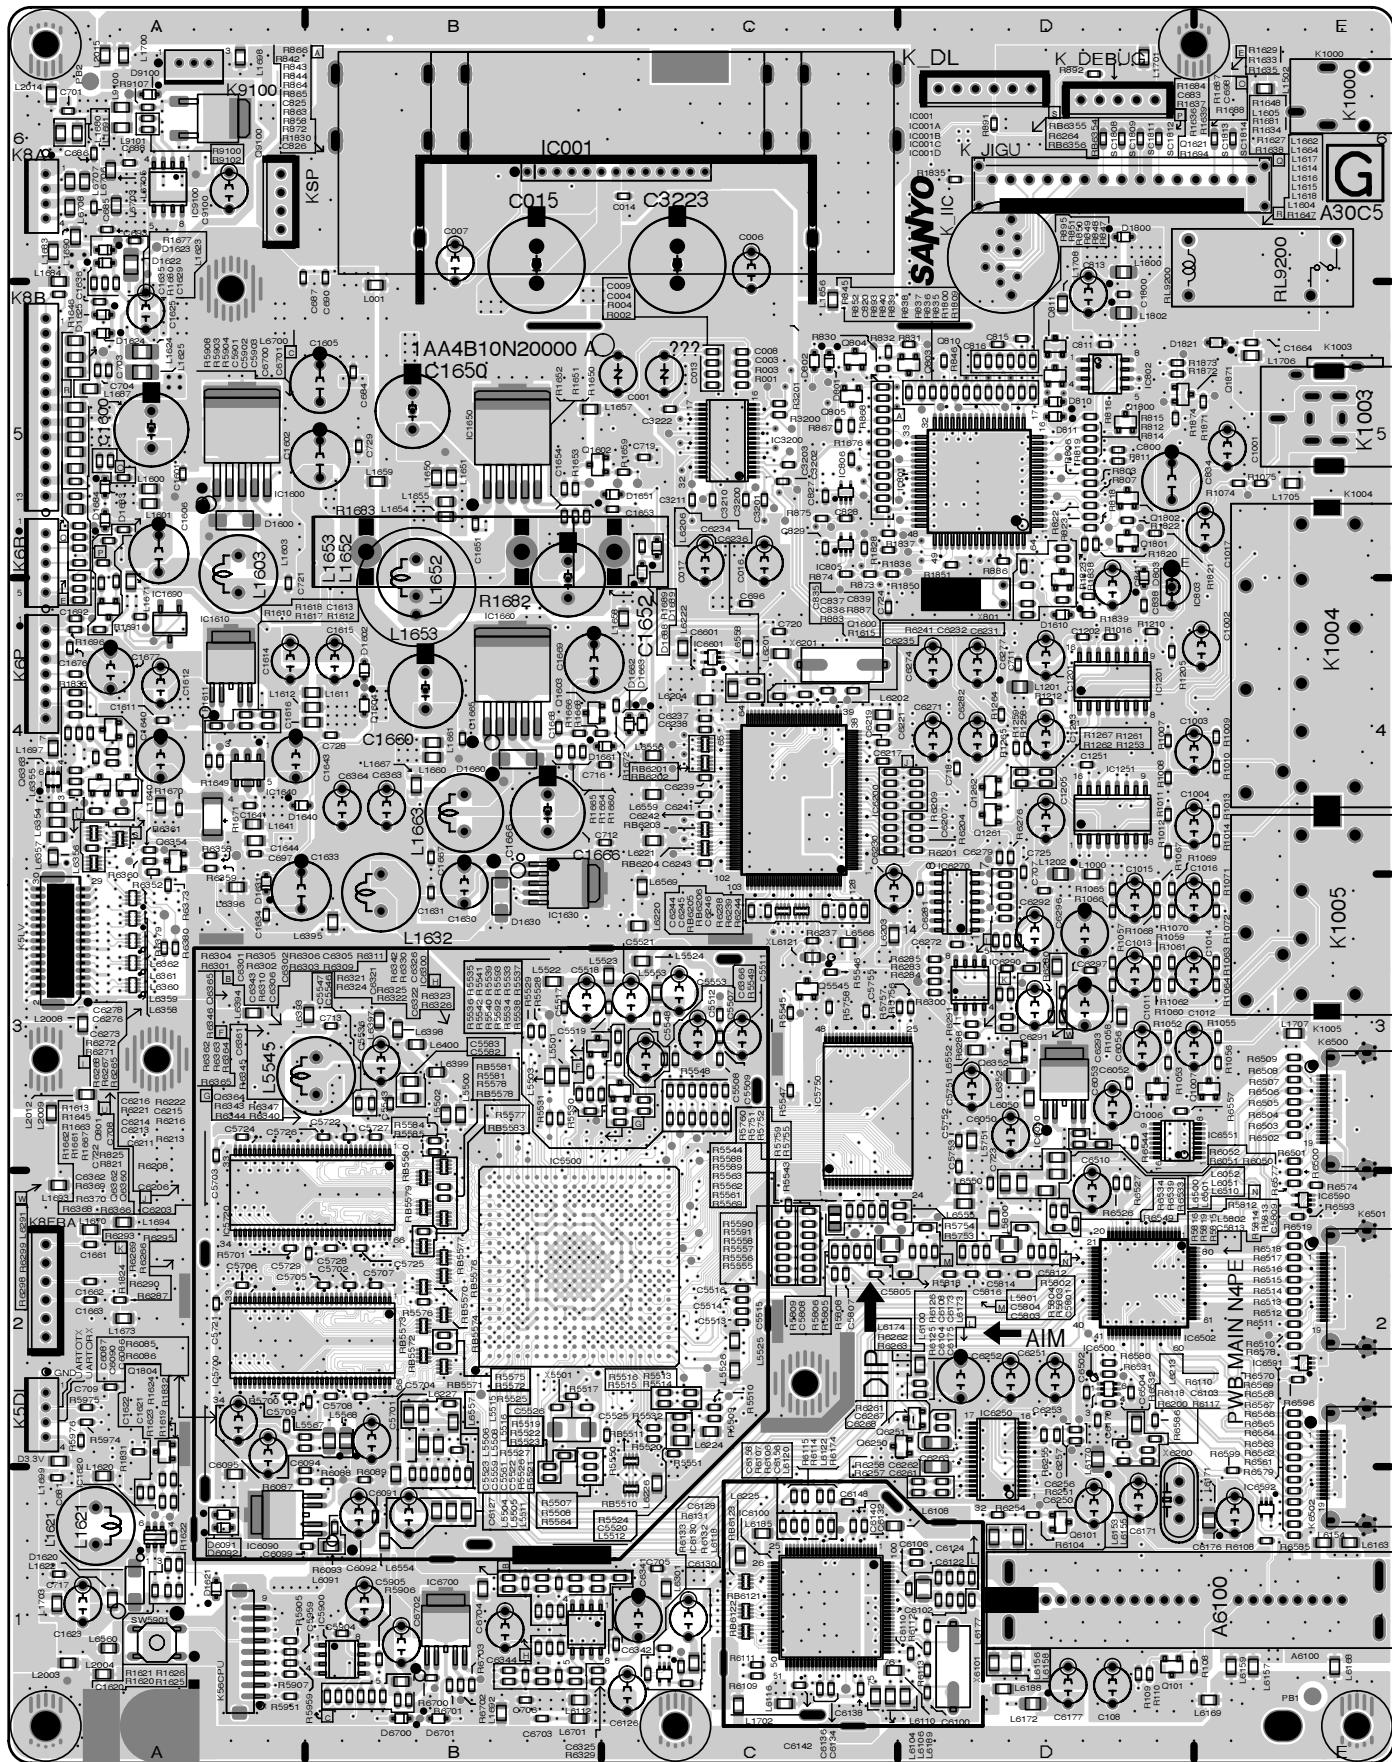


MAIN BOARD FOIL SIDE

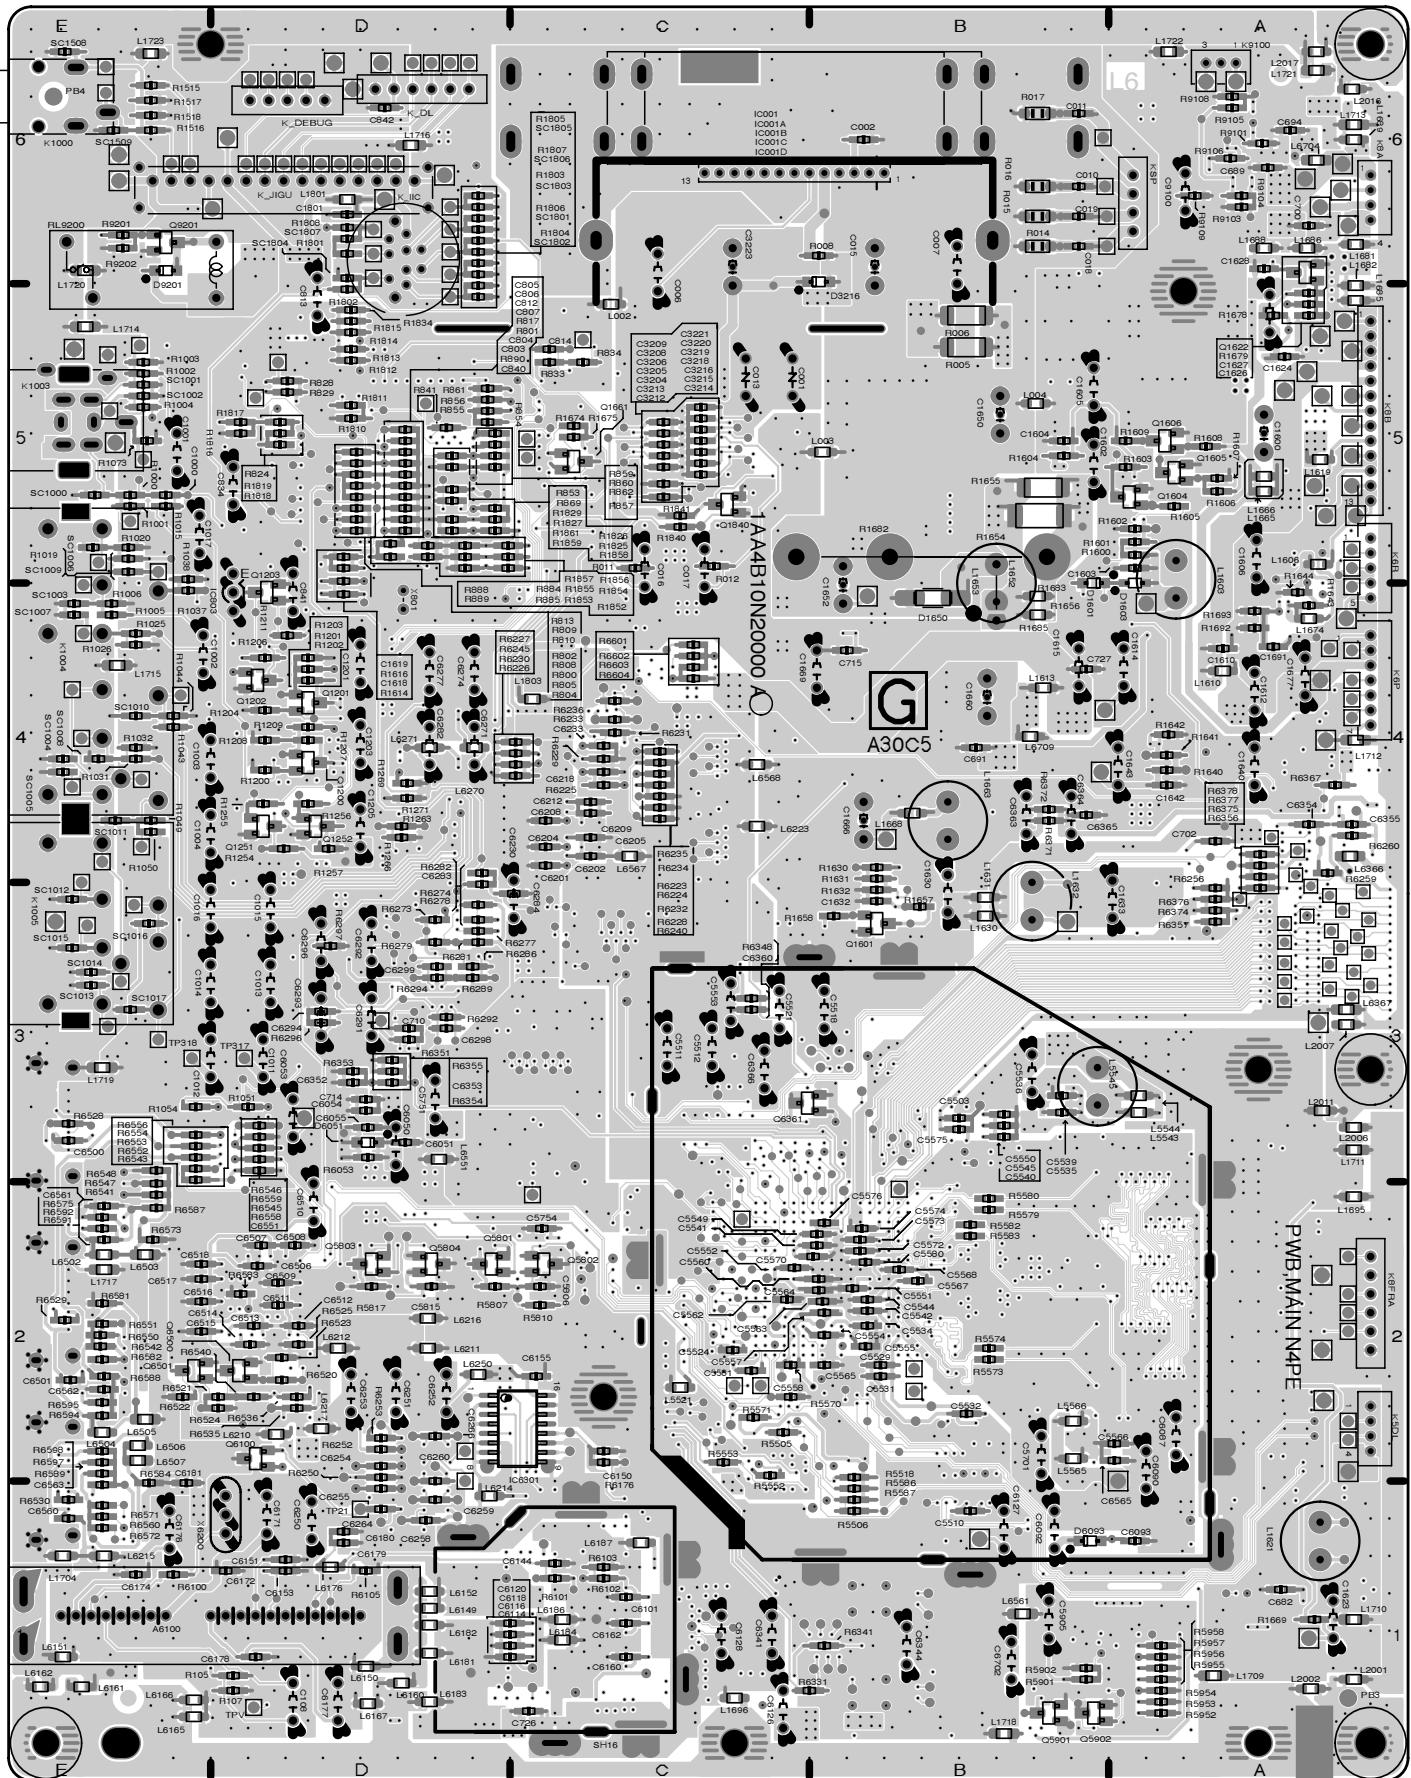

BLOCK DIAGRAM POWER LINES

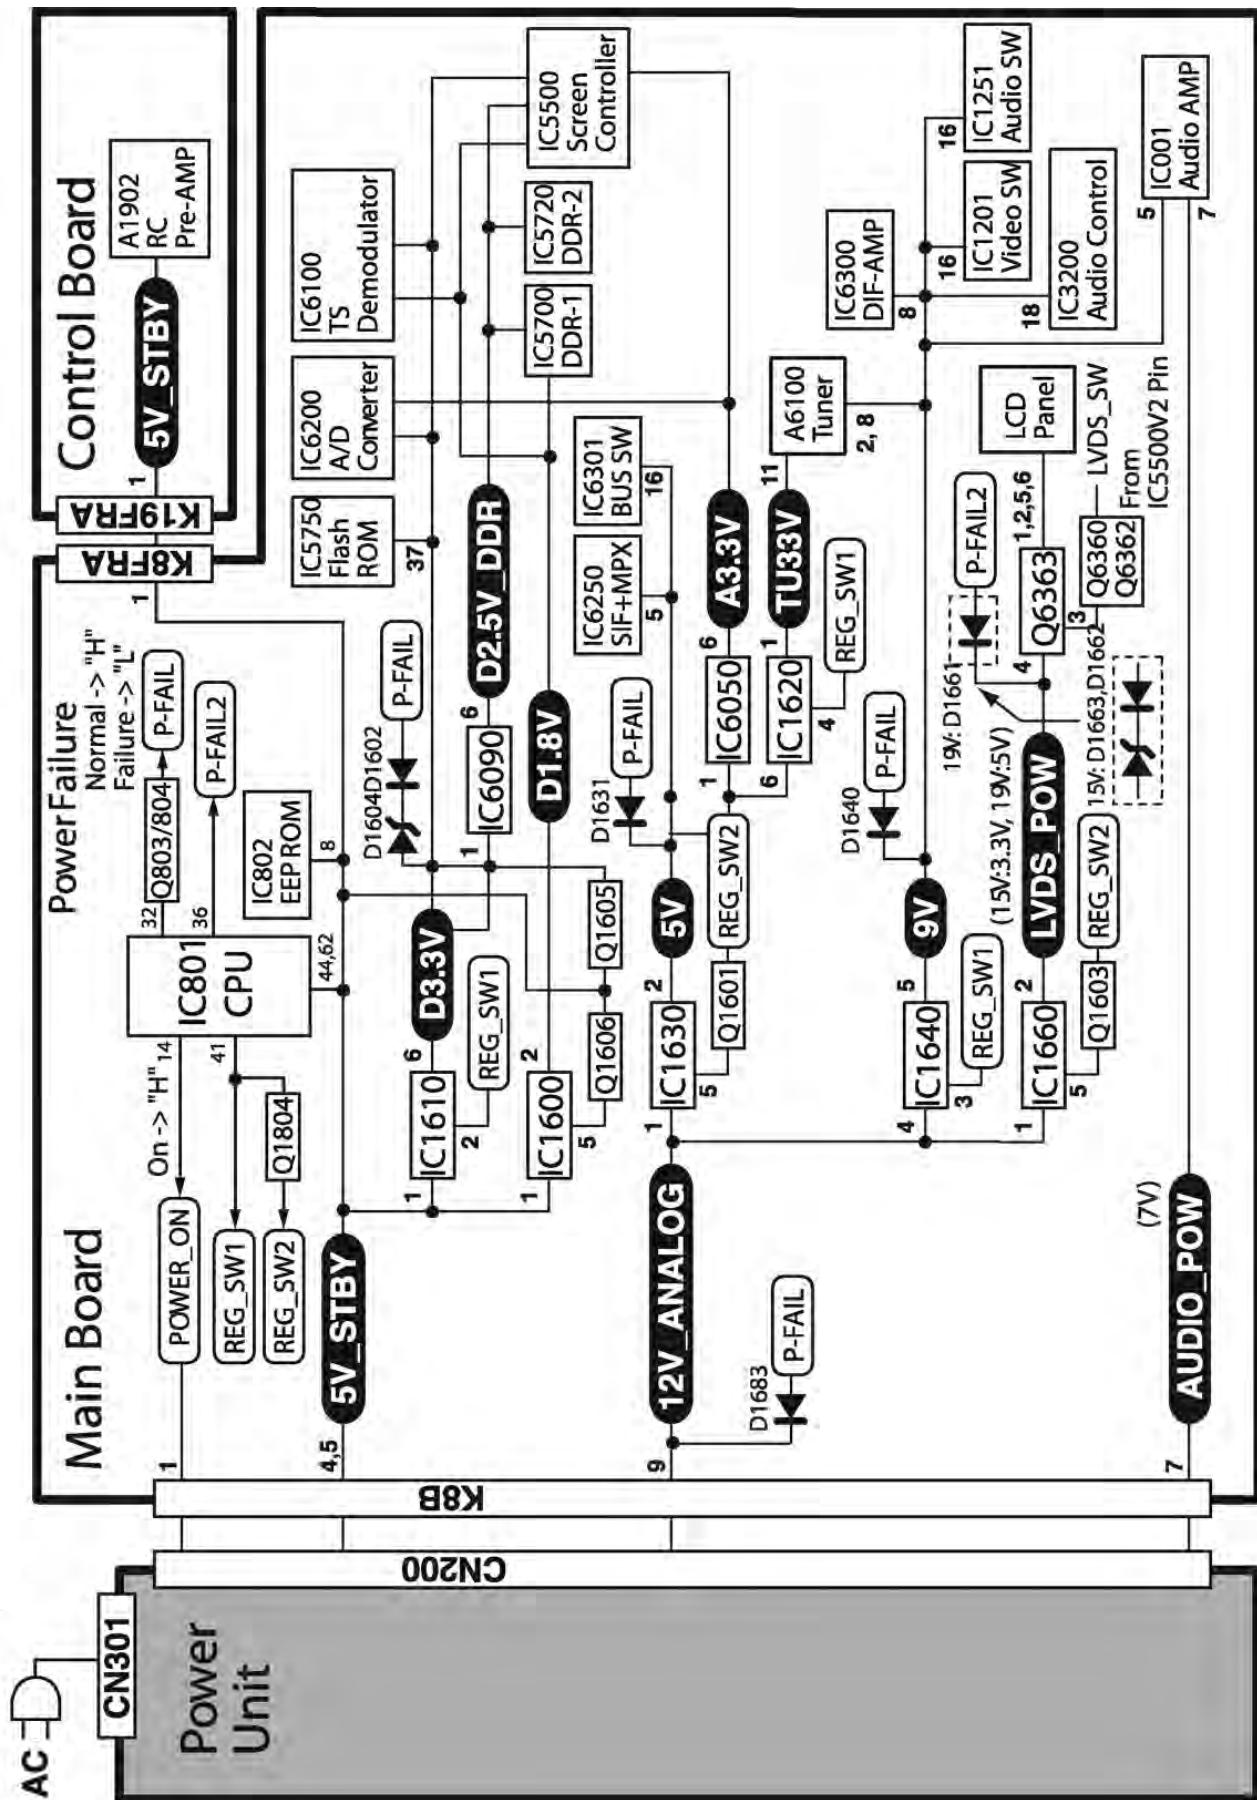


BLOCK DIAGRAM SIGNAL LINES

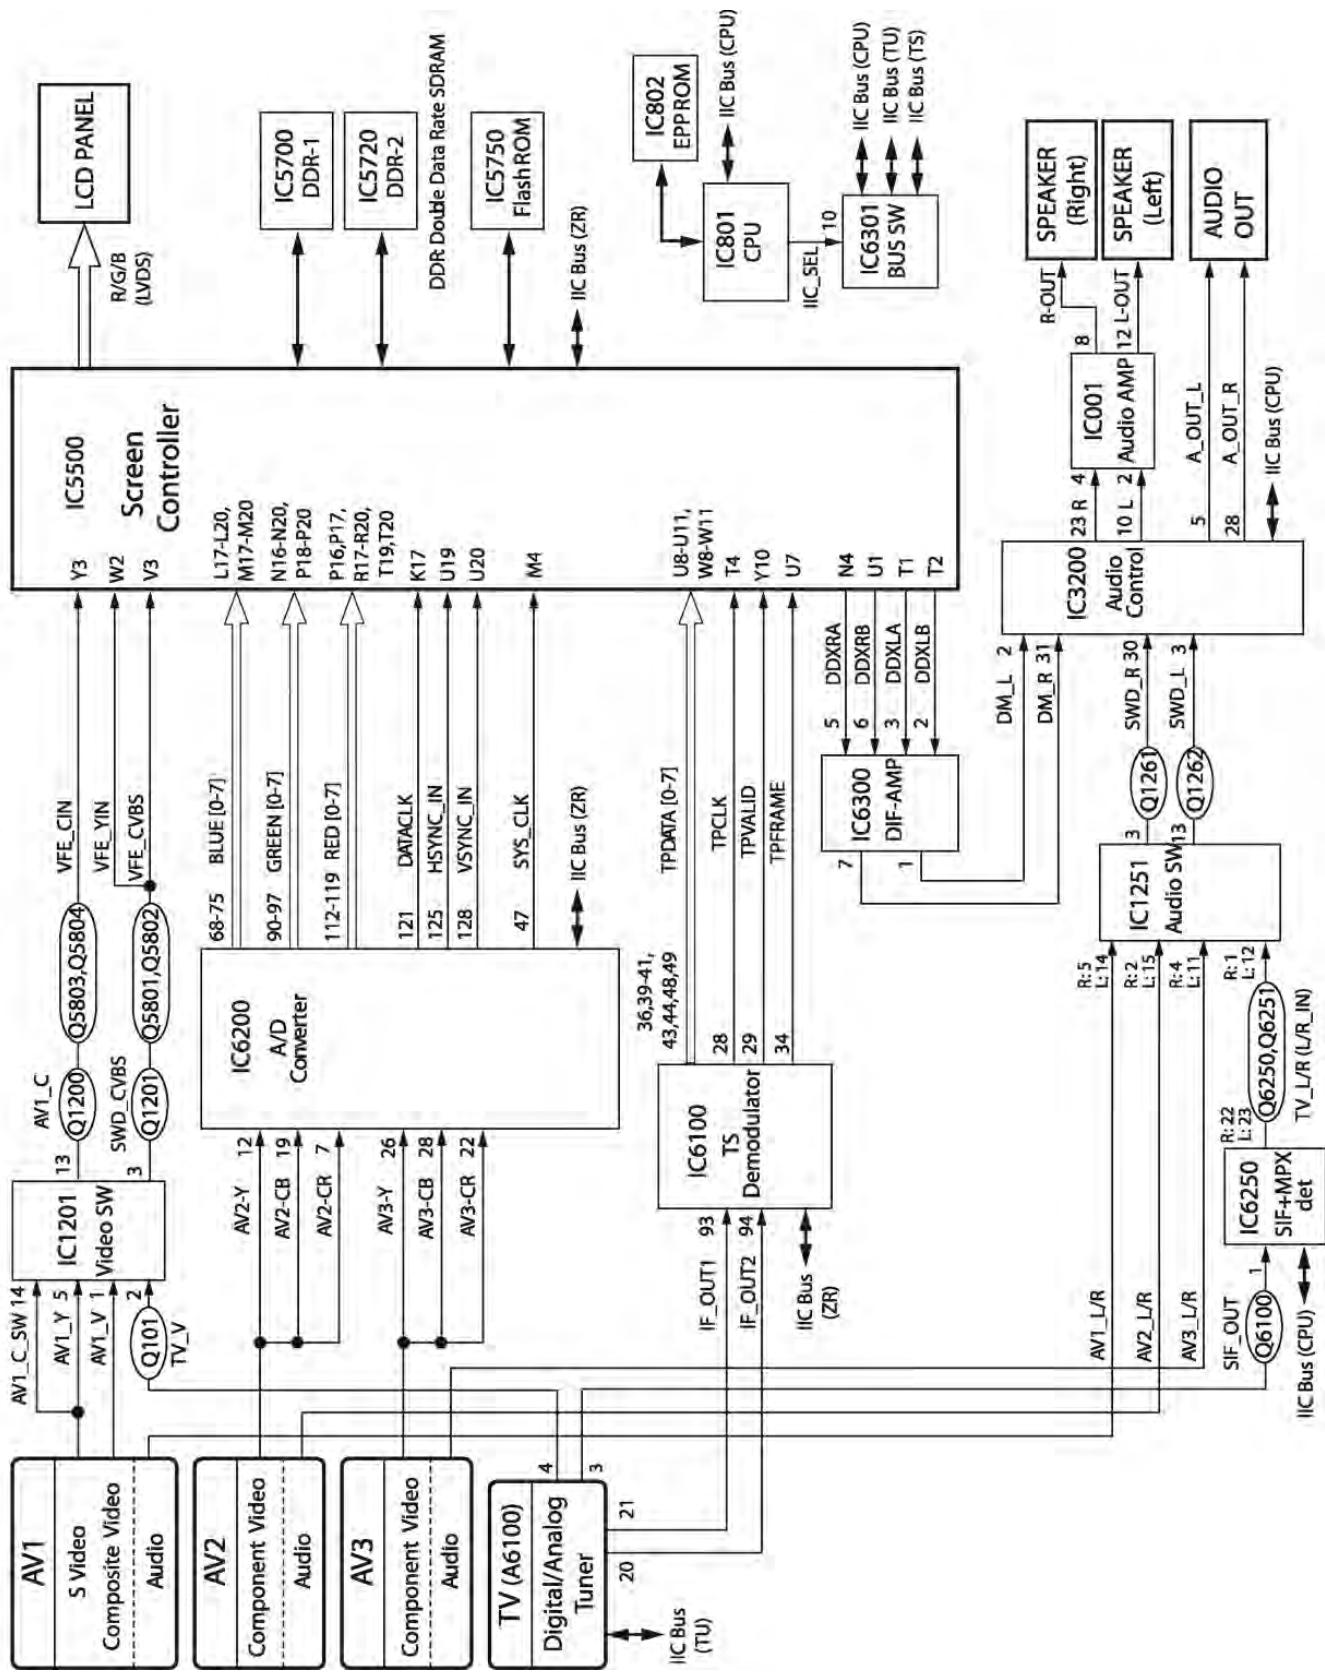


IC BLOCK DIAGRAMS


IC001, Audio AMP

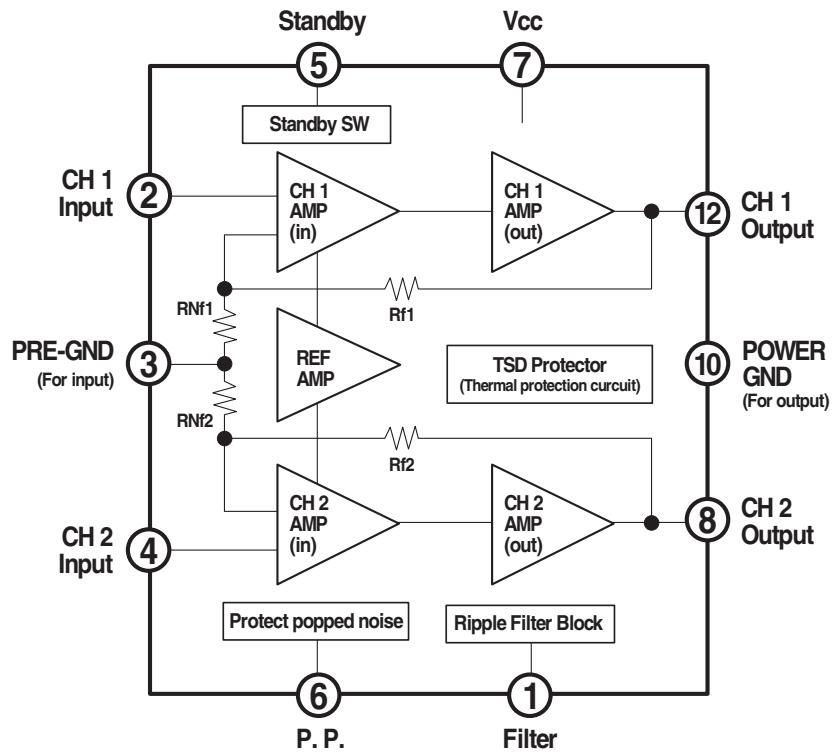


IC1201, IC1251 Video and Audio Select

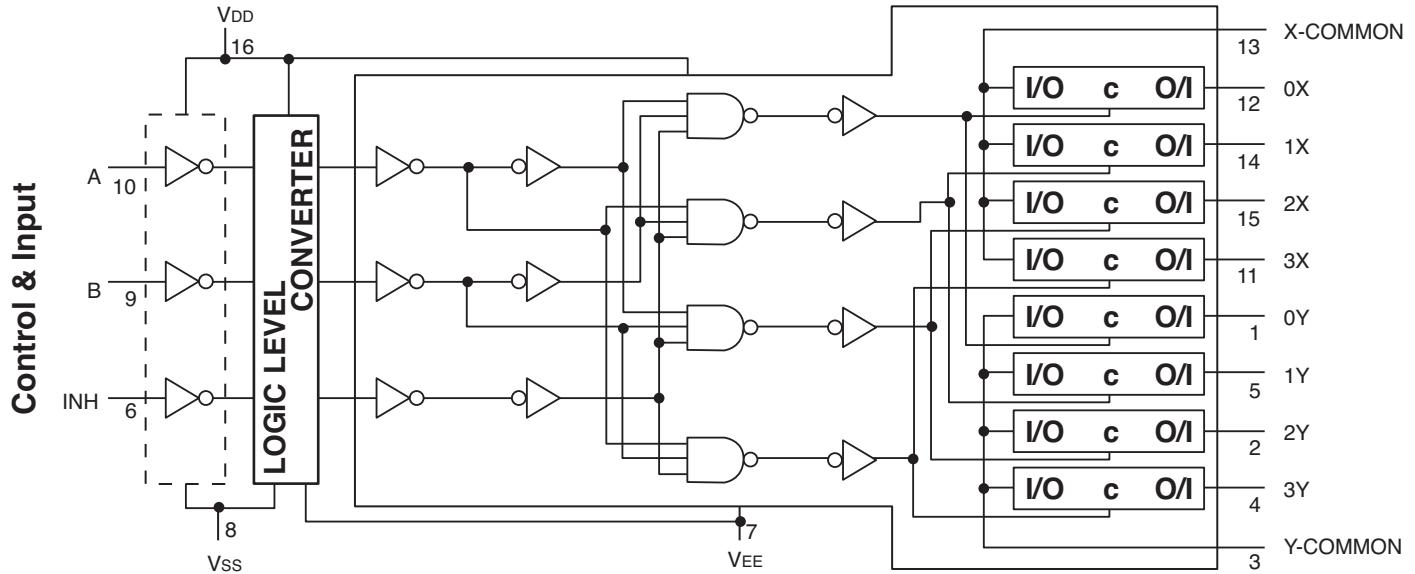

IC1600, DC to DC Converter

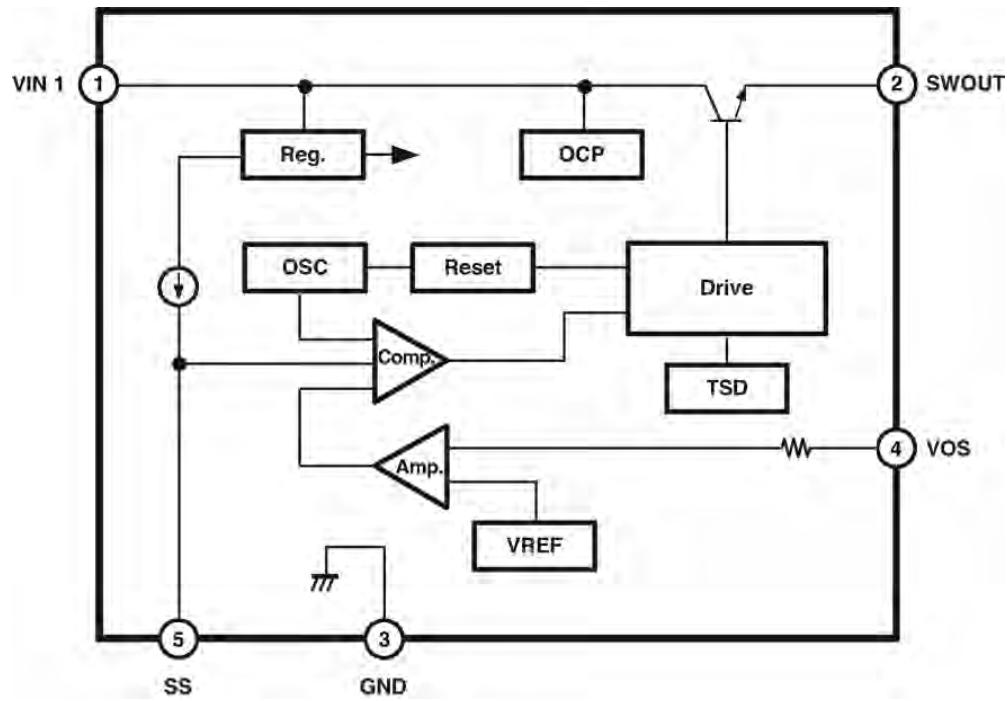


IC1620, DC to DC Converter

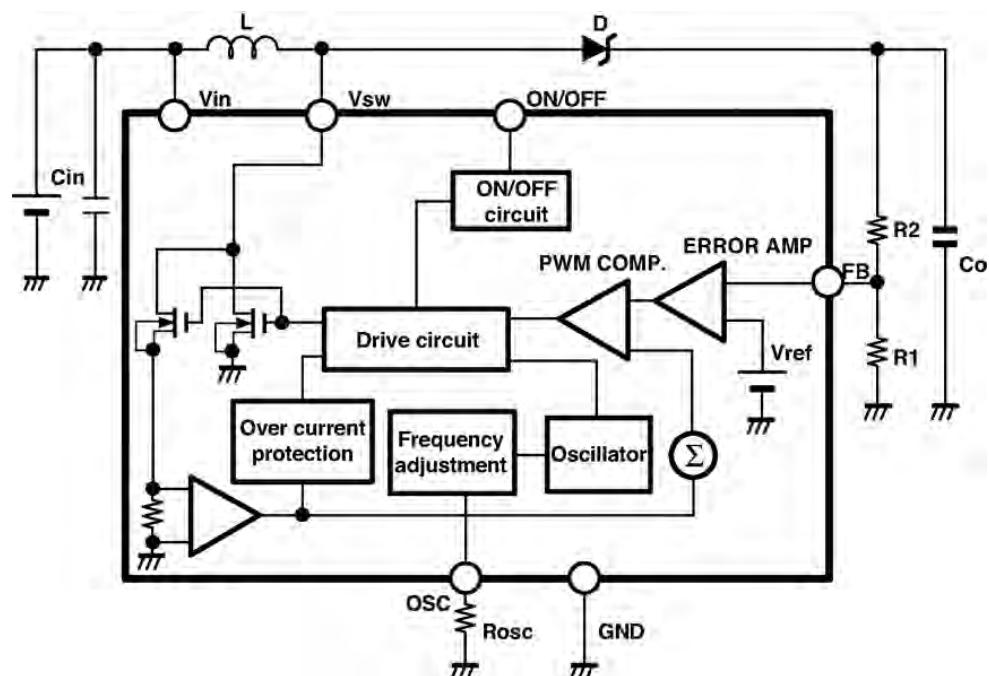


IC BLOCK DIAGRAMS (CONT.)


IC1630, DC to DC Converter

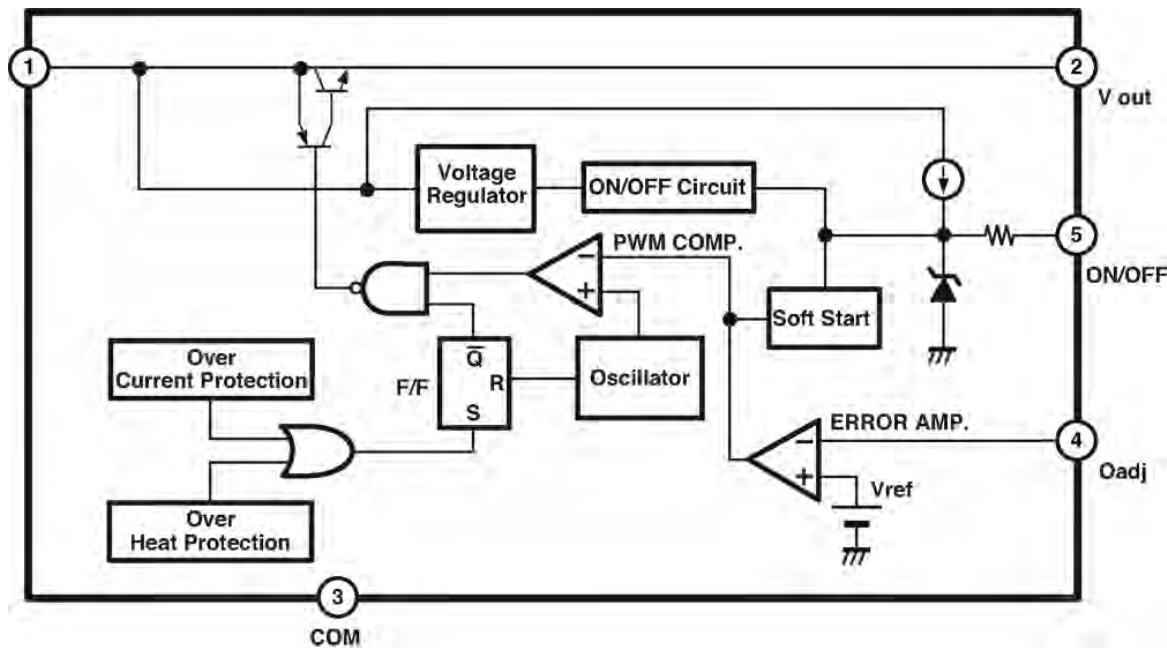

IC1640, DC to DC Converter

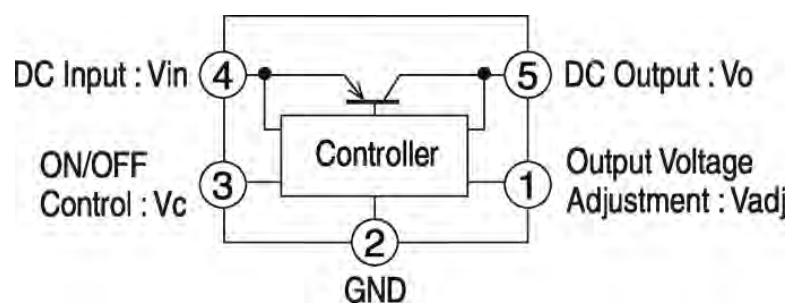


IC5500 Screen Controller

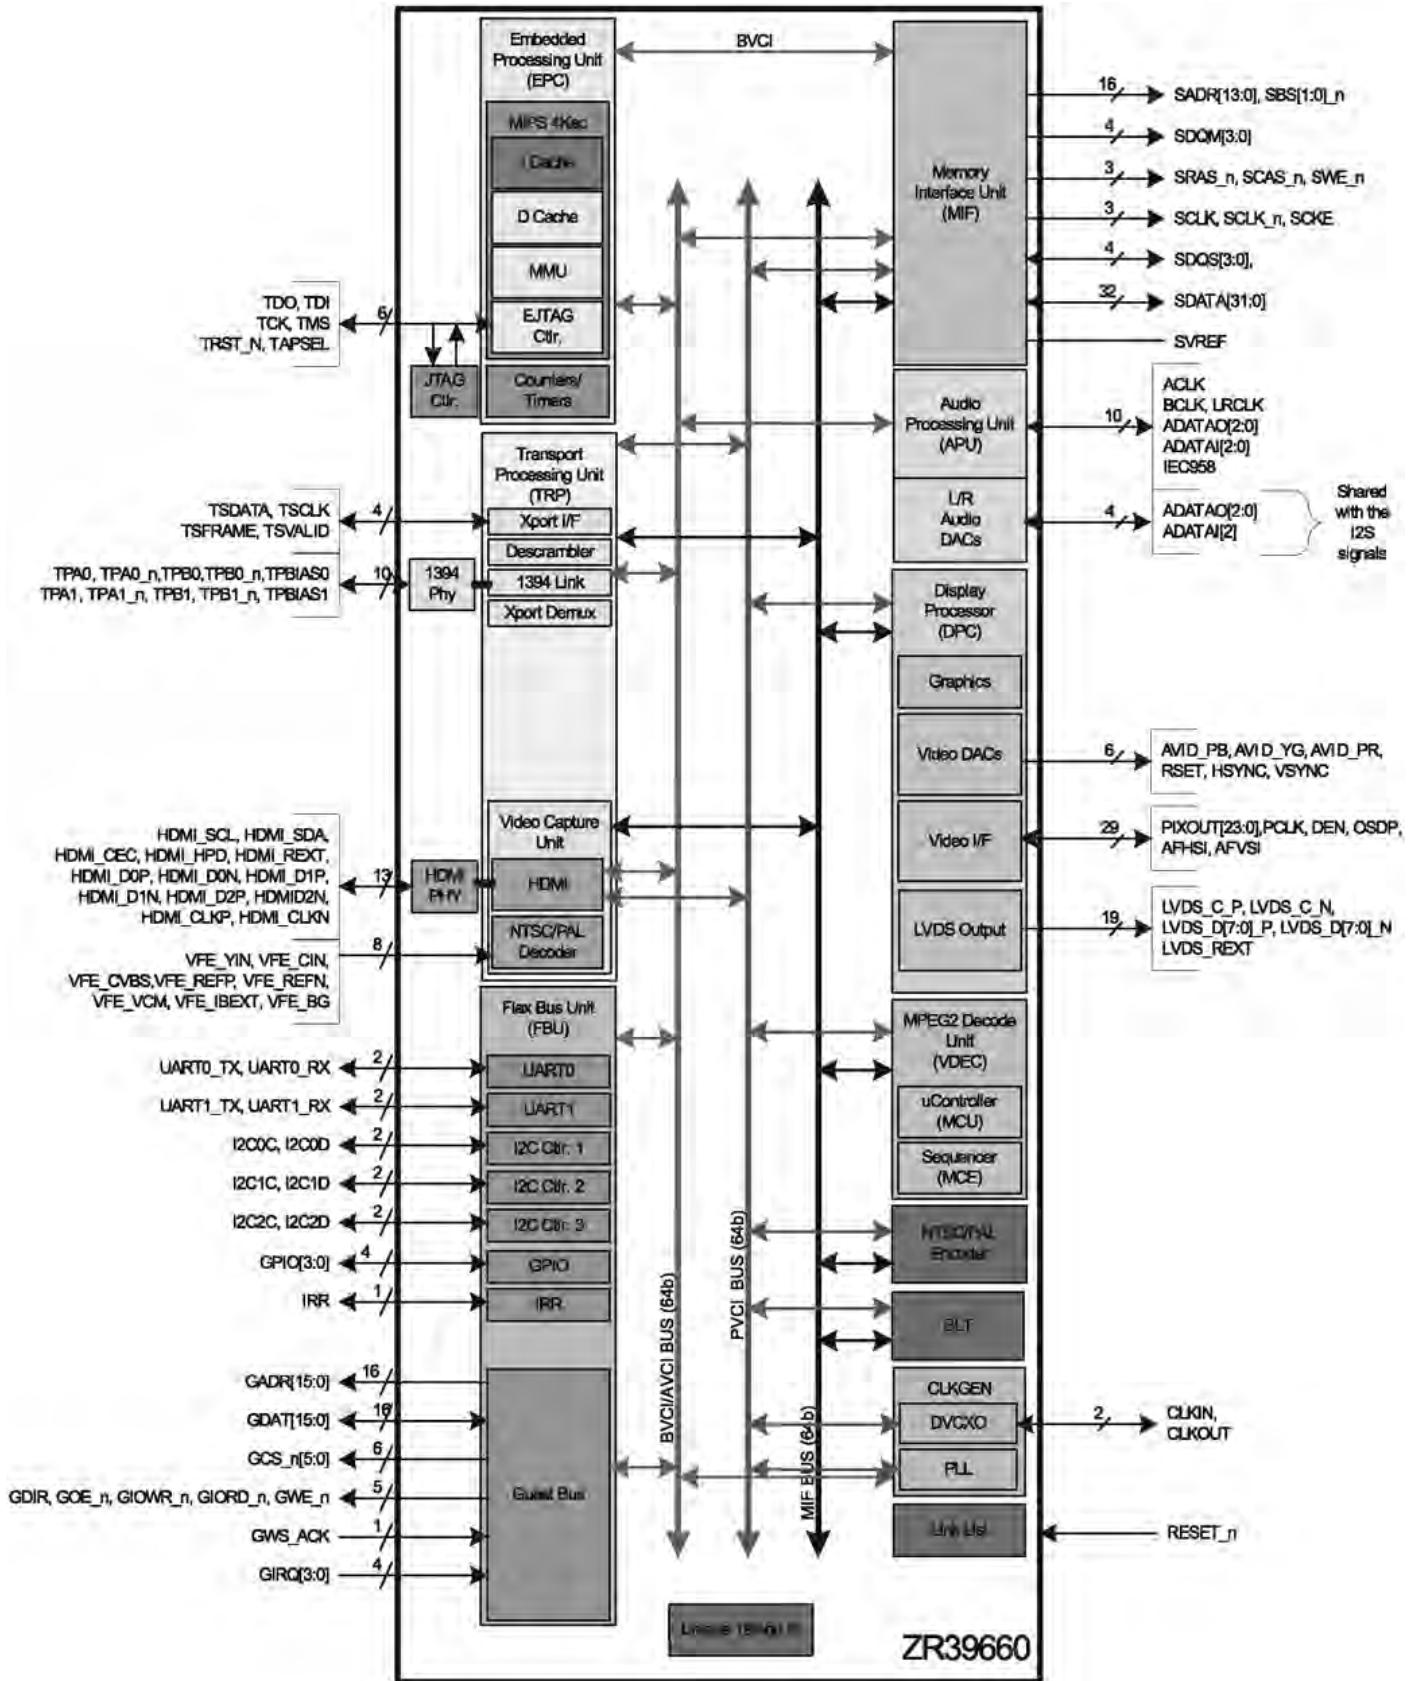


IC BLOCK DIAGRAMS (CONT.)


IC5700, IC5720 DDR: Double Data Rate SDRAM

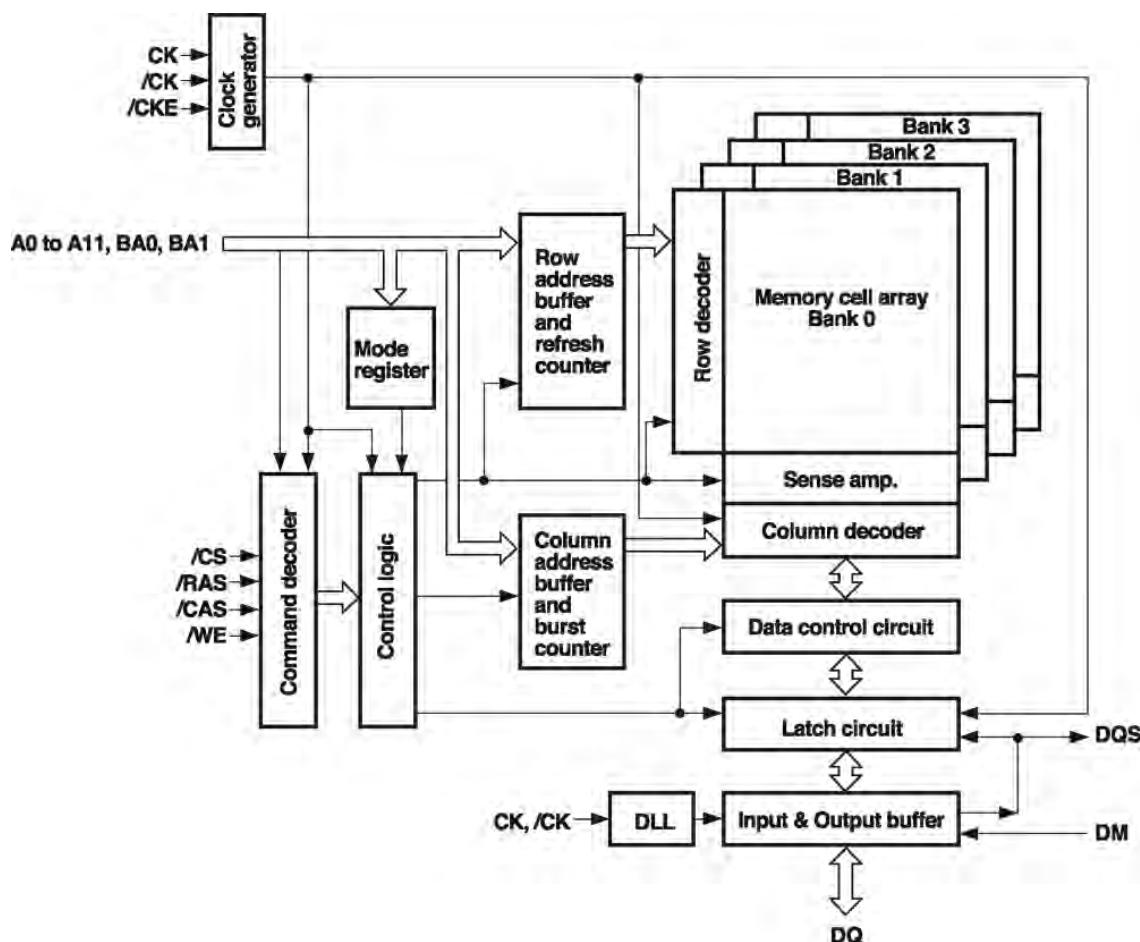

IC6100, TS Demodulator

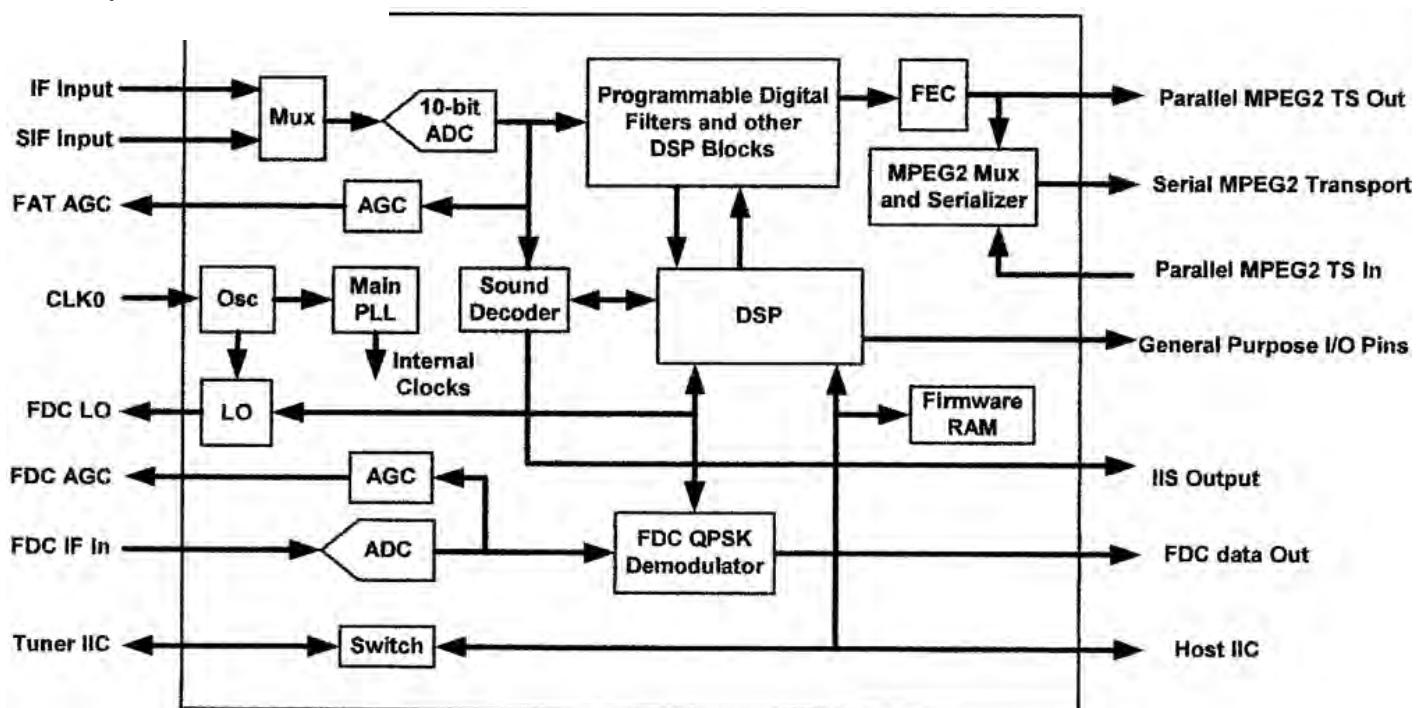


IC6200, A/D Converter

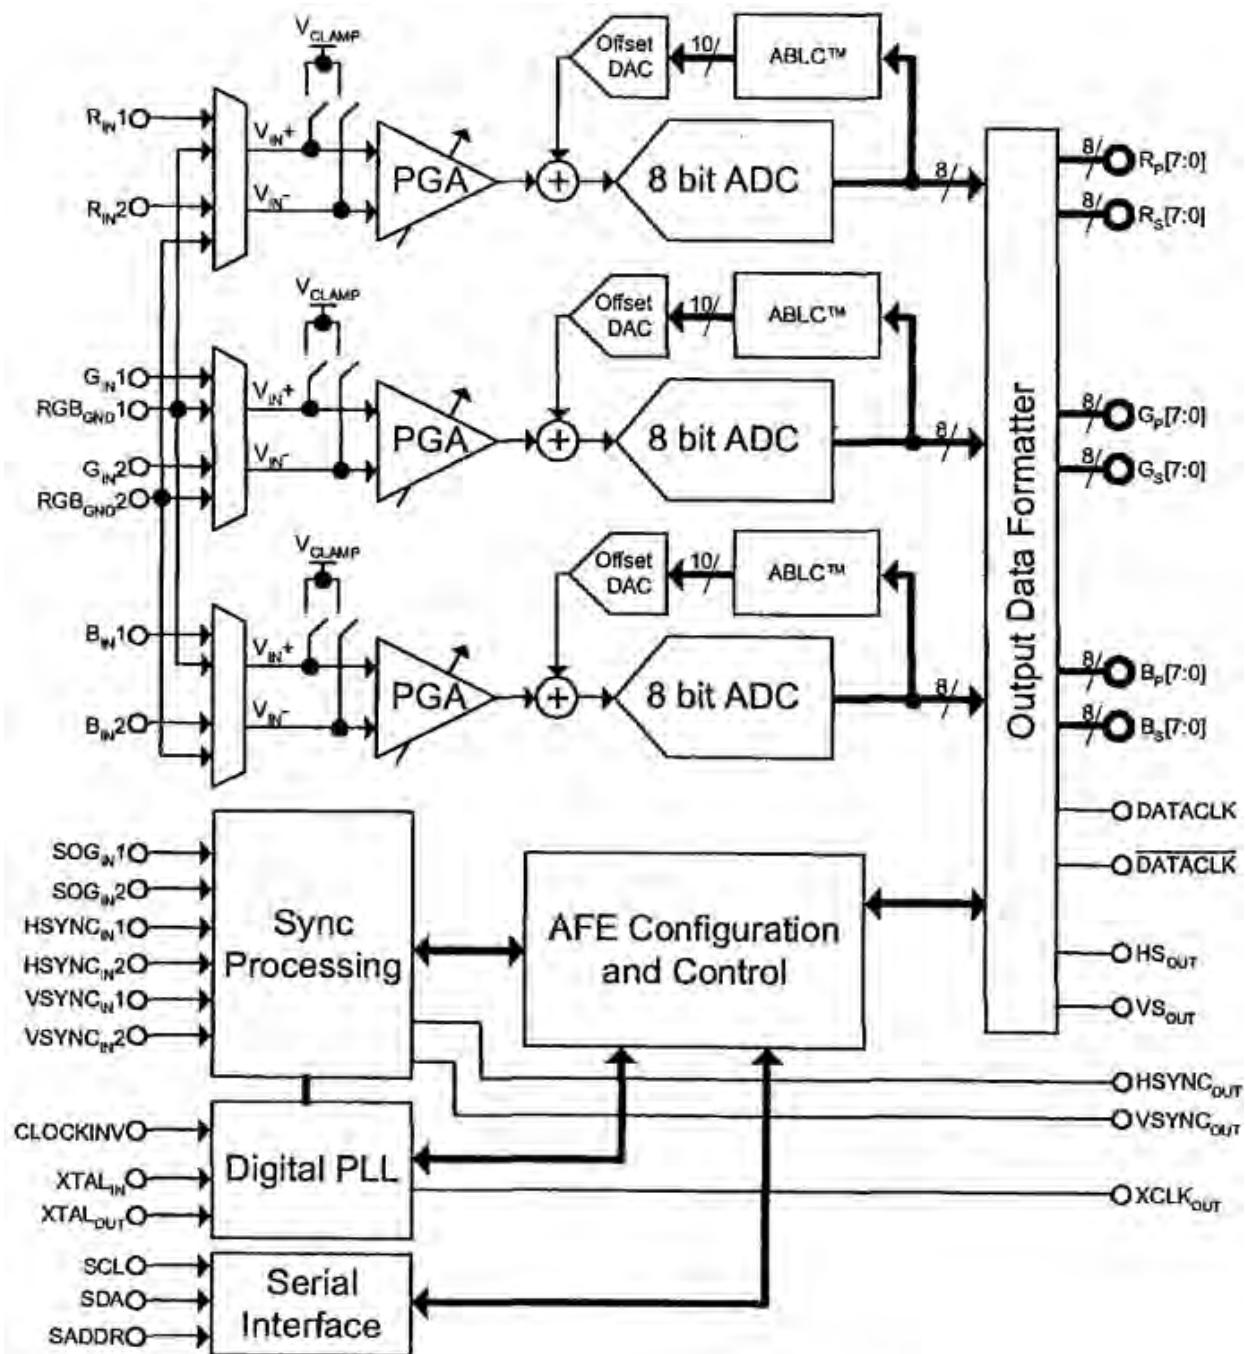


TROUBLESHOOTING FLOW CHARTS

NO POWER

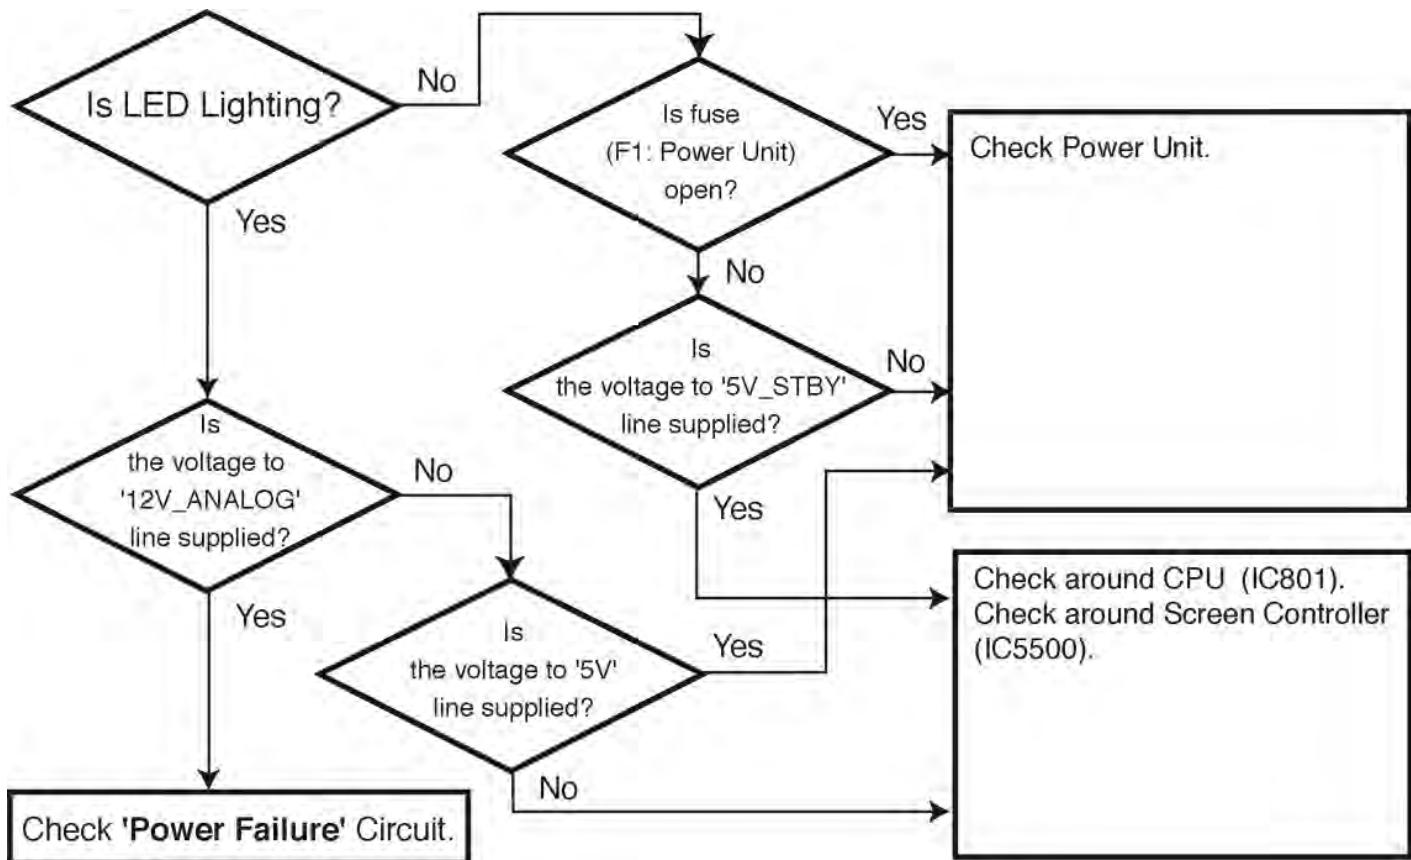


NO VIDEO

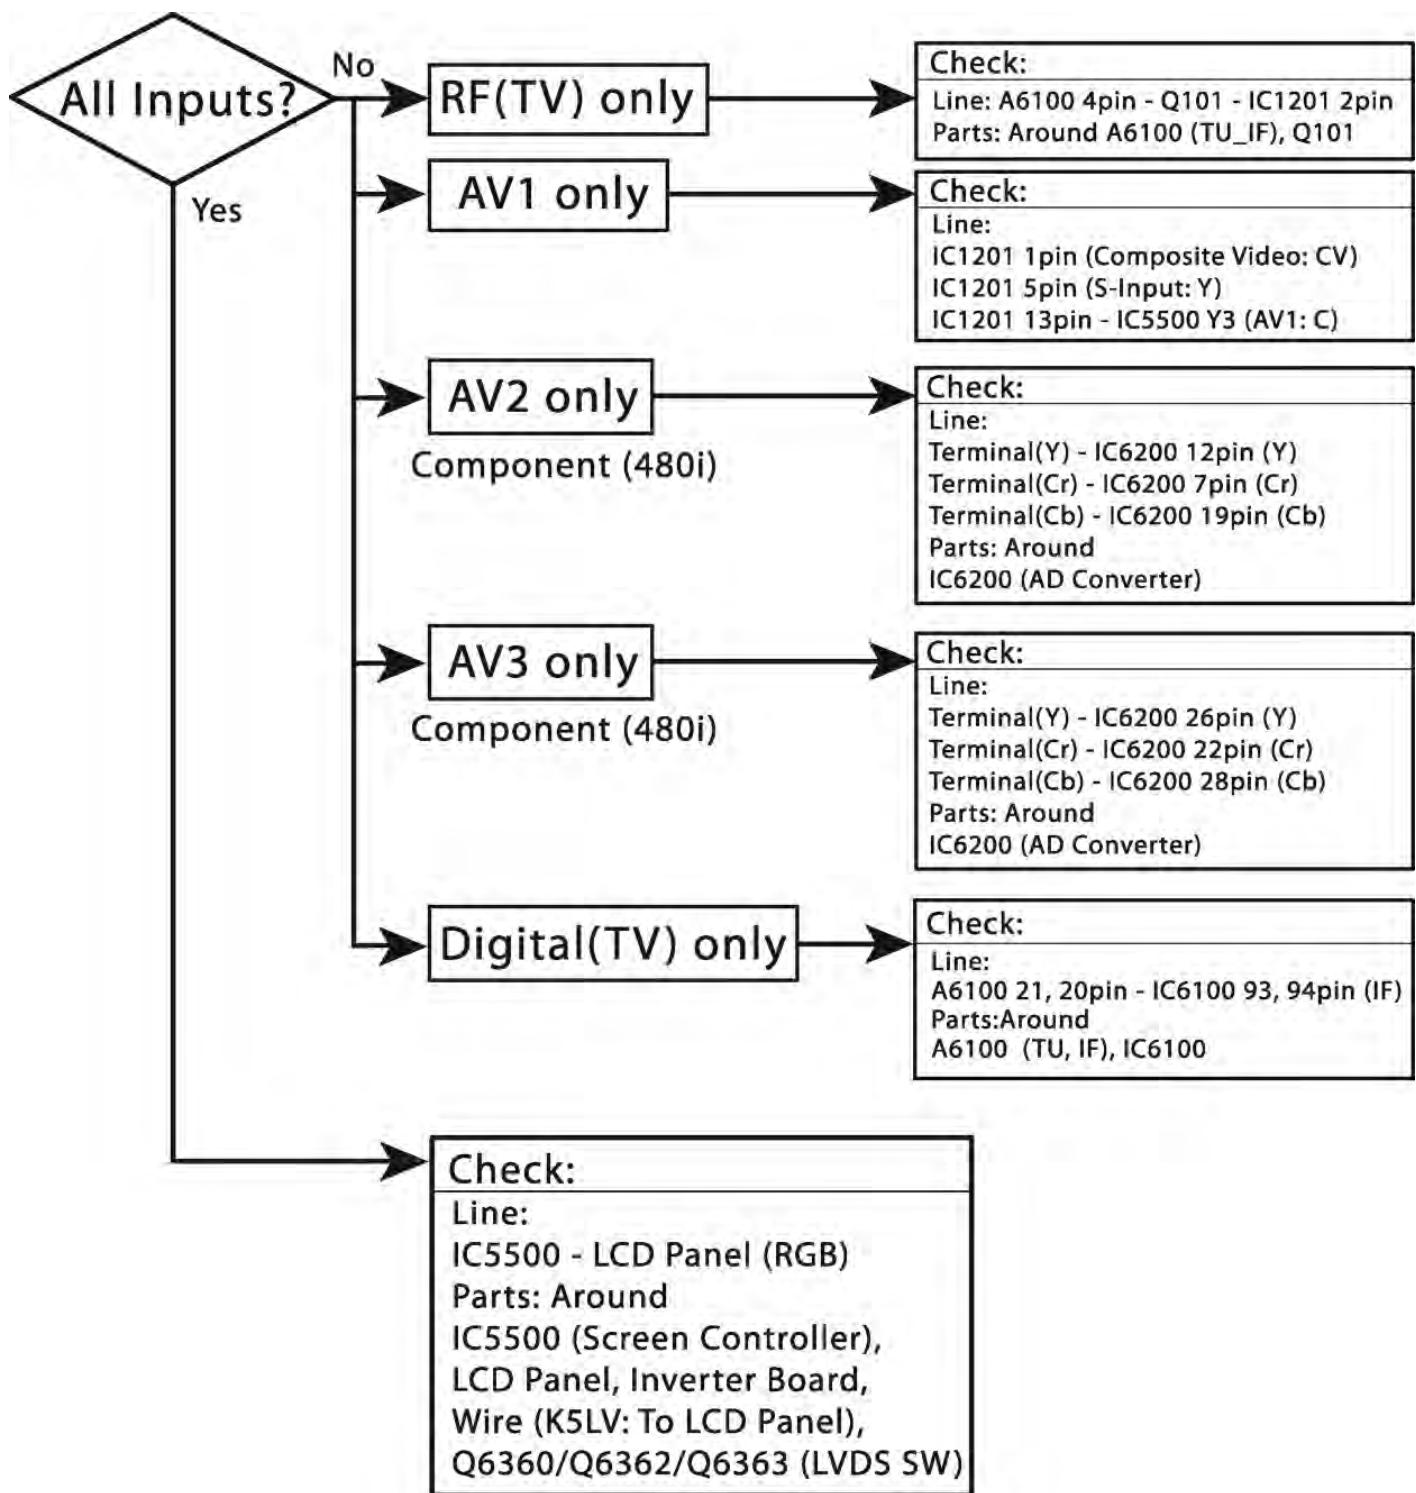

TROUBLESHOOTING FLOW CHARTS (CONT.)

NO AUDIO

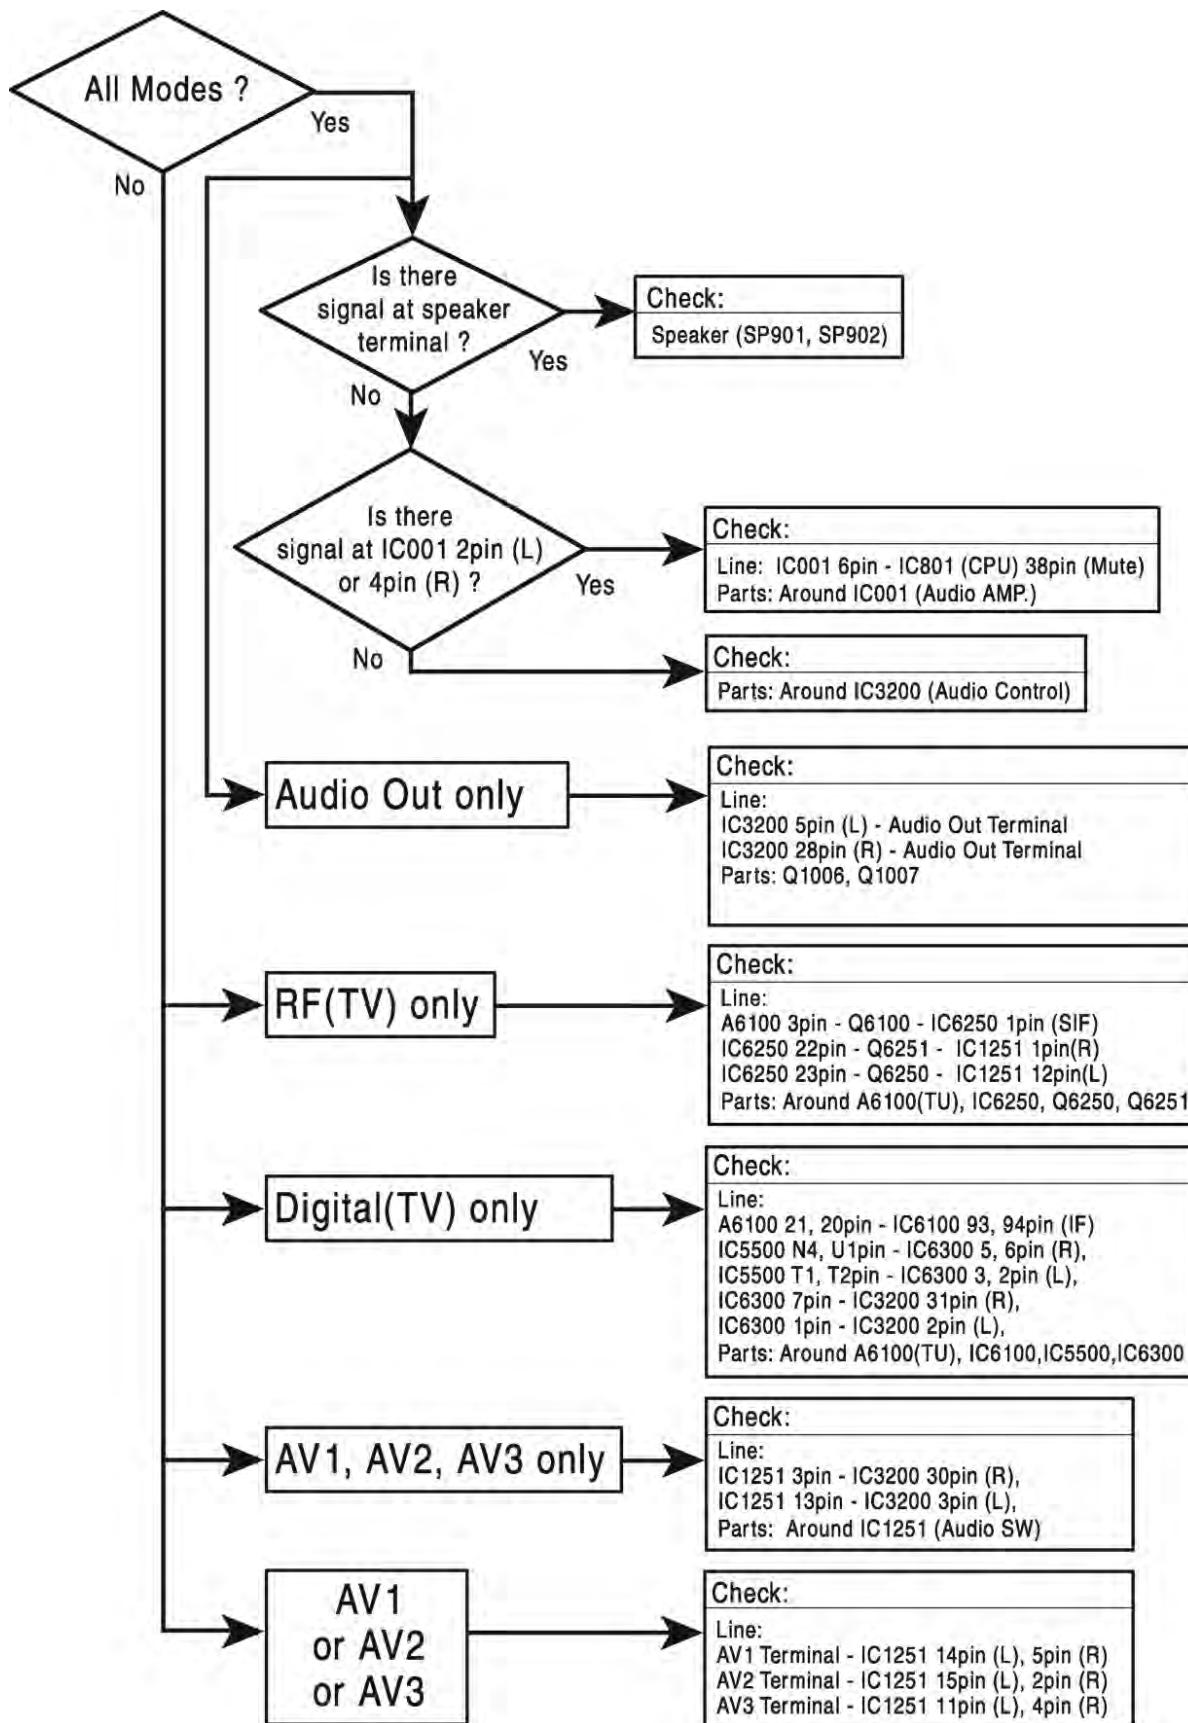

CONTROL PORT FUNCTIONS

System Control (CPU : IC801)

Pin	Name	Function	I/O	Description
1	CVin	NA	IN	GND (0Vdc)
2	P70/INT0/TOLCP	LINE OFF	IN	Detect AC Voltage Reduction (Normal: High)
3	P71/INT1/TOHCP	Reserve	OUT (Open)	
4	P72/INT2/TOIN	Display Enable	OUT	Display Enable for PDP
5	P73/INT3/TOIN	RC in	IN	RC Input
6	AN0	Key in	IN	Key Input
7	AN1	AFT S-Figure in	IN	AFT S-Figure Input
8	P82/AN2	Tuner SW	OUT	Tuner BUS-SW (Analog-RF: High, Other: Low)
9	P83	Reserve	OUT (Open)	
10	P84/AN4	Reserve	OUT (Open)	
11	P85/AN5	VS-ON	OUT	VS-ON (for PDP) ON: High, OFF: Low
12	P86/AN6	Panel Ready	IN	Panel Ready (for PDP) OK: High, NG: Low
13	P87/AN7	S IN	IN	S-Detect
14	P30/SO6	TV Relay out	OUT	POWER ON/OFF SW On: High, OFF: Low
15	SB6	IIC-BUS for NV	I/O (DATA)	Active 'L' for IIC data NV
16	SCK6	IIC-BUS for NV	OUT (CLOCK)	Active 'L' for IIC clock NV
17	SB6	IIC-BUS for TV	I/O (DATA)	Active 'L' for IIC data TV
18	SCK6	IIC-BUS for TV	OUT (CLOCK)	Active 'L' for IIC clock TV
19	DBGP0	DBGP0	I/O	Terminal for De-Bug 1
20	DBGP1	DBGP1	I/O	Terminal for De-Bug 2
21	DBGP2	DBGP2	IN	Terminal for De-Bug 3
22	PC0	ENA/DATA1	I/O	Writing on board (ENA/DATA1)
23	PC1	DATA0	I/O	Writing on board (DATA0)
24	PC2	CLK	IN	Writing on board (CLK)
25	PC3	TB in	IN	Detection for Video Signal (Time base: H)
26	PC4	Reserve	OUT (Open)	
27	P00	Reserve	OUT (Open)	
28	P01	AV SW1	OUT	Selection for AV Selector 1
29	P02	AV SW2	OUT	Selection for AV Selector 2
30	P03	AV SW3	OUT	Selection for AV Selector 3
31	P04	AV SW4	OUT	Selection for AV Selector 4
32	P05	Power Fail-1 in	IN	TV Power Error (Error: Low)
33	P06	STATUS in	IN	For factory use
34	P07	Ack out	OUT	For factory use
35	P20/SO1	5V Discharge	OUT	
36	P21/S11/SB1	Power Fail-2 in	IN	LVDS Power Error (Error: Low)
37	P22/SCK1	Monitor-Out Mute	OUT	Mute ON: Low, OFF, High
38	P23	Audio MUTE	OUT	Audio Mute ON: High, OFF: Low
39	UTX	UART OUT	OUT	Digital Module microcomputer piece confidence
40	URX	UART IN	IN	Digital Module microcomputer piece confidence
41	P26/OSDCK1	REG SW	OUT	REG ON/OFF SW ON: High, OFF:Low
42	BL2	Reserve	OUT (Open)	
43	VSS2	Vss	IN	GND (0Vdc)
44	VDD2	Power IN	IN	5V (5Vdc±10%)
45	P10/SO0	Reserve	OUT (Open)	
46	P11/SI0/SB0	Reserve	OUT (Open)	

CONTROL PORT FUNCTIONS (Cont.)

System Control (CPU : IC801 Cont.)

Pin	Name	Function	I/O	Description
47	P12/SCK0	PDP/LCD	IN	Option Setting (PDP: High, LCD: Low)
48	P13	Panel Size 3	IN	Panel Size
49	P14	Panel Size 2	IN	Panel Size
50	P15	Panel Size 1	IN	Panel Size
51	P16	Panel Size 0	IN	Panel Size
52	P17	Reserve	IN	(Open)
53	BL1	NA	OUT	(Open)
54	B	NA	OUT	(Open)
55	G	NA	OUT	(Open)
56	R	NA	OUT	(Open)
57	HSB	Hsync	IN	GND (0Vdc)
58	VSB	Vsync	IN	GND (0Vdc)
59	VSS1	Vss	IN	GND (0Vdc)
60	XT1	Xin	IN	Main Clock IN/OUT Fosc=8MHz
61	XT2	Xout	OUT	(Should be connected between IN/OUT pins.)
62	VDD1	Power IN	IN	5V (5Vdc±10%)
63	RESB	RESET in	IN	Reset terminal
64	FILT	FILT out	OUT	PLL Filter

Mode Switching Table

Mode	AVSW1 (pin28)	AVSW2 (pin29)	AVSW3 (pin30)
Analog Tuner	Low	High	Low
AV1(CVBS)	High	High	Low
AV1(S)	High	Low	Low
AV2(Component 2)	Low	Low	High
AV3(Component 3)	Low	Low	Low
Digital Tuner or HDMI	Low	Low	Low
HDMI (DVI)	Low	Low	Low

SCHEMATIC DIAGRAMS

NOTES ON SCHEMATIC DIAGRAMS

1. All resistance values in ohms K=1,000 M=1,000,000.
2. Resistors specified with resistance value are "1/6DJ."
3. Resistors specified with type of resistor, tolerance and resistance value are "1/4."
4. Unless otherwise noted on schematic, all capacitor values less than 1 are expressed in μF (Micro Farad), and the values more than 1 are in pF.
5. All capacitors are 50 WV rating unless otherwise noted.
6. Unless otherwise noted on schematic, voltage reading taken with VOM from point indicated to chassis ground. Voltage reading taken using color-bar signal VHF channel 5, all controls at normal. Line voltage at 120 volts. Some voltages may vary with signal strength.
7. Waveforms were taken with color-bar signal and controls set for normal picture. Waveforms marked with an * may vary with signal strength.
8. The Symbol  indicates a fusible resistor, which protects the circuit from possible short circuits.
9. Parts enclosed with  are related with X-radiation.
10. Isolation border line. Cold Side  Hot Side

11. Schematic part location numbers may not always match the schematic symbols.
The schematic symbols and part descriptions are correct and should be used.
The part descriptions will be listed under the location number in the parts list.



ELECTROSTATICALLY SENSITIVE DEVICES

Many solid-state devices (especially Integrated Circuits) are Electrostatically Sensitive, and, therefore, require special handling techniques as described under "Servicing Electrostatically Sensitive Devices," on page two in this service literature.

SERVICE NOTES:



1. When replacing parts on circuit boards, clamp the lead wires to terminals before soldering.
2. When replacing high wattage resistors on circuit board, keep the resistor body 10 mm (3/8) from circuit board.
3. Keep wires away from high voltage and high temperature components.

PRODUCT SAFETY NOTICE


THE COMPONENTS DESIGNATED BY A  ON THIS SCHEMATIC DIAGRAM DESIGNATE COMPONENTS WHOSE VALUES ARE OF SPECIAL SIGNIFICANCE TO PRODUCT SAFETY. SHOULD ANY COMPONENT DESIGNATED BY A  NEED TO BE REPLACED, USE ONLY THE PART DESIGNATED IN THE PARTS LIST. DO NOT DEVIATE FROM THE RESISTANCE, WATTAGE AND VOLTAGE RATINGS SHOWN.

IC, DIODE, AND TRANSISTOR PIN LAYOUTS


INTEGRATED CIRCUITS

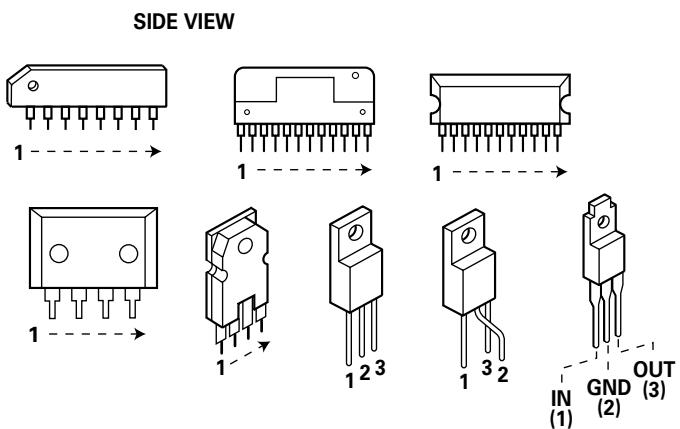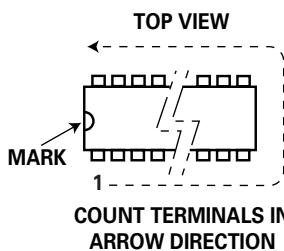


TRANSISTORS

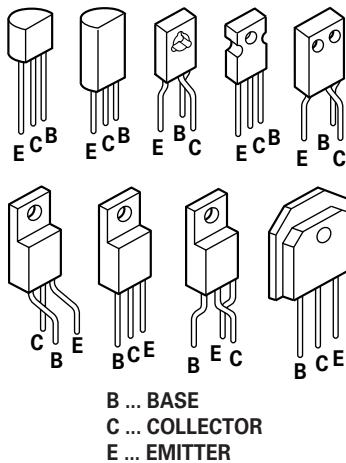


DIODES

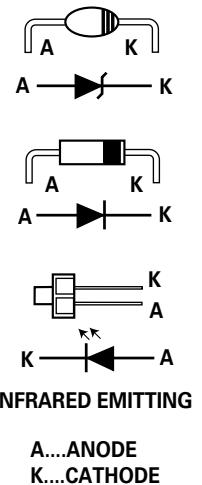


CHIP TRANSISTORS

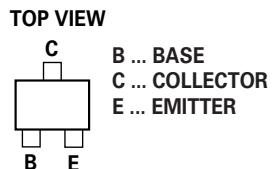

CHIP RESISTORS

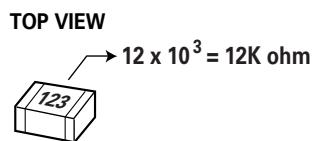

PC BOARD CONNECTIONS AND LOCATIONS

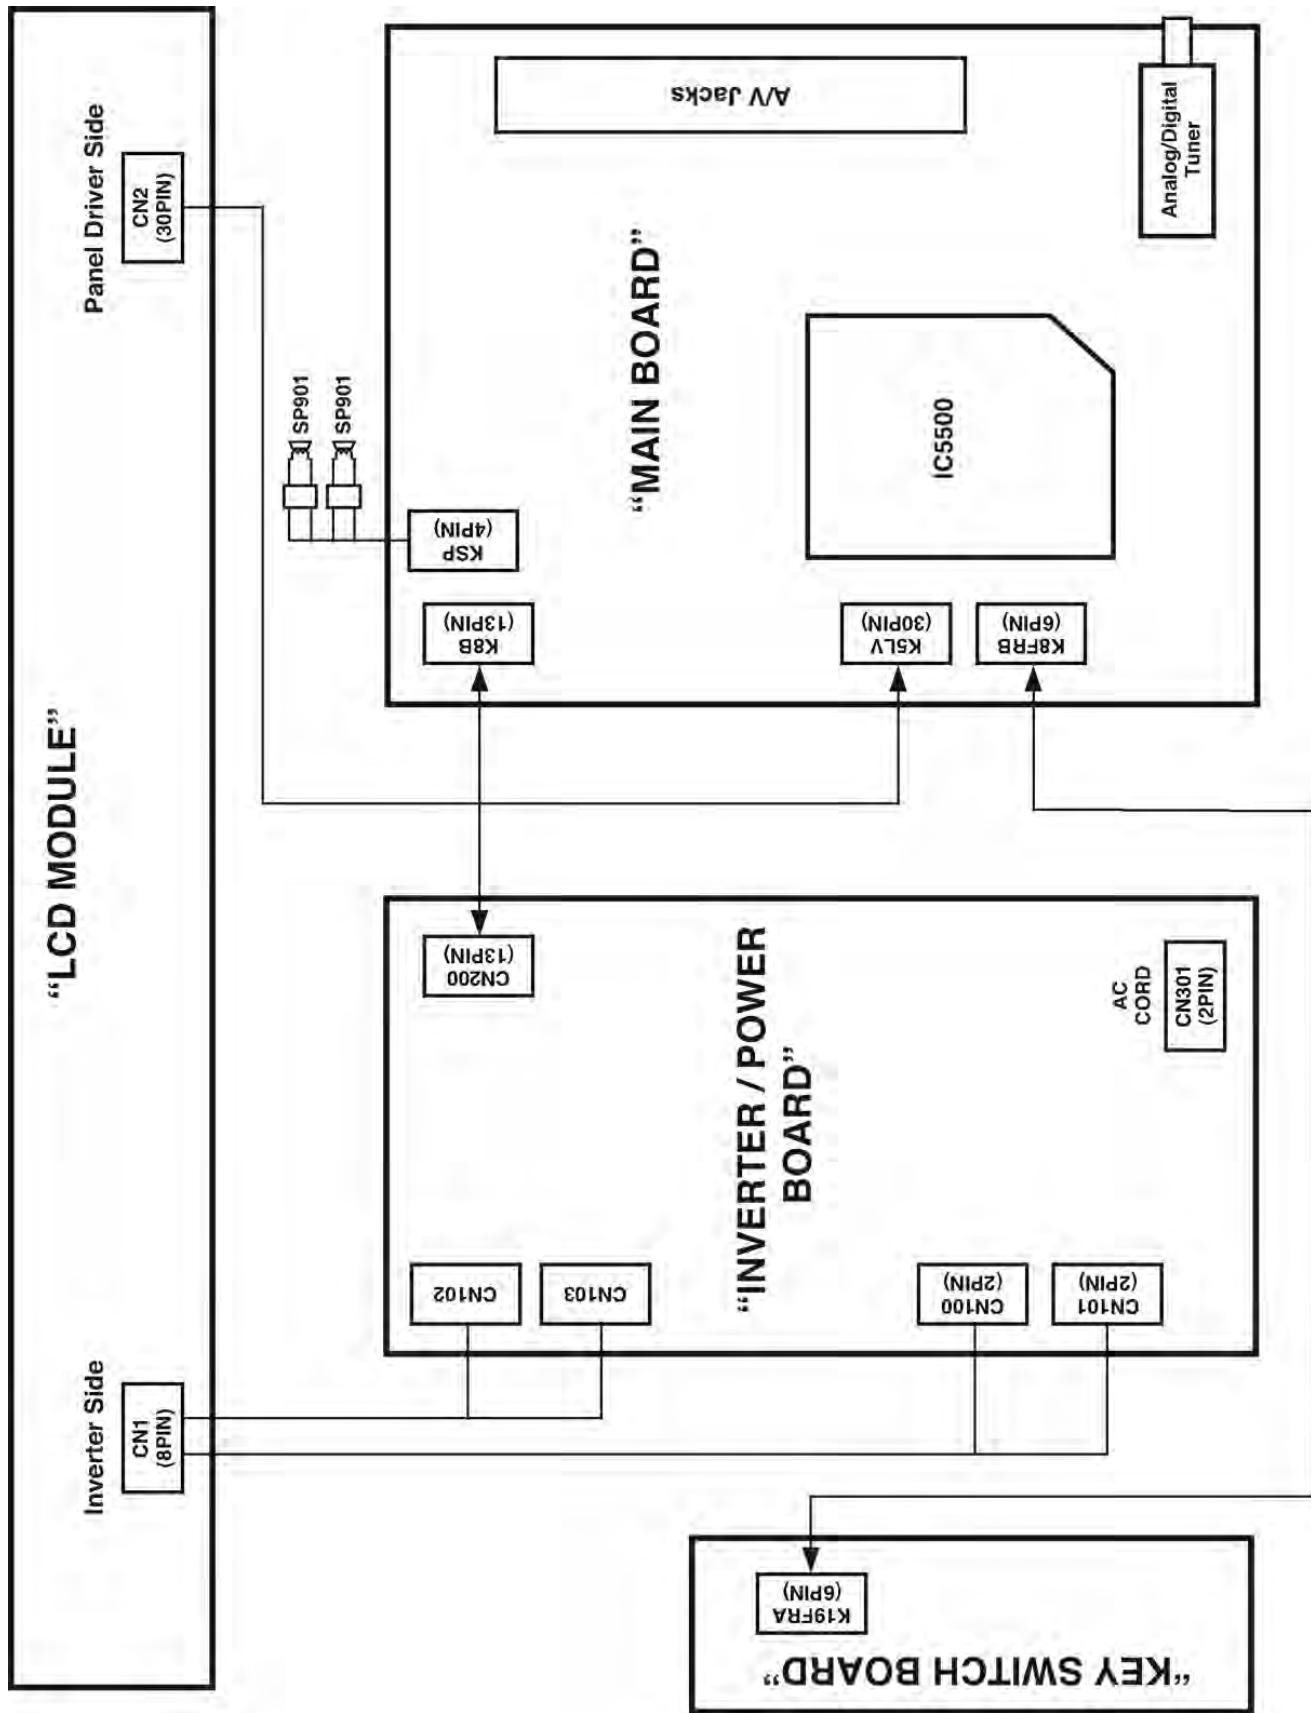

CAPACITOR AND RESISTOR CODE CHART

CAPACITOR (Example)

500	C	K	1500	B	
					Characteristics
					Value code
					Tolerance code
					Material code
					Voltage rating

Characteristics

Value code

Tolerance code

Material code

Voltage rating

D	±0.5pF
T	+50% -10%
J	±5%
K	±10%
M	±20%
N	±30%
P	+100% -0%
Z	+80% -20%
C	±0.25pF
C	Ceramic
E	Electrolytic
F	Polyester
N	Polypropylene
T	Tantalum
K	Ceramic
H	MT-Composite
P	NP. Electrolytic
M	MT-Polypropylene

RESISTOR (Example)

6	Y	K	4.7	
				Value code
				Tolerance code
				Material code
				Wattage rating

Value code

Tolerance code

Material code

Wattage rating

D	±0.5%
F	±1%
G	±2%
J	±5%
K	±10%
M	±20%
F	Fusible
N	Metalized Carbon
S	Oxide Metalized
Y	Wire Wound
C	Solid
D	Carbon Film
W	Wire Wound

For parts or service contact

Sanyo Manufacturing Corporation
P.O. Box 2000
3333 Sanyo Road
Forrest City, Arkansas 72335-2000

