

QUAD OPERATIONAL AMPLIFIERS


The KA224 series consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide voltage range.

Operation from split power supplies is also possible so long as the difference between the two supplies is 3 volts to 32 volts.


Application areas include transducer amplifier, DC gain blocks and all the conventional OP amp circuits which now can be easily implemented in single power supply systems.

FEATURES

- Internally frequency compensated for unity gain
- Large DC voltage gain: 100dB
- Wide power supply range: KA224/A, KA324/A: 3V~32V (or \pm 1.5V ~ 15V)
KA2902: 3V~26V (or \pm 1.5V ~ 13V)
- Input common-mode voltage range includes ground
- Large output voltage swing: 0V DC to V_{CC} -1.5V DC
- Power drain suitable for battery operation.

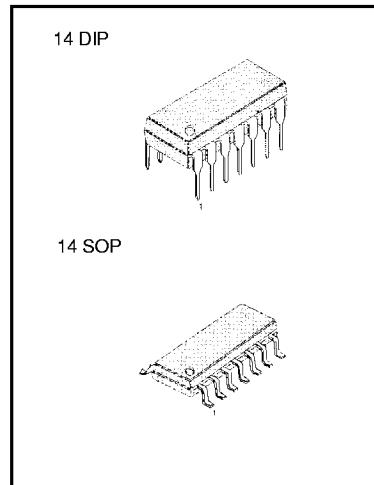


BLOCK DIAGRAM

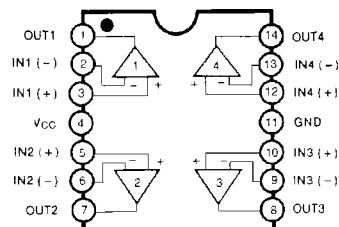

ORDERING INFORMATION

Device	Package	Operating Temperature
KA324	14 DIP	0 ~ + 70°C
KA324A		
KA324D	14 SOP	-25 ~ + 85°C
KA324AD		
KA224	14 DIP	-40 ~ + 85°C
KA224A		
KA224D	14 SOP	-40 ~ + 85°C
KA224AD		
KA2902	14 DIP	-40 ~ + 85°C
KA2902D	14 SOP	

SCHEMATIC DIAGRAM (One Section Only)

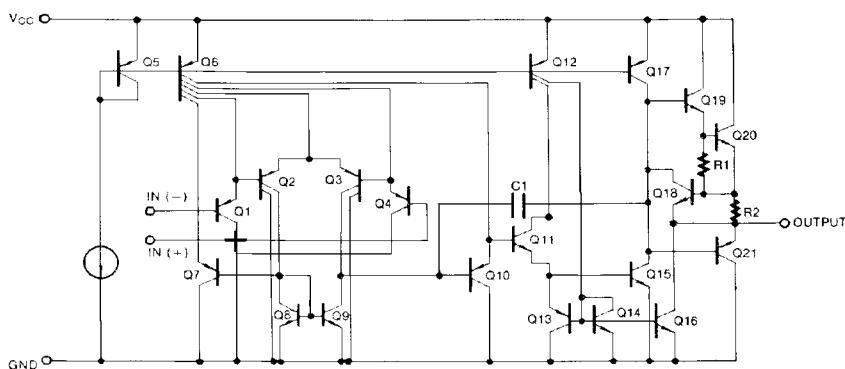

Rev. B

KA224/A, KA324/A, KA2902**QUAD OPERATIONAL AMPLIFIER****ABSOLUTE MAXIMUM RATINGS**

Characteristic	Symbol	KA224/KA224A	KA324/KA324A	KA2902	Unit
Power Supply Voltage	V _{CC}	± 18 or 32	± 18 or 32	± 13 or 26	V
Differential Input Voltage	V _{I(DIFF)}	32	32	26	V
Input Voltage	V _I	-0.3 to +32	-0.3 to +32	-0.3 to +26	V
Output Short Circuit to GND		Continuous	Continuous	Continuous	
V _{CC} ≤ 15V T _A =25°C (One Amp)					
Power Dissipation	P _D	570	570	570	mW
Operating Temperature Range	T _{OPR}	-25 ~ +85	0 ~ +70	-40 ~ +85	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	-65 ~ +150	-65 ~ +150	°C

ELECTRICAL CHARACTERISTICS(V_{CC}=5.0V, V_{EE}=GND, T_A=25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA224			KA324			KA2902			Unit
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0Ω		1.5	5.0		1.5	7.0		1.5	7.0	mV
Input Offset Current	I _{IO}			2.0	30		3.0	50		3.0	50	nA
Input Bias Current	I _{BIAS}			40	150		40	250		40	250	nA
Input Common-Mode Voltage Range	V _{I(R)}	V _{CC} = 30V (V _{CC} = 26V for KA2902)	0	V _{CC} -1.5		0	V _{CC} -1.5		0	V _{CC} -1.5		V
Supply Current	I _{CC}	R _L = , V _{CC} = 30V (all Amps)	1.0	3		1.0	3		1.0	3		mA
		R _L = , V _{CC} = 5V (all Amps) (V _{CC} = 26V for KA2902)	0.7	1.2		0.7	1.2		0.7	1.2		mA
Large Signal Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 2KΩ V _{O(P)} = 1V to 11V	50	100		25	100		100			V/mV
Output Voltage Swing	V _{O(H)}	V _{CC} = 30V	26		26			22				V
		V _{CC} = 26V for 2902	R _L = 2KΩ	27	28	27	28		23	24		V
	V _{O(L)}	V _{CC} = 5V, R _L ≥ 10KΩ		5	20		5	20		5	100	mV
Common-Mode Rejection Ratio	CMRR		70	85		65	75		50	75		dB
Power Supply Rejection Ratio	PSRR		65	100		65	100		50	100		dB
Channel Separation	CS	f = 1KHz to 20Khz		120			120			120		dB
Short Circuit to GND	I _{SC}			40	60		40	60		40	60	mA
Output Current	I _{SOURCE}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V, V _{O(P)} = 2V	20	40		20	40		20	40		mA
		V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V, V _{O(P)} = 2V	10	13		10	13		10	13		mA
	I _{SINK}	V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V, V _{O(P)} = 200mV	12	45		12	45					μ A
Differential Input Voltage	V _{I(DIFF)}				V _{CC}			V _{CC}		V _{CC}	V	

KA224/A, KA324/A, KA2902**QUAD OPERATIONAL AMPLIFIER****ELECTRICAL CHARACTERISTICS**(V_{CC} = 5.0V, V_{EE} = GND, unless otherwise specified)The following specification apply over the range of -25°C ≤ T_A ≤ +85°C for the KA224; and the 0°C ≤ T_A ≤ +70°C for the KA324 ; and the -40°C ≤ T_A ≤ +85°C for the KA2902

Characteristic	Symbol	Test Conditions	KA224			KA324			KA2902			Unit
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{ICM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0Ω			7.0			9.0			10.0	mV
Input Offset Voltage Drift	Δ V _{IO} /Δ T			7.0			7.0			7.0		μ V/°C
Input Offset Current	I _{IO}				100			150			200	nA
Input Offset Current Drift	Δ I _{IO} /Δ T			10			10			10		pA/°C
Input Bias Current	I _{Bias}				300			500			500	nA
Input Common-Mode Voltage Range	V _{IC(R)}	V _{CC} = 30V (V _{CC} = 26V for KA2902)	0		V _{CC} -2.0	0		V _{CC} -2.0	0		V _{CC} -2.0	V
Large Signal Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 2.0KΩ V _{O(P)} = 1V to 11V	25			15			15			V/mV
Output Voltage Swing	V _{O(H)}	V _{CC} = 30V R _L = 2KΩ V _{CC} = 26V for 2902 R _L = 10KΩ	26			26			22			V
	V _{O(L)}	V _{CC} = 5V, R _L ≥ 10KΩ		5	20		5	20		5	100	mV
Output Current	I _{SOURCE}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V, V _{O(P)} = 2V	10	20		10	20		10	20		mA
	I _{SINK}	V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V, V _{O(P)} = 2V	10	13		5	8		5	8		mA
Differential Input Voltage	V _{I(DIFS)}				V _{CC}			V _{CC}			V _{CC}	V

KA224/A, KA324/A, KA2902**QUAD OPERATIONAL AMPLIFIER****ELECTRICAL CHARACTERISTICS**(V_{CC}=50V, V_{EE} = GND, T_A=25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA224A			KA324A			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0		1.0	3.0		1.5	3.0	mV
Input Offset Current	I _{IO}			2	15		3.0	30	nA
Input Bias Current	I _{BIA} S			40	80		40	100	nA
Input Common-Mode Voltage Range	V _{I(R)}	V _{CC} = 30V	0	V _{CC} -1.5	0	V _{CC} -1.5			V
Supply Current (All Amps)	I _{CC}	V _{CC} = 30V		1.5	3		1.5	3	mA
		V _{CC} = 5V		0.7	1.2		0.7	1.2	mA
Large Signal Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 2KΩ V _{O(P)} = 1V to 11V	50	100		25	100		V/mV
Output Voltage Swing	V _{O(H)}	V _{CC} = 30V R _L = 2KΩ	26			26			V
		V _{CC} = 26V for 2902 R _L = 10KΩ	27	28		27	28		V
Common-Mode Rejection Ratio	CMRR	V _{CC} = 5V, R _L ≥ 10KΩ		5	20		5	20	mV
			70	85		65	85		dB
Power Supply Rejection Ratio	PSRR			65	100		65	100	dB
Channel Separation	CS	f = 1KHz to 20KHz		120			120		dB
Short Circuit to GND	I _{SC}			40	60		40	60	mA
Output Current	I _{SOURCE}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V	20	40		20	40		mA
	I _{SINK}	V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V, V _{O(P)} = 2V	10	20		10	20		mA
		V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V, V _{O(P)} = 200mV	12	50		12	50		μ A
Differential Input Voltage	V _{I(DIFF)}				V _{CC}			V _{CC}	V







KA224/A, KA324/A, KA2902**QUAD OPERATIONAL AMPLIFIER****ELECTRICAL CHARACTERISTICS**(V_{CC} = 5.0V, V_{EE} = GND, unless otherwise specified)The following specification apply over the range of -25°C ≤ T_A ≤ +85°C for the KA224A; and the 0°C ≤ T_A ≤ +70°C for the KA324A

Characteristic	Symbol	Test Conditions	KA224A			KA324A			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{O(P)} = 1.4V, R _S = 0Ω			4.0			5.0	mV
Input Offset Voltage Drift	Δ V _{IO} /Δ T			7.0	20		7.0	30	μ V/°C
Input Offset Current	I _{IO}				30			75	nA
Input Offset Current Drift	Δ I _{IO} /Δ T			10	200		10	300	pA/°C
Input Bias Current	I _{BIAS}			40	100		40	200	nA
Input Common-Mode Voltage Range	V _{I(R)}	V _{CC} = 30V	0		V _{CC} -2.0	0		V _{CC} -2.0	V
Large Signal Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 2.0KΩ	25			15			V/mV
Output Voltage Swing	V _{O(P,P)}	V _{CC} = 30V	R _L = 2KΩ	26		26			V
			R _L = 10KΩ	27	28		27	28	
Output Current	I _{SOURCE}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V	10	20		10	20		mA
	I _{SINK}	V _{I(+)} = 0V, V _{I(-)} = 1V V _{CC} = 15V	5	8		5	8		
					V _{CC}			V _{CC}	
Differential Input Voltage	V _{I(DIFF)}								V

KA224/A, KA324/A, KA2902

QUAD OPERATIONAL AMPLIFIER

TYPICAL PERFORMANCE CHARACTERISTICS

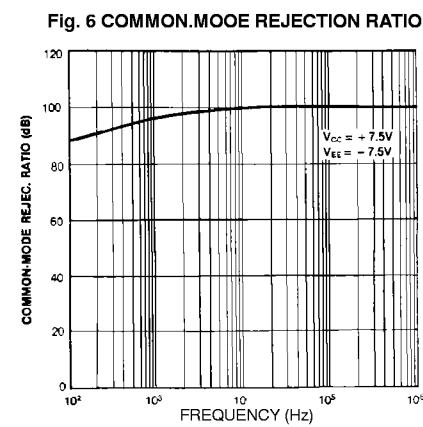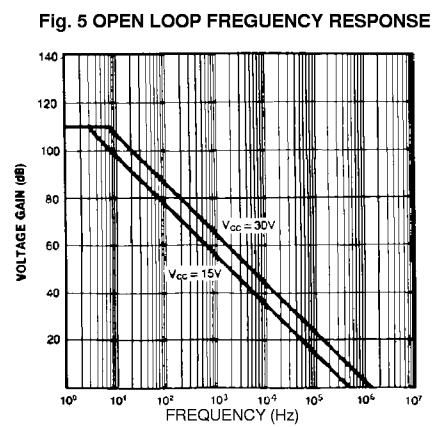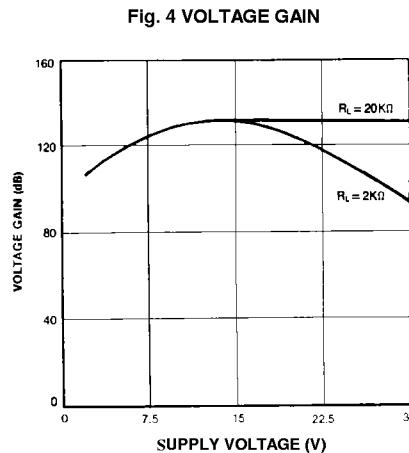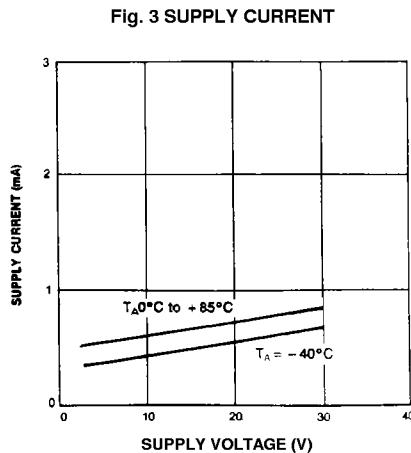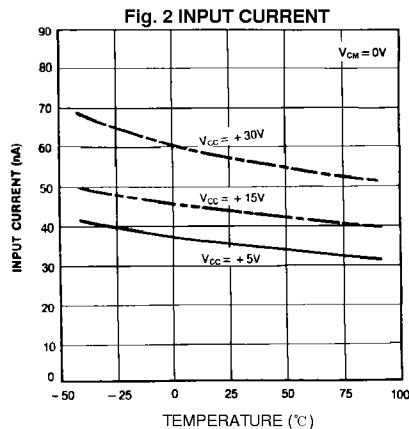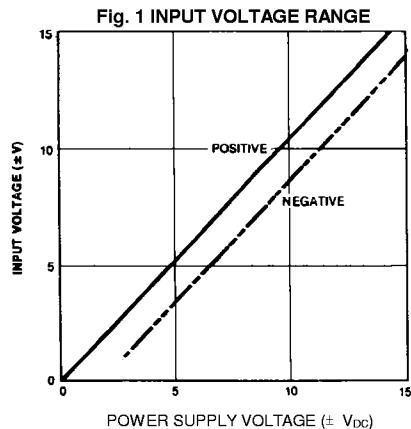

KA224/A, KA324/A, KA2902

QUAD OPERATIONAL AMPLIFIER

Fig.7 SLEW RATE

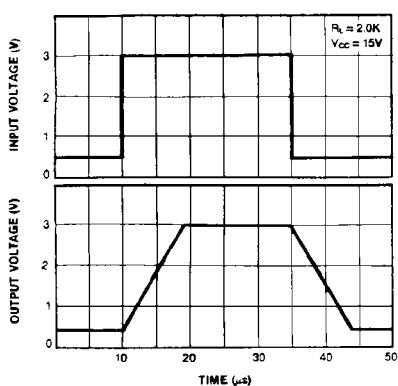


Fig. 8 VOLTAGE FOLLOWER PULSE RESPONSE (SMALL SIGNAL)

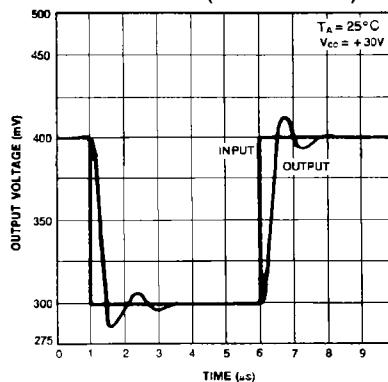


Fig. 9 LARGE SIGNAL FREQUENCY RESPONSE

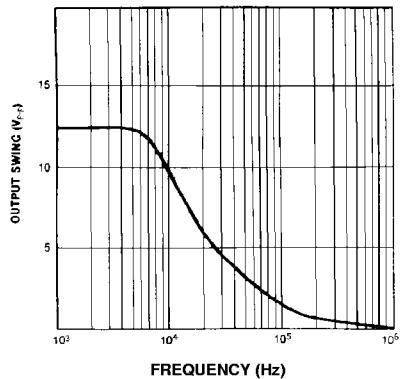


Fig. 10 OUTPUT CHARACTERISTICS CURRENT SOURCING

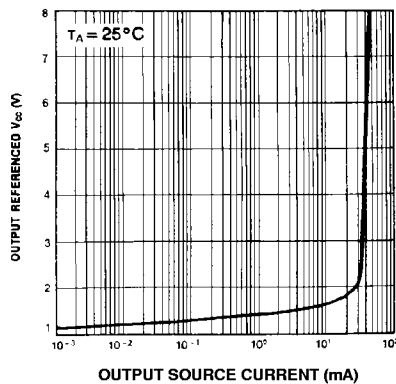


Fig. 11 OUTPUT CHARACTERISTICS CURRENT SINKING


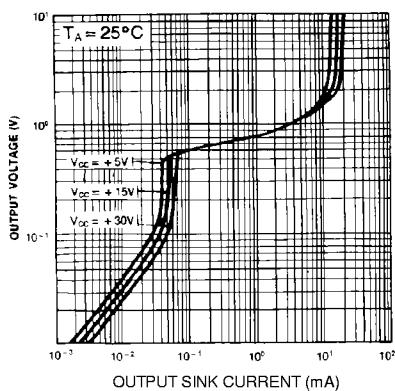


Fig. 12 CURRENT LIMITING

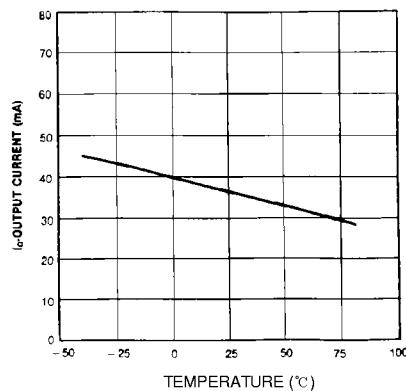

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACETM
CoolFETTM
CROSSVOLTTM
E²CTMMOS
FACTTM
FACT Quiet SeriesTM
FAST[®]
FASTRTM
GTOTM
HiSeCTM

ISOPLANARTM
MICROWIRETM
POPTM
PowerTrenchTM
QSTM
Quiet SeriesTM
SuperSOTTM.3
SuperSOTTM.6
SuperSOTTM.8
TinyLogicTM

UHCTM
VCXTM

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.