



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# RGP20A THRU RGP20M

**2.0 Amp Glass  
 Passivated Junction  
 Fast Recovery  
 Rectifiers  
 50 to 1000 Volts**

## Features

- High temperature metallurgically bonded construction
- Glass passivated cavity-free junction
- 2.0 amperes operation at  $T_A=55^\circ\text{C}$  and with no thermal runaway.
- Typical  $I_R$  less than 0.2uA

## Maximum Ratings


- Operating Temperature:  $-55^\circ\text{C}$  to  $+150^\circ\text{C}$
- Storage Temperature:  $-55^\circ\text{C}$  to  $+150^\circ\text{C}$
- Typical Thermal Resistance:  $22^\circ\text{C/W}$  Junction to Ambient

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
RGP20A	50V	35V	50V
RGP20B	100V	70V	100V
RGP20D	200V	140V	200V
RGP20G	400V	280V	400V
RGP20J	600V	420V	600V
RGP20K	800V	560V	800V
RGP20M	1000V	700V	1000V

## Electrical Characteristics @ $25^\circ\text{C}$ Unless Otherwise Specified

Maximum Average Forward Current	$I_{F(AV)}$	2.0 A	$T_A = 55^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	80A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	1.3V	$I_{FM} = 2.0\text{A};$ $T_A=25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	5.0uA 200uA	$T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$
Maximum Reverse Recovery Time RGP20A-20G RGP20J RGP20K-20M	$T_{rr}$	150nS 250nS 500nS	$I_f=0.5\text{A}, I_R=1.0\text{A},$ $I_r=0.25\text{A}$
Typical Junction Capacitance	$C_J$	35pF	Measured at $f=1.0\text{MHz}$ $V_R=4.0\text{V}$

## DO-201AE

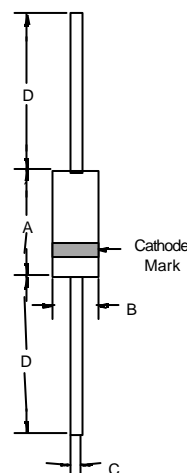


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.370	---	9.50	
B	---	.250	---	6.40	
C	.038	.042	0.96	1.06	
D	1.000	---	25.40	---	

# RGP20A thru RGP20M




Figure 1  
Typical Forward Characteristics

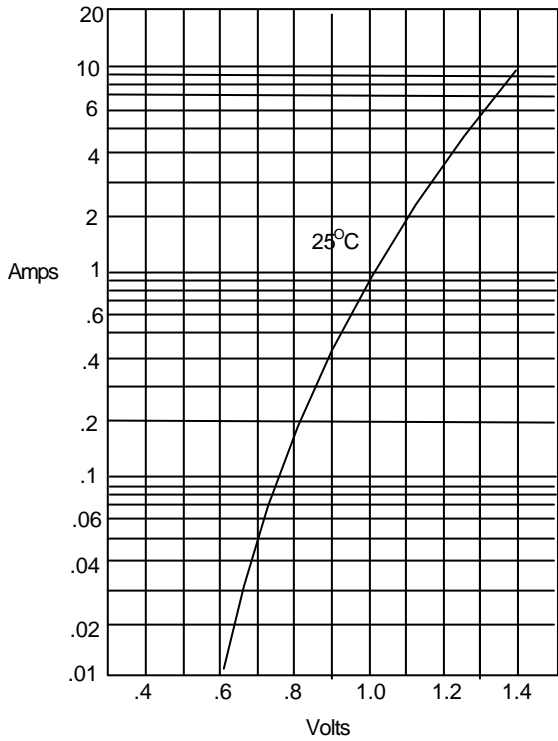

Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts


Figure 2  
Forward Derating Curve

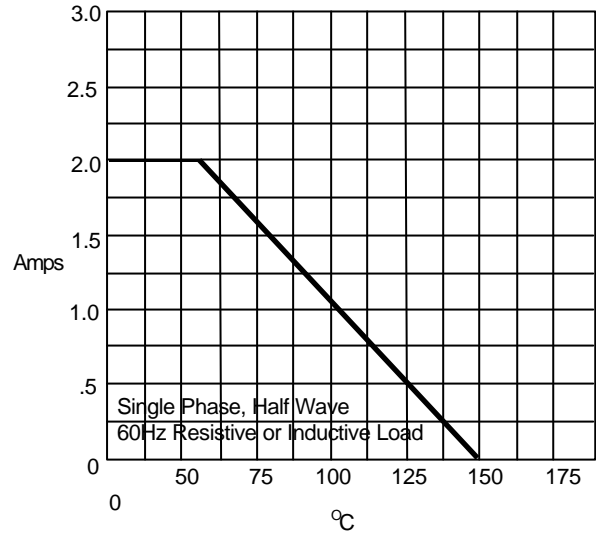

Single Phase, Half Wave  
60 Hz Resistive or Inductive Load

Average Forward Rectified Current - Amperes versus  
Ambient Temperature - °C


Figure 3  
Junction Capacitance

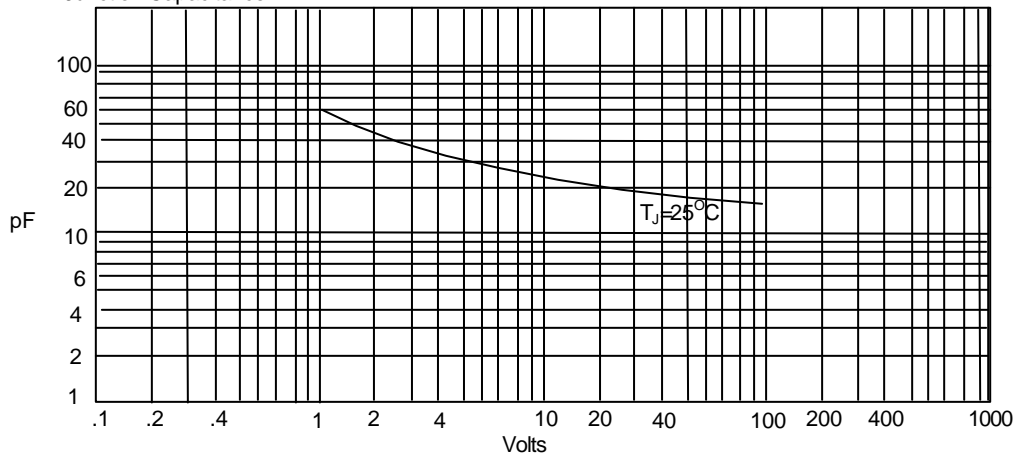

Junction Capacitance - pF versus  
Reverse Voltage - Volts


# RGP20A thru RGP20M

Figure 4  
Peak Forward Surge Current

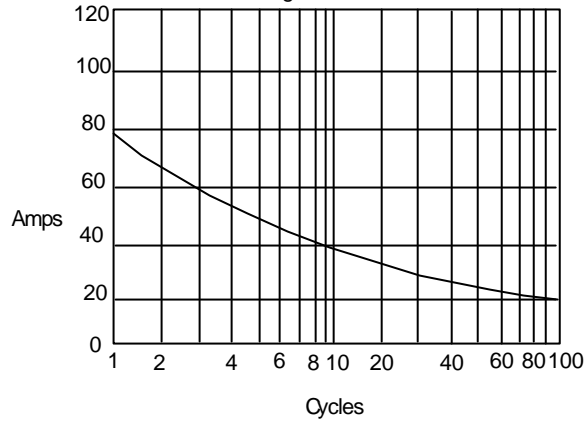

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles

Figure 5  
Reverse Recovery Time Characteristic And Test Circuit Diagram

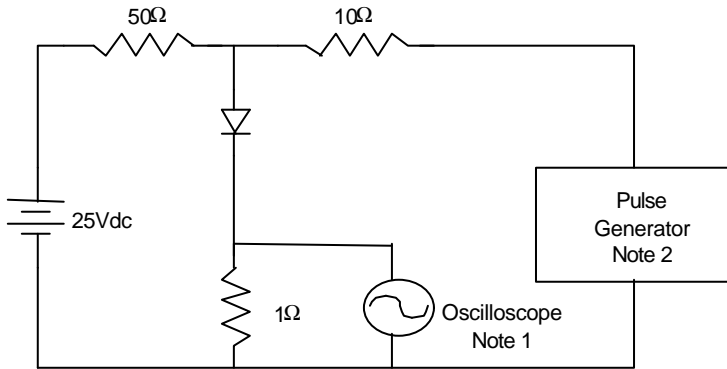

Notes:

1. Rise Time = 7ns max.  
Input impedance = 1 megohm, 22pF
2. Rise Time = 10ns max.  
Source impedance = 50 ohms
3. Resistors are non-inductive

