

unit : mm

Epitaxial planar PNP silicon transistor

### Description

• Dual chip digital transistor


#### Features

- Two SRA2204 chips in SOT-363 package
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

### **Ordering Information**

Type NO.	Marking	Package Code	
SUR547J	XHX	SOT-363	

# **Outline Dimensions**

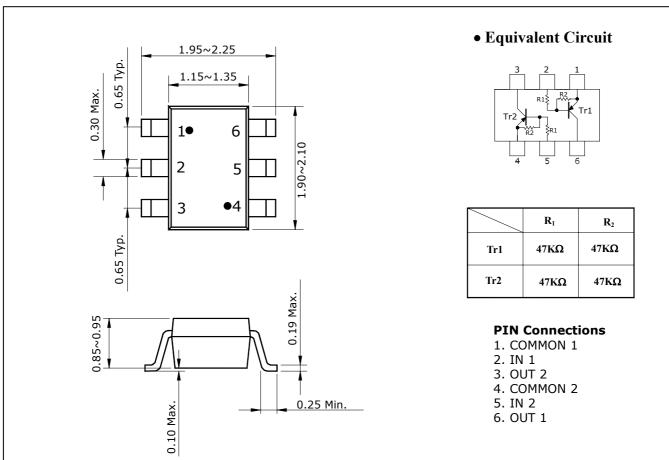

# **SUR547J**

(Ta=25°C)

## Absolute Maximum Ratings [Tr1,Tr2]

Absolute Maximum Ratings [Tr1,Tr2]			(Ta=25°C)
Characteristic	Symbol	Rating	Unit
Output voltage	Vo	-50	V
Input voltage	VI	-40, 10	V
Output current	I <sub>O</sub>	-100	mA
Power dissipation	P <sub>D</sub> *	200	mW
Junction temperature	Tյ	150	°C
Storage temperature range	T <sub>stg</sub>	-55 ~ 150	°C

\*: Total rating


### **Electrical Characteristics** [Tr1,Tr2]

Characteristic Symbol **Test Condition** Min. Max. Unit Typ. -500 Output cut-off current  $V_0 = -50V, V_I = 0$  $I_{O(OFF)}$ nA \_ -DC current gain  $G_{I}$  $V_0 = -5V$ ,  $I_0 = -10mA$ 80 200 --Output voltage  $I_0$ =-10mA,  $I_I$ =-0.5mA -0.1 -0.3 V V<sub>O(ON)</sub> \_ Input voltage (ON)  $V_0$ =-0.2V,  $I_0$ =-5mA -2.8 -5.0 V -V<sub>I(ON)</sub> Input voltage (OFF) V<sub>0</sub>=-5V, I<sub>0</sub>=-0.1mA V -1.0 -1.2  $V_{I(OFF)}$  $f_{T}^{*}$ --Transition frequency  $V_0$ =-10V,  $I_0$ =-5mA, f=1MHz 200 MHz  $V_{I}$ =-5V,  $I_{O}$ =0 -0.18 Input current  $I_{I}$ mΑ -Input resistor (Input to base) 33 61 KΩ  $R_1$ 47 -KΩ Input resistor (Base to common) 33 47 61  $R_2$ -

\* : Characteristic of transistor only

# SUR547J

### Electrical Characteristic Curves [Tr1,Tr2]

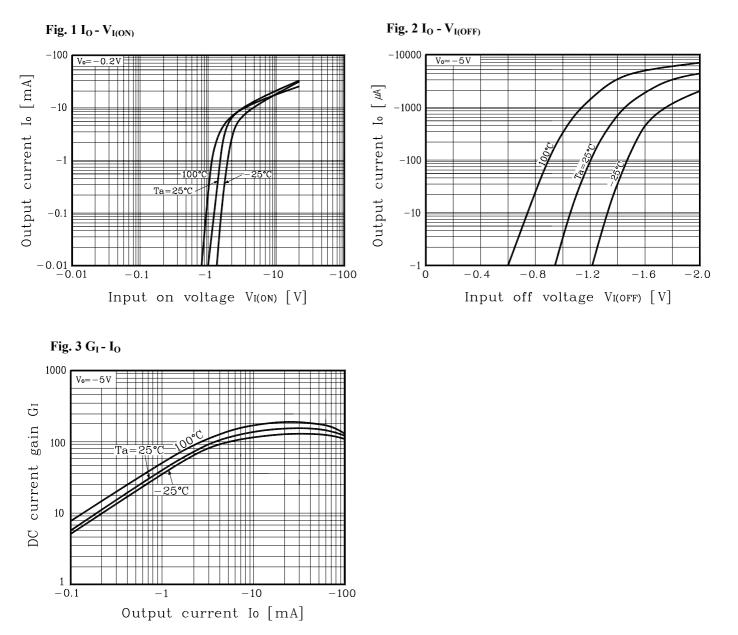

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.