

HIGH POWER NPN SILICON TRANSISTOR

- SGS-THOMSON PREFERRED SALESTYPE
- NPN TRANSISTOR
- HIGH CURRENT CAPABILITY
- FAST SWITCHING SPEED
- FULLY CHARACTERISED AT 125°C



APPLICATION

- SWITCHING REGULATORS
- MOTOR CONTROL

DESCRIPTION

The BUV50 is a Multi-epitaxial planar NPN transistor in TO-3 metal case.

It's intended for use in high frequency and efficiency converters such as motor controllers and industrial equipment.

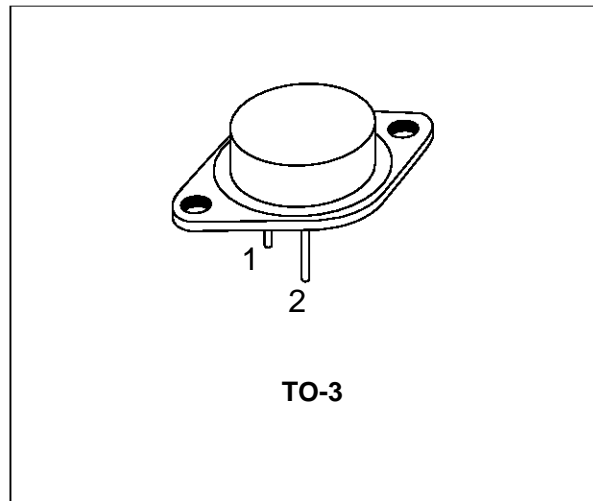
INTERNAL SCHEMATIC DIAGRAM

SC08820
ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CEV}	Collector-Emitter Voltage ($V_{BE} = -1.5V$)	250	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	125	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_C	Collector Current	25	A
I_{CM}	Collector Peak Current	50	A
I_B	Base Current	6	A
I_{BM}	Base Peak Current	12	A
P_{Base}	Reverse Bias Base Power Dissipation (B.E. junction in avalanche)	2	W
P_{tot}	Total Power Dissipation at $T_{case} \leq 25^\circ C$	150	W
T_{stg}	Storage Temperature	-65 to 200	°C
T_j	Max Operating Junction Temperature	150	°C

BUV50

THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	1.17	$^{\circ}C/W$
----------------	----------------------------------	-----	------	---------------

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER}	Collector Cut-off Current ($R_{BE} = 10\Omega$)	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV} \quad T_C = 100^{\circ}C$			1 5	mA mA
I_{CEV}	Collector Cut-off Current	$V_{CE} = V_{CEV} \quad V_{BE} = -1.5V$ $V_{CE} = V_{CEV} \quad V_{BE} = -1.5V \quad T_C = 100^{\circ}C$			1 5	mA mA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5V$			1	mA
$V_{CEO(sus)*}$	Collector-Emitter Sustaining Voltage	$I_C = 0.2A$ $L = 25mH$	125			V
V_{EB0}	Emitter-base Voltage ($I_C = 0$)	$I_E = 50mA$	7			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 10A \quad I_B = 0.5A$		0.4	0.8	V
		$I_C = 20A \quad I_B = 2A$		0.6	0.9	V
		$I_C = 24A \quad I_B = 3A$		0.7	1.2	V
		$I_C = 10A \quad I_B = 0.5A \quad T_j = 100^{\circ}C$		0.5	0.9	V
		$I_C = 20A \quad I_B = 2A \quad T_j = 100^{\circ}C$		0.75	1.5	V
		$I_C = 24A \quad I_B = 3A \quad T_j = 100^{\circ}C$		0.9	1.8	V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 20A \quad I_B = 2A$		1.25	1.6	V
		$I_C = 24A \quad I_B = 3A$		1.35	1.7	V
		$I_C = 20A \quad I_B = 2A \quad T_j = 100^{\circ}C$		1.25	1.7	V
		$I_C = 24A \quad I_B = 3A \quad T_j = 100^{\circ}C$		1.45	1.9	V
di_c/d_t^*	Rate of Rise of on-state Collector Current	$V_{CC} = 100V \quad I_{B1} = 3A$ $R_C = 0$ $T_j = 25^{\circ}C$ $T_j = 100^{\circ}C$	50	100		A/ μs
			45	85		A/ μs
$V_{CE(2\mu s)}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 100V \quad I_{B1} = 2A$ $R_C = 5\Omega$ $T_j = 25^{\circ}C$ $T_j = 100^{\circ}C$		1.4	3	V
				2.1	4	V
$V_{CE(4\mu s)}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 100V \quad I_{B1} = 2A$ $R_C = 5\Omega$ $T_j = 25^{\circ}C$ $T_j = 100^{\circ}C$		1.1	2	V
				1.5	2.5	V

* Pulsed: Pulse duration = 300 μs , duty cycle = 2 %

ELECTRICAL CHARACTERISTICS (continued)

TURN-OFF SWITCHING CHARACTERISTICS

On Inductive Load (with negative bias)

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
t_{si}	$T_j = 25\text{ }^\circ\text{C}$	$I_C = 20\text{A}$ $I_B = 2\text{A}$ $V_{BB} = -5\text{V}$ $V_{CC} = 100\text{V}$ $V_{CLAMP} = 125\text{V}$ $L_C = 0.25\text{ mH}$ $R_{B2} = 1.3\Omega$		0.85	1.4	μs
	$T_j = 100\text{ }^\circ\text{C}$			1.2	1.7	
t_{fi}	$T_j = 25\text{ }^\circ\text{C}$			0.09	0.2	
	$T_j = 100\text{ }^\circ\text{C}$			0.17	0.3	
t_{ti}	$T_j = 25\text{ }^\circ\text{C}$			0.04	0.05	
	$T_j = 100\text{ }^\circ\text{C}$			0.07	0.1	
t_c	$T_j = 25\text{ }^\circ\text{C}$		0.16	0.3		
	$T_j = 100\text{ }^\circ\text{C}$		0.3	0.5		


TURN-OFF SWITCHING CHARACTERISTICS

On Inductive Load (without negative bias)

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
t_{si}	$T_j = 25\text{ }^\circ\text{C}$	$I_C = 20\text{A}$ $I_B = 2\text{A}$ $V_{BB} = 0$ $V_{CC} = 100\text{V}$ $V_{CLAMP} = 125\text{V}$ $L_C = 0.25\text{ mH}$ $R_{B2} = 4.7\Omega$		2.1		μs
	$T_j = 100\text{ }^\circ\text{C}$			3.2		
t_{fi}	$T_j = 25\text{ }^\circ\text{C}$			0.7		
	$T_j = 100\text{ }^\circ\text{C}$			1.2		
t_{ti}	$T_j = 25\text{ }^\circ\text{C}$			0.28		
	$T_j = 100\text{ }^\circ\text{C}$			0.55		


*Pulsed : Duration = 300ms, Duty Cycle = 2 %

Figure 1 : Switching Times Test Circuit (resistive load)

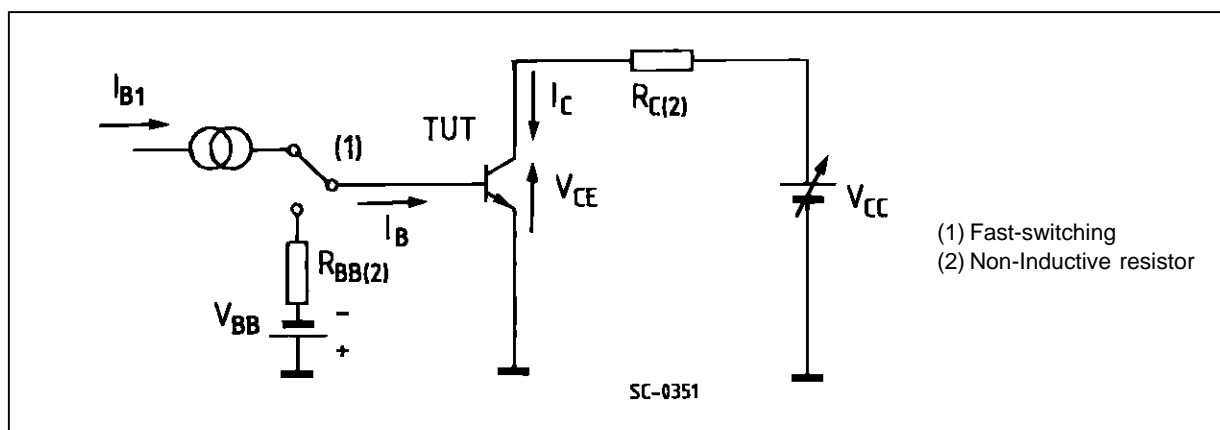

TO-3 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.00		13.10	0.433		0.516
B	0.97		1.15	0.038		0.045
C	1.50		1.65	0.059		0.065
D	8.32		8.92	0.327		0.351
E	19.00		20.00	0.748		0.787
G	10.70		11.10	0.421		0.437
N	16.50		17.20	0.649		0.677
P	25.00		26.00	0.984		1.023
R	4.00		4.09	0.157		0.161
U	38.50		39.30	1.515		1.547
V	30.00		30.30	1.187		1.193

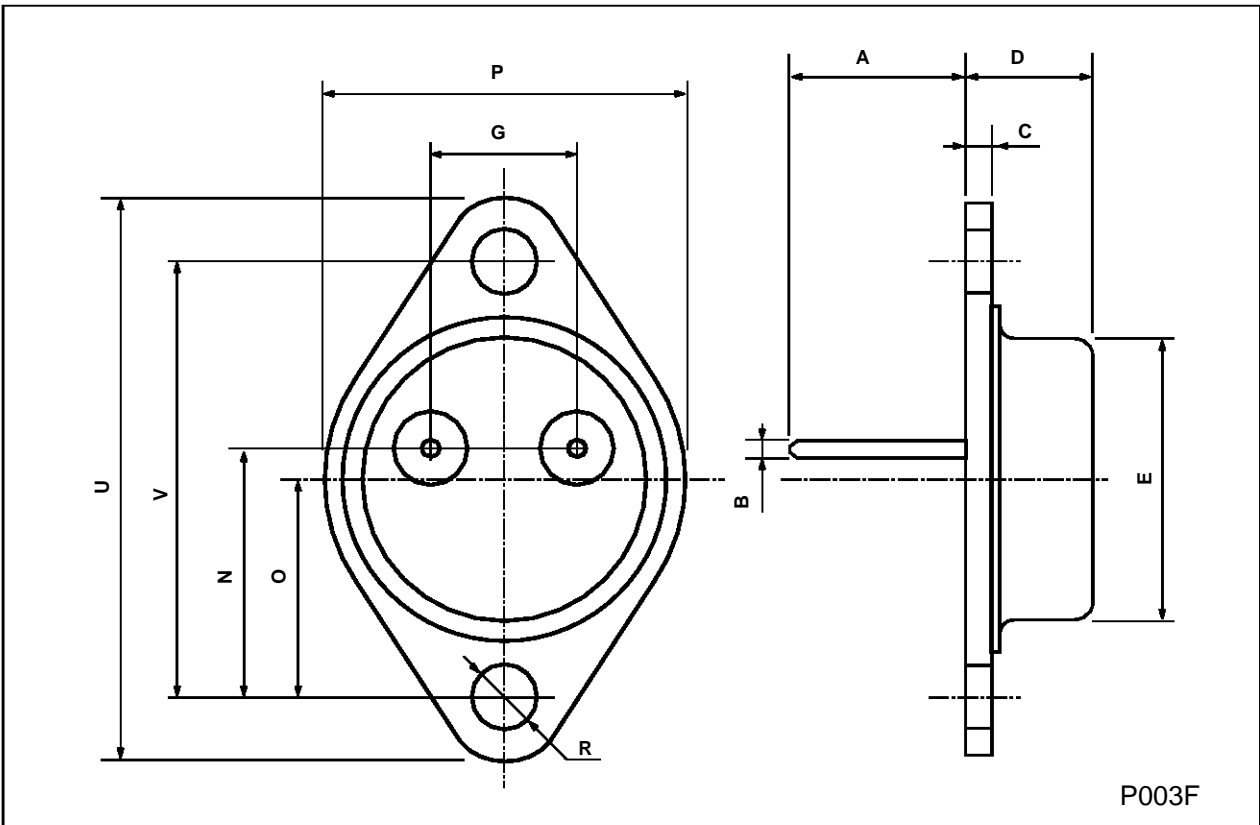

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A
...