HF116F-3 (JQX-116F-3)

MINIATURE HIGH POWER RELAY



File No.:E134517



File No.:R50031086



File No.:CQC02001001945



Features

- 30 A switching capability
- 4kV dielectric strength (between coil and contacts)
- Heavy load up to 7500VA
- Class F insulation available
- 3mm contact gap available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (50.5 x 33.5 x 51.0) mm

CONTACT DATA			
Contact arrangement	1A	2A	
Contact resistance	100mΩ (at 1A 24VDC)		
Contact material	AgSnO ₂ , AgCdO		
Contact rating (Res. load)	30A 250VAC	25A 250VAC	
	30A 28VDC	25A 28VDC	
Max. switching voltage	277VAC / 28VDC		
Max. switching current	30A	25A	
Max. switching power	7500VA/840W	6250VA/700W	
Mechanical endurance	1 x 10 ⁷ ops		
Electrical endurance	1 x 10⁵ops		

CHARACTERISTICS			
ce	1000MΩ (at 500VDC)		
n coil & contacts	4000VAC 1min		
n open contacts	2000VAC 1min		
omi. volt.)	30ms max.		
omi. volt.)	30ms max.		
Functional	100m/s² (10g)		
Destructive	1000m/s² (100g)		
e	10Hz to 55Hz 1.5mm DA		
ıre	-55°C to 70°C		
	98% RH, 40°C		
	PCB & QC, Screw		
	Approx.120g		
	Dust protected		
	n coil & contacts n open contacts omi. volt.) omi. volt.) Functional		

Notes: 1) The data shown above are initial values.

2) Please find coil temperature curve in the characteristic curves below.

COIL		
Coil power	DC type:1.9W;	AC type: 2.7VA

COIL DATA			at 23°C	
Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.3	3.3	4.7x (1±10%)
6	4.50	0.6	6.6	18.8x (1±10%)
12	9.00	1.2	13.2	75x (1±10%)
24	18.0	2.4	26.4	300x (1±10%)
48	36.0	4.8	52.8	1200x (1±10%)
100	75.0	10.0	110	5200x (1±10%)
110	82.5	12.0	121	6300x (1±10%)
200	150	20.0	220	21000x (1±10%)


Nominal Voltage VAC	Pick-up Voltage VAC	Drop-out Voltage VAC	Max. Allowable Voltage VAC	Coil Resistance Ω
6	4.80	0.90	6.6	18.8x (1±10%)
12	9.60	1.80	13.2	75x (1±10%)
24	19.2	3.60	26.4	300x (1±10%)
48	38.4	7.20	52.8	1200x (1±10%)
120	96.0	18.0	132	5200x (1±10%)
220/240	176	33.0	242	20800x (1±10%)

SAFETY APPROVAL RATINGS			
UL&CUR	AgSnO2	30A 277VAC	
		1.5HP 120VAC, 3HP 240VAC	
		10A 120VAC Tungsten	
	AgCdO	30A 277VAC	
		1.5HP 120VAC, 3HP 240VAC	
		10A 120VAC Tungsten	
		TV-10 120VAC	
		27A 240VAC COSØ =0.8	
TÜV		25A 240VAC COSØ =0.4	
		25A 240VAC COSØ =1	

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



2007 Rev. 2.00

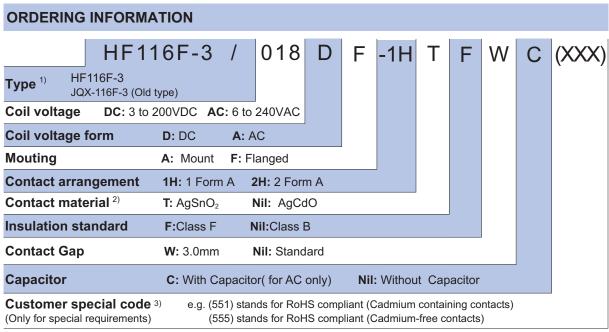


Notes: 1) We have now gradually updated our ordering information. We suggest new type should be selected. If necessary, old type can be kept for some period for the old customers.

- 2) For the application of motor load, capacitive load and the like high inrush current, AgSnO2 contact material is recommended. For the application of resistive load, inductive load, AgCdO contact material is recommended on the priority.
- 3) HF116F-3 is an environmental friendly product. Please mark a special code (555) or (551) when ordering. (551) stands RoHS compliant with Cadmium contact; (555) stands for RoHS compliant with Cadmium-free contact.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions




HF116F-3/ -F-1H




HF116F-3/□□□□-F-2H






Outline Dimensions

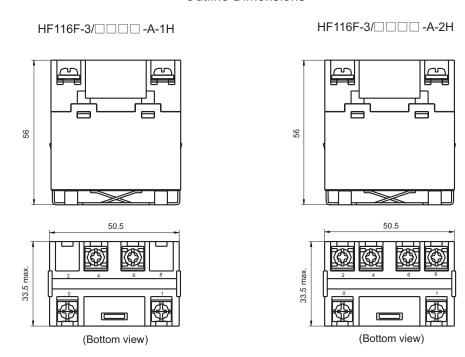

Remark: In case of no tolerance shown in outline dimension: outline dimension \leq 1mm, tolerance should be \pm 0.2mm; outline dimension >1mm and \leq 5mm, tolerance should be \pm 0.3mm; outline dimension >5mm, tolerance should be \pm 0.4mm.

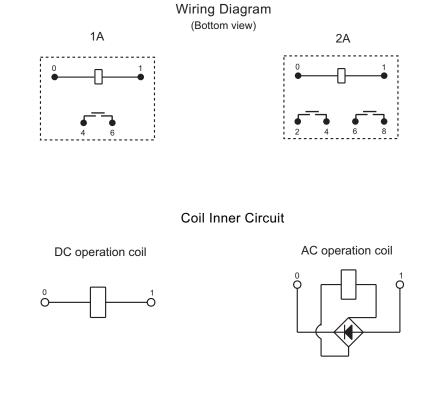


CHARACTERISTIC CURVES


ENDURANCE CURVE

2 Form A 15 20 25 30 Contact Current (A)

MAXIMUM SWITCHING POWER



COIL TEMPERATURE RISE



Percentage Of Nominal Coil Voltage

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.