

# Monolithic crystal filter

## MQF21.4-1200/23



### Application

- 10 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

### Limiting values

		Unit	Value
Center frequency	$f_0$	MHz	21.4
Insertion loss		dB	$\leq 4.0$
Pass band at 6.0 dB		kHz	$\pm 6.00$
Ripple in pass band	$f_0 \pm 4.00$ kHz	dB	$\leq 2.0$
Stop band attenuation	$f_0 \pm 14$ kHz	dB	$\geq 75$
	$f_0 \pm 16$ kHz	dB	$> 90$
Alternte attenuation	$f_0 \pm 16...300$ kHz	dB	$> 90$


### Terminating impedance Z

R1    C1	Ohm/pF	1200    2.5
R2    C2	Ohm/pF	1200    2.5


Operating temp. range	$^{\circ}\text{C}$	-20... +70
-----------------------	--------------------	------------

### Characteristics MQF21.4-1200/23

#### Pass band

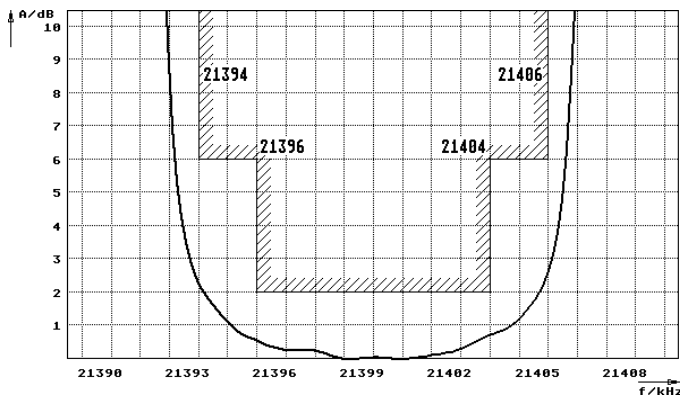

#### Stop band

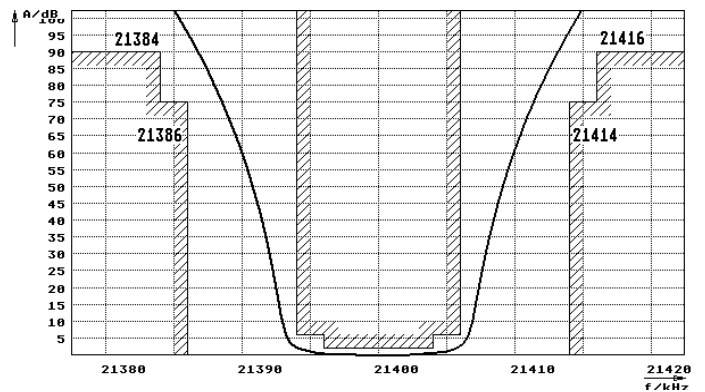

Pin connections: 1 Input  
2 Input-E  
3 Output  
4 Output-E

