


# SK 20 BGD 065 ET

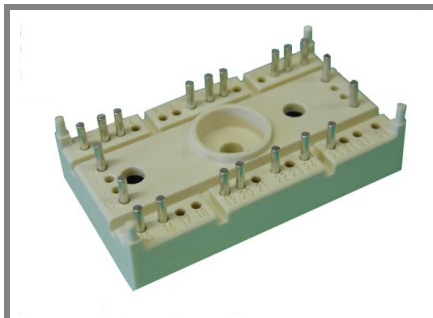

**SEMITOP<sup>®</sup> 3**

1-phase bridge rectifier  
+3-phase bridge inverter

**SK 20 BGD 065 ET**


Target Data

## Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminum oxide ceramic (DCB)
- Ultrafast NPT technology IGBT
- CAL Technology FWD
- Integrated NTC temperature sensor

## Typical Applications

- Inverter

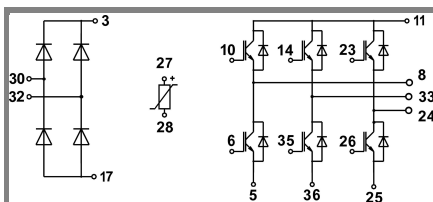


**BGD - ET**

Absolute Maximum Ratings		$T_s = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
<b>IGBT - Inverter</b>			
$V_{CES}$		600	V
$I_C$	$T_s = 25 (80)^\circ\text{C}$	24 (17)	A
$I_{CM}$	$T_s = 25 (80)^\circ\text{C}$ , $t_p \leq 1 \text{ ms}$	48 (34)	A
$V_{GES}$		$\pm 20$	V
$T_j$		-40 ... +150	$^\circ\text{C}$
<b>Diode - Inverter</b>			
$I_F$	$T_s = 25 (80)^\circ\text{C}$	25 (18)	A
$I_{FM} = -I_{CM}$	$T_s = 25 (80)^\circ\text{C}$ , $t_p \leq 1 \text{ ms}$	50 (36)	A
$T_j$		-40 ... +150	$^\circ\text{C}$
<b>Rectifier</b>			
$V_{RRM}$		800	V
$I_{FAV} / I_{TAV}$	$T_s = 80^\circ\text{C}$	20	A
$I_{FSM} / I_{TSM}$	$t_p = 10 \text{ ms}$ , $\sin 180^\circ$ , $T_j = 25^\circ\text{C}$	220	A
$I_t^2$	$t_p = 10 \text{ ms}$ , $\sin 180^\circ$ , $T_j = 25^\circ\text{C}$	240	$\text{A}^2\text{s}$
$T_j$		-40 ... +150	$^\circ\text{C}$
$T_{sol}$	Terminals, 10s	260	$^\circ\text{C}$
$T_{stg}$		-40 ... +125	$^\circ\text{C}$
$V_{isol}$	AC, 1 min. / 1s	2500 / 3000	V


Characteristics		$T_s = 25^\circ\text{C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT - Inverter</b>					
$V_{CEsat}$	$I_C = 20 \text{ A}$ , $T_j = 25 (125)^\circ\text{C}$		2 (2,2)	2,5	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$ , $I_C = 0,5 \text{ mA}$	3	4	5	V
$V_{CE(TO)}$	$T_j = ^\circ\text{C} ( )^\circ\text{C}$		1,2 (1,1)	1,3	V
$r_T$	$T_j = ^\circ\text{C} ( )^\circ\text{C}$		40 (55)	60	$\text{m}\Omega$
$C_{ies}$	$V_{CE} = V_{GE} = 0 \text{ V}$ , $f = 1 \text{ MHz}$		1,2		nF
$C_{oes}$	$V_{CE} = V_{GE} = 0 \text{ V}$ , $f = 1 \text{ MHz}$		-		nF
$C_{res}$	$V_{CE} = V_{GE} = 0 \text{ V}$ , $f = 1 \text{ MHz}$		-		nF
$R_{th(j-s)}$	per IGBT			1,7	K/W
$t_{d(on)}$	under following conditions		-		ns
$t_r$	$V_{CC} = 300 \text{ V}$ , $V_{GE} = \pm 15 \text{ V}$		-		ns
$t_{d(off)}$	$I_C = 20 \text{ A}$ , $T_j = 125^\circ\text{C}$		-		ns
$t_f$	$R_{Gon} = R_{Goff} = -\Omega$		-		ns
$E_{on}$	inductive load		0,6		mJ
$E_{off}$			0,44		mJ
<b>Diode - Inverter</b>					
$V_F = V_{EC}$	$I_F = 20 \text{ A}$ , $T_j = 25 (125)^\circ\text{C}$		1,6 (1,6)		V
$V_{(TO)}$	$T_j = ^\circ\text{C} (125)^\circ\text{C}$		1 (0,9)		V
$r_T$	$T_j = ^\circ\text{C} (125)^\circ\text{C}$		30 (33)		$\text{m}\Omega$
$R_{th(j-s)}$	per diode			1,7	K/W
$I_{RRM}$	under following conditions		-		A
$Q_{rr}$	$I_F = \text{A}$ , $V_R = \text{V}$		-		$\mu\text{C}$
$E_{rr}$	$V_{GE} = 0 \text{ V}$ , $T_j = 125^\circ\text{C}$ $di_F/dt = - \text{A}/\mu\text{s}$		-		mJ
<b>Diode rectifier</b>					
$V_F$	$I_F = 15 \text{ A}$ , $T_j = 25^\circ\text{C}$		1,1		V
$V_{(TO)}$	$T_j = 150^\circ\text{C}$		0,8		V
$r_T$	$T_j = 150^\circ\text{C}$		20		$\text{m}\Omega$
$R_{th(j-s)}$	per diode			2	K/W
<b>Temperatur sensor</b>					
$R_{ts}$	5 %, $T_r = 25 (100)^\circ\text{C}$		5000(493)		$\Omega$
<b>Mechanical data</b>					
w			30		g
$M_s$	Mounting torque			2,5	Nm

# SK 20 BGD 065 ET

Dimensions in mm

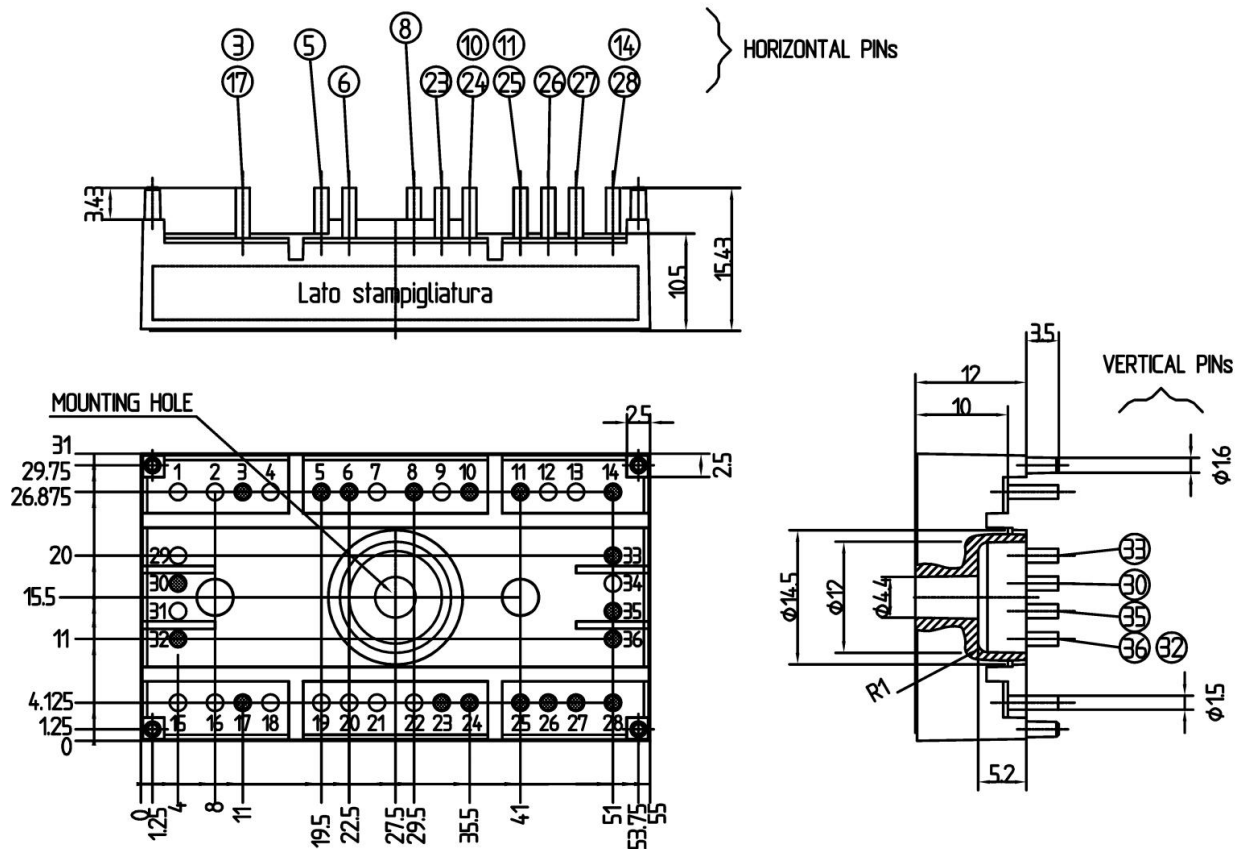

Case T 61 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

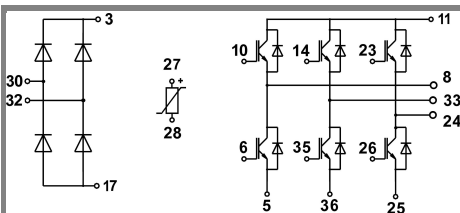

Case T 61

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.