

# SCG4501 Synchronous Clock Generators



**PLL**


2111 Comprehensive Drive

Aurora, Illinois 60505

Phone: 630-851-4722

Fax: 630-851-5040

www.conwin.com

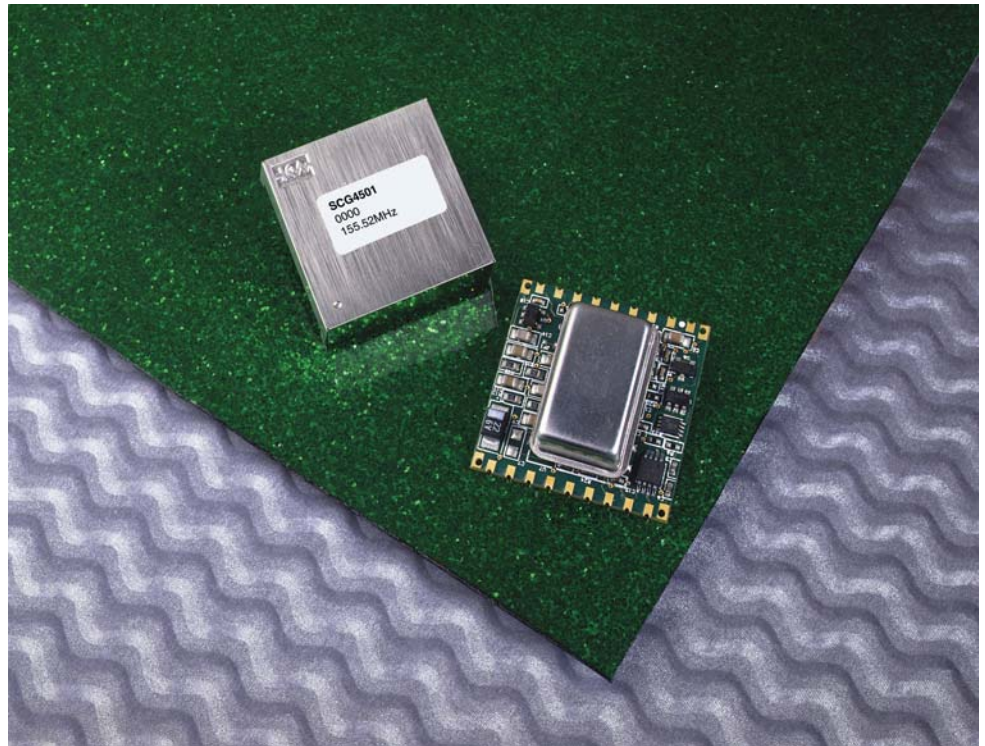

## Features

- $\pm 32$  ppm Capture/Pull-In Range
- Phase Locked Output Frequency Control
- Intrinsically Low Jitter Crystal Oscillator
- LVPECL Outputs with Disable Function
- Dual Input References
- LOR & LOL combined alarm output
- Force Free Run Function
- Automatic Free Run operation on loss of both References A & B
- Input Duty Cycle Tolerant
- 3.3V dc Power Supply
- Small Size: 1 Square Inch

|           |                  |
|-----------|------------------|
| Bulletin  | <b>SG040</b>     |
| Page      | <b>1 of 16</b>   |
| Revision  | <b>P01</b>       |
| Date      | <b>13 NOV 03</b> |
| Issued By | <b>MBatts</b>    |

## General Description

The SCG4501 is a mixed-signal phase locked loop generating LVPECL outputs from an intrinsically low jitter, voltage controlled, crystal oscillator. The LVPECL outputs may be disabled.


The SCG4501 can lock to one of two external references, which is selectable using the SEL<sub>AB</sub> input select pin. The unit has a fast acquisition time of about 1.5 seconds and it is tolerant of different reference duty cycles.

The SCG4501 includes an alarm output that indicates deviations from normal operation. If a Loss-of-Reference (LOR) or Loss-of-Lock (LOL) is detected the alarm will indicate the need for a reference rearrangement. If both references A and B are absent the module will enter Free Run operation. The FR<sub>status</sub> pin will indicate that the module is in Free Run operation. Frequency stability during Free Run operation is guaranteed to  $\pm 20$  ppm. Additionally the Free Run mode may be entered manually.

The package dimensions are 1" x 1.025" x .45" on a 6 layer FR4 board with castellated pins. Parts are assembled using high temperature solder to withstand 63/37 alloys, 180°C surface mount reflow processes.


## Maximum Dimension Package Outline

Figure 1

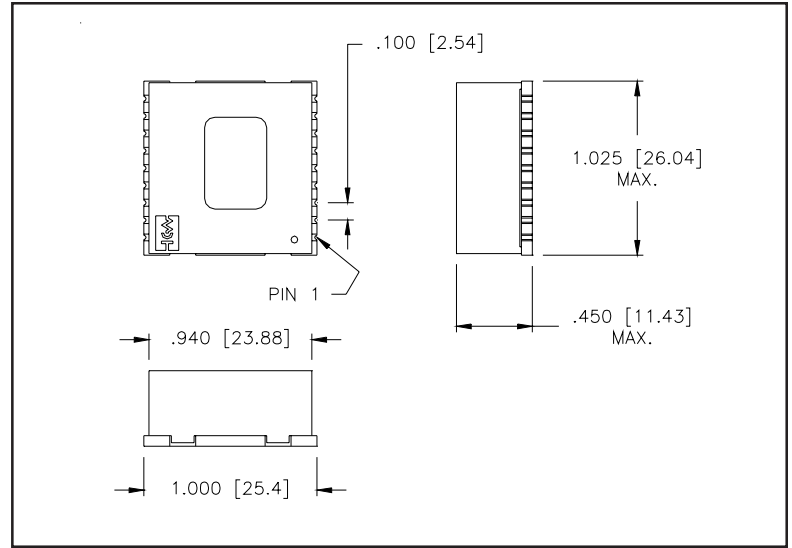

## Block Diagram

Figure 2

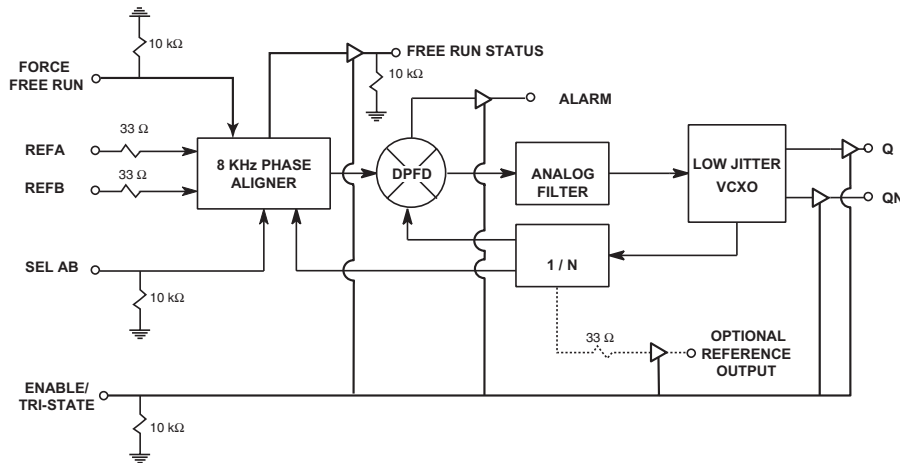

## Absolute Maximum Rating

Table 1

| Symbol   | Parameter            | Minimum | Nominal | Maximum | Units | Notes |
|----------|----------------------|---------|---------|---------|-------|-------|
| $V_{cc}$ | Power Supply Voltage | -0.5    | -       | +4.0    | Volts | 1.0   |
| $V_i$    | Input Voltage        | -0.5    | -       | +5.5    | Volts | 1.0   |
| $T_s$    | Storage Temperature  | -65.0   | -       | +100    | °C    | 1.0   |

## Operating Specifications

Table 2

| Symbol             | Parameter  | Minimum    | Nominal                 | Maximum | Units              | Notes                                    |
|--------------------|--|------------|-------------------------|---------|--------------------|--|
| $V_{cc}$           | Power Supply Voltage   | 3.135      | 3.3                     | 3.465   | Volts              | 2.0                                      |
| $I_{cc}$           | Power Supply Current   | 170        | 230                     | 280     | mA                 | 4.0                                      |
| $T_o$              | Temperature Range  | 0          | -                       | 70      | °C                 |  |
| $F_{fr}$           | Free Run Frequency   | -20        | -                       | 20      | ppm                |  |
| $F_{cap}$          | Capture/pull-in range  | -32        | -                       | 32      | ppm                |  |
| $F_{bw}$           | Jitter Filter Bandwidth  | -          | -                       | 10      | Hz                 | 3.0                                      |
| $T_{jtol}$         | Input Jitter Tolerance<br><i>(Input Jitter Frequencies <math>\geq</math> 10 Hz)</i>                      | 31.25<br>1 | -<br>-                  | -<br>-  | $\mu$ s<br>$\mu$ s | 8 kHz Ref. units<br>19.44 MHz Ref. units |
| $T_{aq}$           | Typical Acquisition Time Data  |            |                         |         |                    |  |
|                    | Acquisition from a cold power-up:  |            |                         |         |                    |  |
|                    | Phase lock within 12ns:  |            | 50                      |         | sec                |  |
|                    | Phase lock settled:  |            | 220                     |         | sec                |  |
|                    | Alarm time:  |            | <1.5                    |         | sec                |  |
|                    | Acquisition from Free Run:   |            |                         |         |                    |  |
|                    | Phase lock within 12ns:  |            | 50                      |         | sec                |  |
|                    | Phase lock settled:  |            | 220                     |         | sec                |  |
|                    | Alarm time:  |            | Typically no alarm      |         |                    |  |
|                    | Frequency lock with a 20PPM reference frequency step: Typically 0.5s.                                    |            |                         |         |                    |  |
|                    | Phase lock during a switch between equal frequency references: Typically 0.5s, no alarm should be issued |            |                         |         |                    |  |
| $T_{rf}$           | Output Rise and Fall Time (20% 80%)  | 100        | 225                     | 350     | ps                 | 4.0                                      |
| DC                 | Output Duty Cycle  | 40         | 50                      | 60      | %                  |  |
| MTIE <sub>sr</sub> | MTIE at Synchronization Rearrangement  |            | GR-253-CORE.1999 R5-136 |         |                    | 5.0, 6.0                                 |
|                    | Dynamic Offset Range (0°- 25°)   | -50        | -                       | 50      | ns                 |  |
|                    | Dynamic Offset Range (25°- 70°)  | -50        | -                       | 50      | ns                 |  |

## Output Jitter Specifications

Table 3

| Frequency (MHz) | Jitter BW 10 Hz - 1 MHz |            | SONET Jitter BW 12 kHz - 20 MHz |            |
|-----------------|-------------------------|------------|---------------------------------|------------|
|                 | pS (RMS)                | m UI       | pS (RMS)                        | m UI       |
| 77.76           | 10 Typ.                 | 0.776 Typ. | 1 Max.                          | 0.076 Max. |
| 125.00          | 10 Typ.                 | 1.250 Typ. | 1 Max.                          | 0.125 Max. |
| 155.52          | 10 Typ.                 | 1.556 Typ. | 1 Max.                          | 0.156 Max. |

**NOTES:**

- 1.0 Operation of the device at these or any other condition beyond those listed under Operating Specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods of time may affect device reliability.
- 2.0 Requires external regulation and supply decoupling. (22 uF, 330 pF)
- 3.0 3db loop response.
- 4.0 50-ohm load biased to 1.3 volts.
- 5.0 Entry into Free Run doesn't meet requirement for initial 2.33 seconds of self-timing.
- 6.0 If the selected reference is removed system response to the ALARM must be less than 10 $\mu$ s.



## Input And Output Characteristics

Table 4

| Symbol                                       | Parameter                   | Minimum | Nominal | Maximum | Units | Notes |
|--|-----------------------------|---------|---------|---------|-------|-------|
| <b>CMOS Input and Output Characteristics</b> |                             |         |         |         |       |       |
| $V_{ih}$                                     | High Level Input Voltage    | 2.0     | -       | 5.5     | V     |       |
| $V_{il}$                                     | Low Level Input Voltage     | 0.0     | -       | 0.8     | V     |       |
| $T_{io}$                                     | I/O to Output Valid         | -       | -       | 10      | ns    |       |
| $C_I$  | Output Capacitance          | -       | -       | 10      | pF    |       |
| $V_{oh}$                                     | High Level Output Voltage   | 2.4     | -       | -       | V     |       |
| $V_{ol}$                                     | Low Level Output Voltage    | -       | -       | 0.4     | V     |       |
| $T_{ir}$                                     | Input Reference Pulse Width | 12.5    | -       | -       | ns    |       |
| <b>PECL Output Characteristics</b>           |                             |         |         |         |       |       |
| $V_{oh}$                                     | High Level PECL Voltage     | 2.27    | 2.34    | 2.52    | V     |       |
| $V_{ol}$                                     | Low Level PECL Voltage      | 1.49    | 1.51    | 1.68    | V     |       |
| $C_I$  | Output Capacitance          | -       | -       | 10      | pF    |       |
| $T_{skew}$                                   | Differential Output Skew    | -       | 50      | -       | ps    |       |

## Input Selection / Output Response

Table 5


| RESET | ENABLE | SEL <sub>AB</sub> | INPUTS           |                  |    | FR | FR <sub>status</sub> | OUTPUTS |   |    | NOTE |
|-------|--------|-------------------|------------------|------------------|----|----|----------------------|---------|---|----|------|
|       |        |                   | REF <sub>A</sub> | REF <sub>B</sub> | FR |    |                      | ALARM   | Q | QN |      |
| 1     | 0      | X                 | X                | X                | X  | X  | 1                    | X       | X | X  | FR   |
| X     | 1      | X                 | X                | X                | X  | X  | X                    | X       | 0 | 1  |      |
| 0     | 0      | X                 | X                | X                | 1  | 1  | 1                    | X       | X | X  | FR   |
| 0     | 0      | 0                 | A                | A                | 0  | 0  | 0                    | 0       | X | X  | RA   |
| 0     | 0      | 1                 | A                | A                | 0  | 0  | 0                    | 0       | X | X  | RB   |
| 0     | 0      | 0                 | NA               | A                | 0  | 0  | 0                    | 1       | X | X  | U    |
| 0     | 0      | 1                 | NA               | A                | 0  | 0  | 0                    | 0       | X | X  | RB   |
| 0     | 0      | 1                 | A                | NA               | 0  | 0  | 0                    | 1       | X | X  | U    |
| 0     | 0      | 0                 | A                | NA               | 0  | 0  | 0                    | 0       | X | X  | RA   |
| 0     | 0      | X                 | NA               | NA               | 0  | 1  | 1                    | 1       | X | X  | FR   |

**NOTES:**

- A Active
- FR Free Run Mode
- NA Not Active
- RA Locked to Reference A
- RB Locked to Reference B
- U Unstable (due to conditions shown, switch to active reference or Free Run)
- X Don't care


## Typical MTIE Measurement

Figure 3

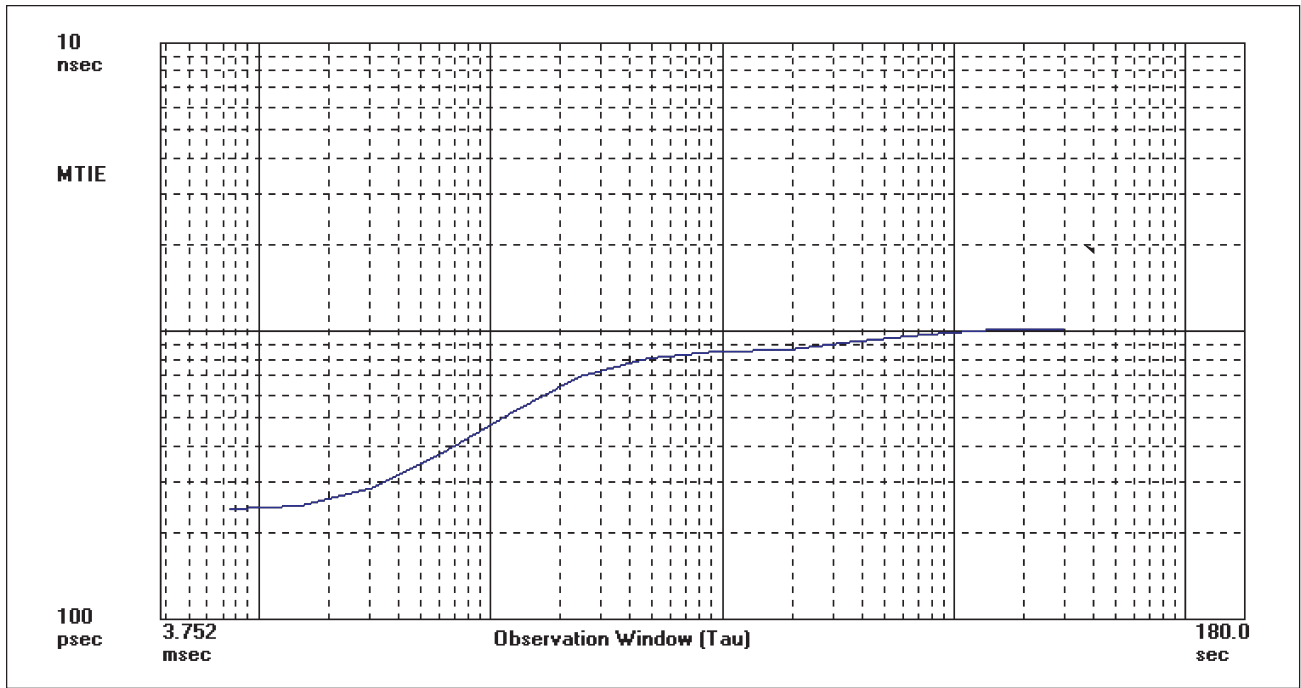


## Typical TDEV Measurement

Figure 4

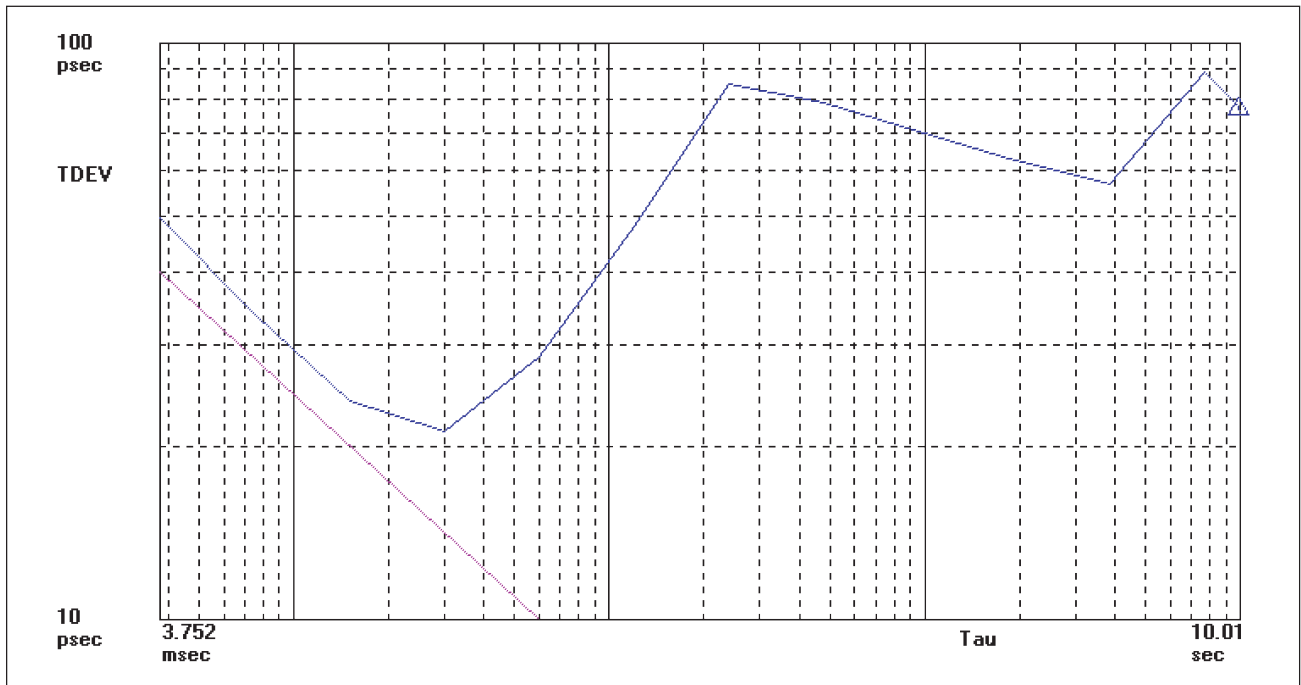

Typical MTIE at Synchronization Rearrangement. Reference B Equal to Inverse of Reference A, No Modulation.

Figure 5

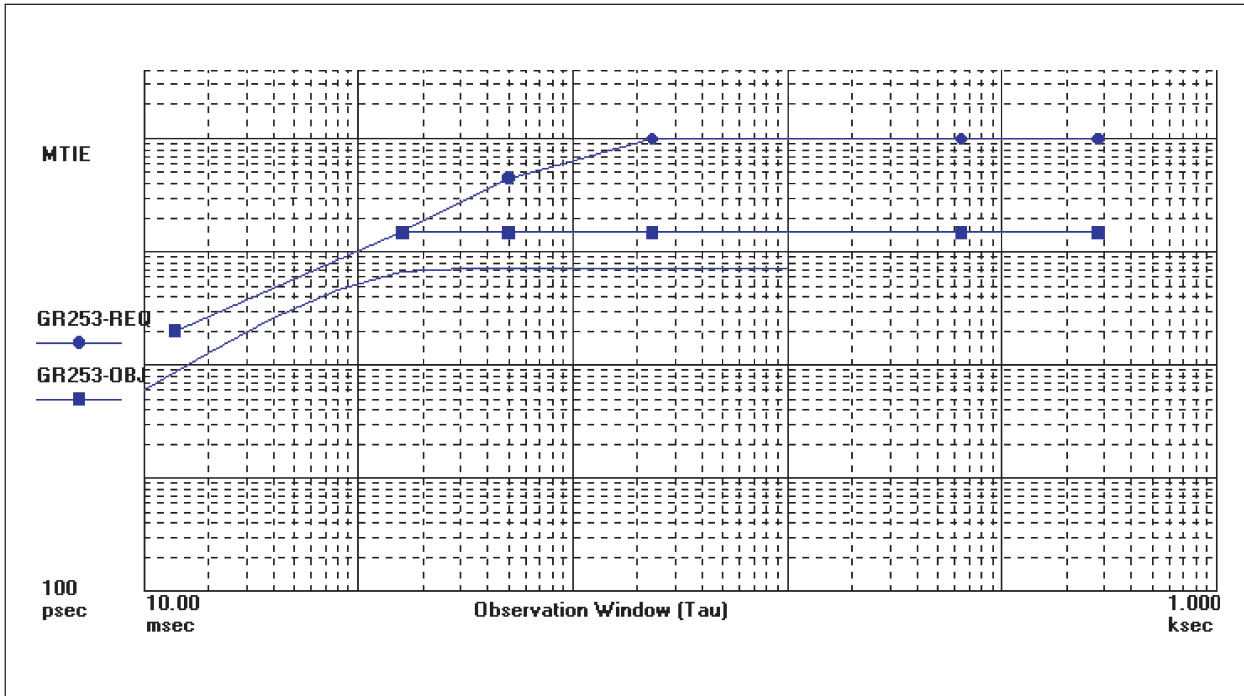

## Pin Description

Table 6


| Pin # | Pin Name             | Pin Information  | Note     |
|-------|----------------------|--|----------|
| 1     | ENABLE/TRI-STATE     | VCXO Enable. (Enable = 0, Disable = 1 = CMOS Outputs Tri-stated) | 9.0      |
| 2     | TCK                  | No Connection, Internal Factory Programming Input.               | 8.0      |
| 3     | TDO                  | No Connection, Internal Factory Programming Input.               | 8.0      |
| 4     | REF <sub>A</sub>     | CMOS Reference Frequency Input.                                  |          |
| 5     | SEL <sub>AB</sub>    | Input Reference Select Pin. (REFA = 0, REFB = 1)                 | 9.0      |
| 6     | RESET                | RESET. (RESET = 1)   | 9.0      |
| 7     | REF <sub>B</sub>     | CMOS Reference Frequency Input.                                  |          |
| 8     | V <sub>ee</sub>      | Ground.  |          |
| 9     | FR <sub>status</sub> | Free Run Status. (FR = 1)  |          |
| 10    | V <sub>cc</sub>      | Supply Voltage relative to ground.                               |          |
| 11    | N/C                  | No Connection. (Optional Reference Output Available)             | 8.0, 8.1 |
| 12    | ALARM                | Loss of Reference / Lock alarm. (Alarm = 1)                      |          |
| 13    | FR                   | Force Free Run. (Phase Lock = 0, Free Run = 1)                   | 9.0      |
| 14    | TDI                  | No Connection, Internal Factory Programming Input.               | 8.0      |
| 15    | TMS                  | No Connection, Internal Factory Programming Input.               | 8.0      |
| 16    | QN                   | LVPECL Complementary Output.                                     |          |
| 17    | V <sub>ee</sub>      | Ground.  |          |
| 18    | Q                    | LVPECL Output.   |          |

**NOTES**

- 8.0 Do not connect pin
- 8.1 Contact a Sales Representative for availability and use of optional reference output
- 9.0 Input pulled to ground


## Circuit Board Footprint & Keepout Recommendations

Figure 6

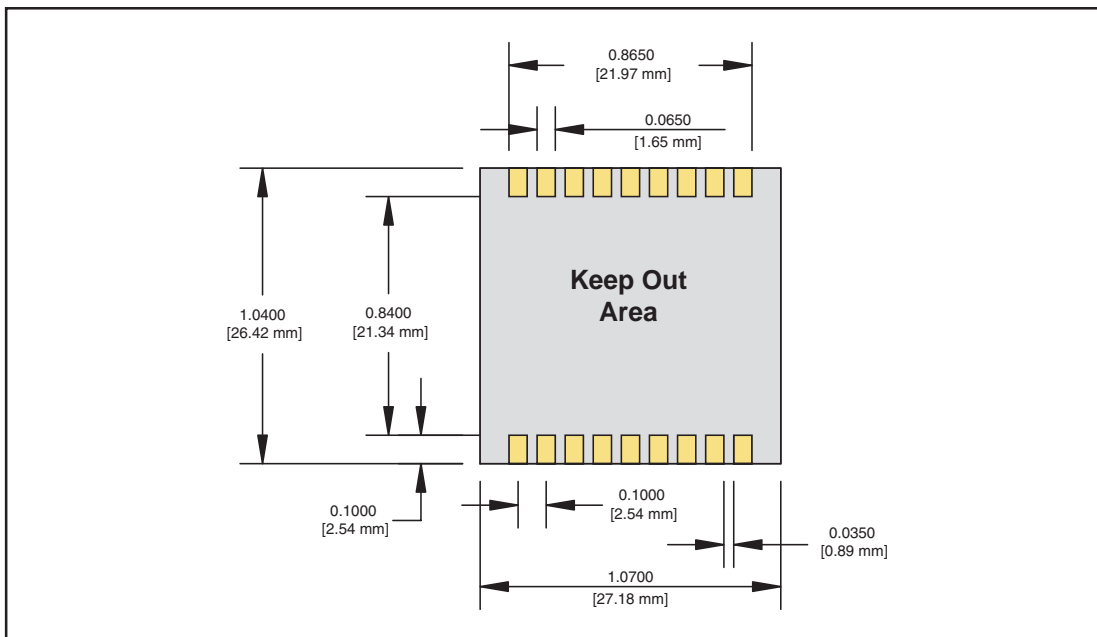

# Loss of Reference Condition Alarm Timing

Figure 7

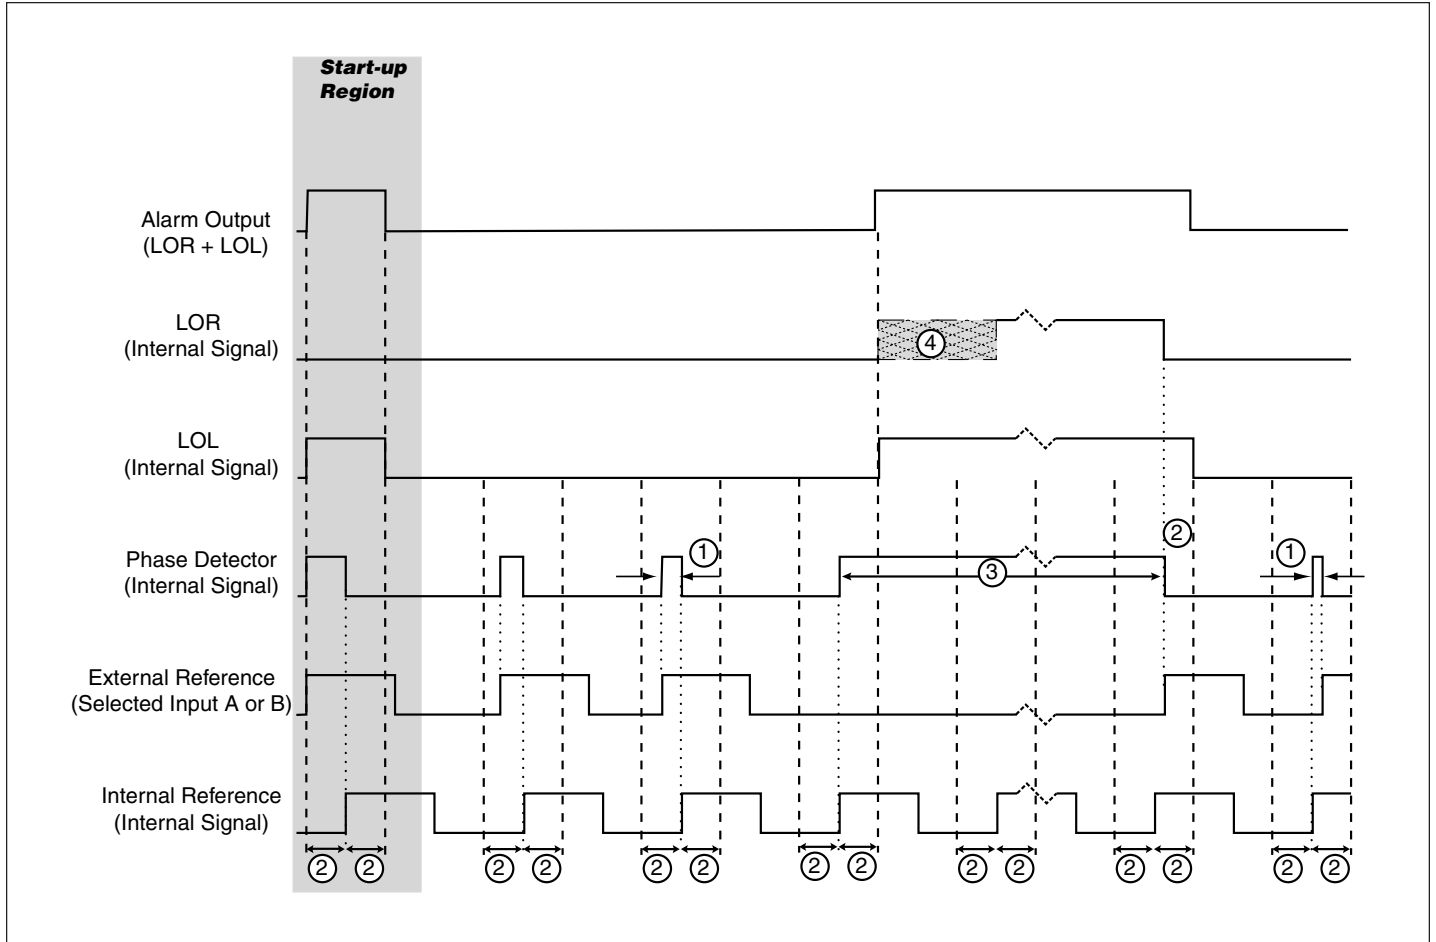

## Alarm Timing Legend

Use for all alarm timing diagrams


Table 7

|                 | 19.44 MHz Reference Input Units   | 8 kHz Reference Input Units          |
|-----------------|---|--------------------------------------|
| ①               | < 1 $\mu$ sec   | < 31.25 $\mu$ sec                    |
| ②               | 1 $\mu$ sec   | 31.25 $\mu$ sec                      |
| ③               | > 1 $\mu$ sec   | > 31.25 $\mu$ sec                    |
| ④               | LOR is active when LOL is active  | 125 $\mu$ sec wide range             |
| ⑤               | Minimum pulse width = 2 $\mu$ sec   | Minimum pulse width = 62.5 $\mu$ sec |
| Start-up Region | During Start-up, The LOL Alarm will pulse during the few seconds of operation |                                      |




# Loss of Lock Condition Alarm Timing

Figure 8

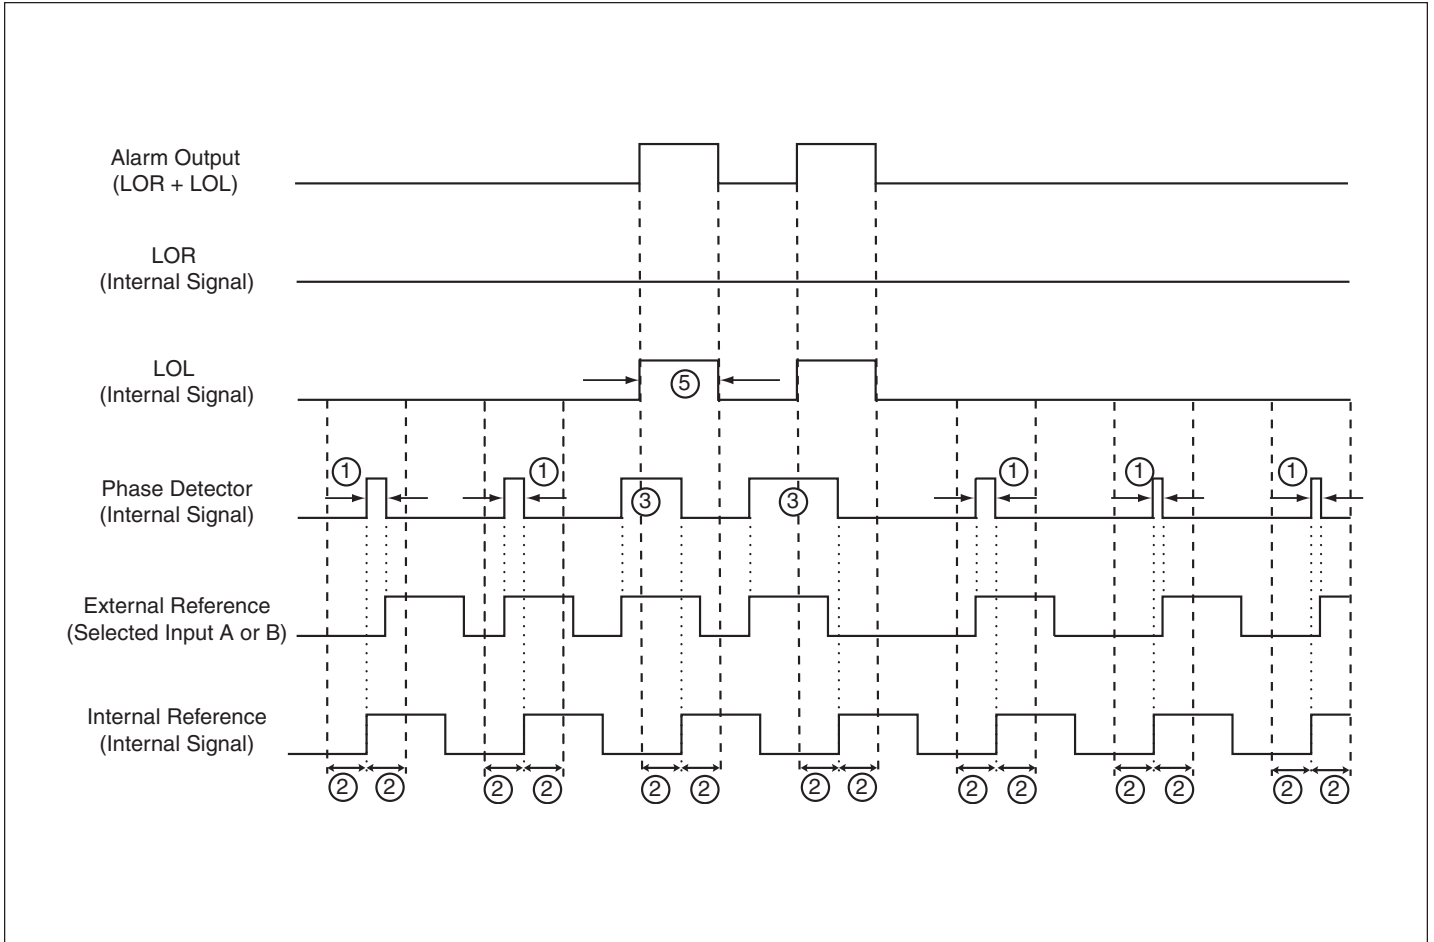


### Switch from A to B when both are good signals

Figure 9

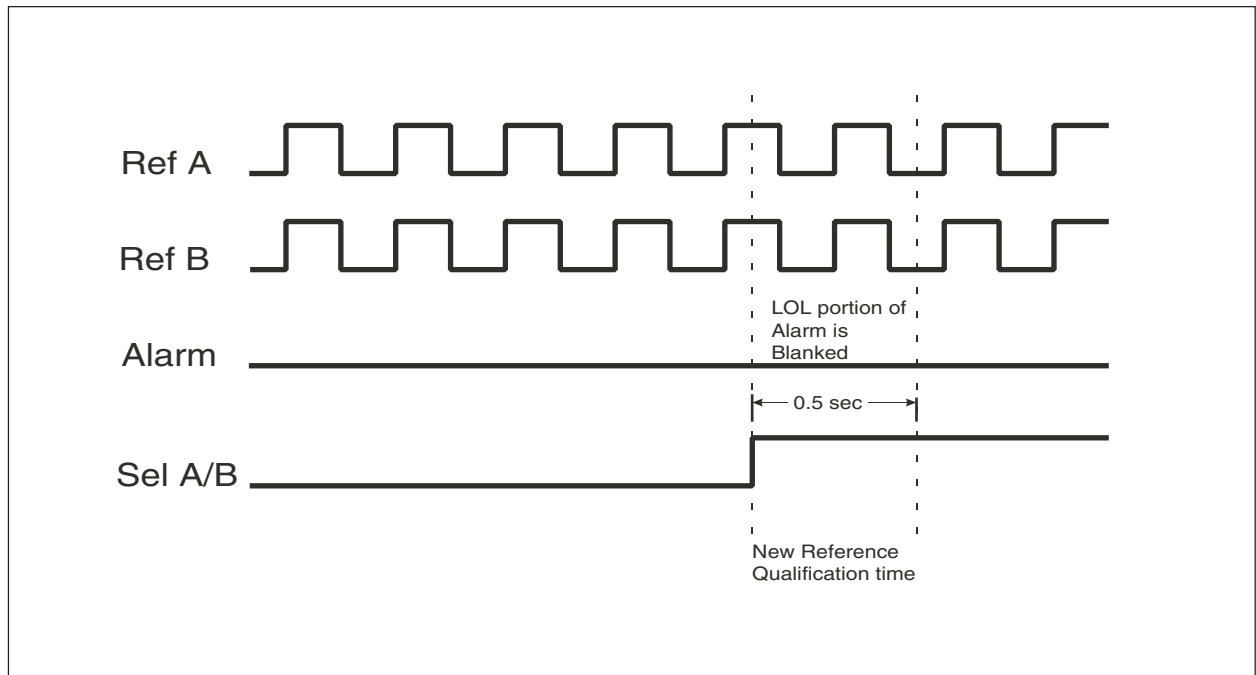


### Switch from A to B when Reference B is lost

Figure 10

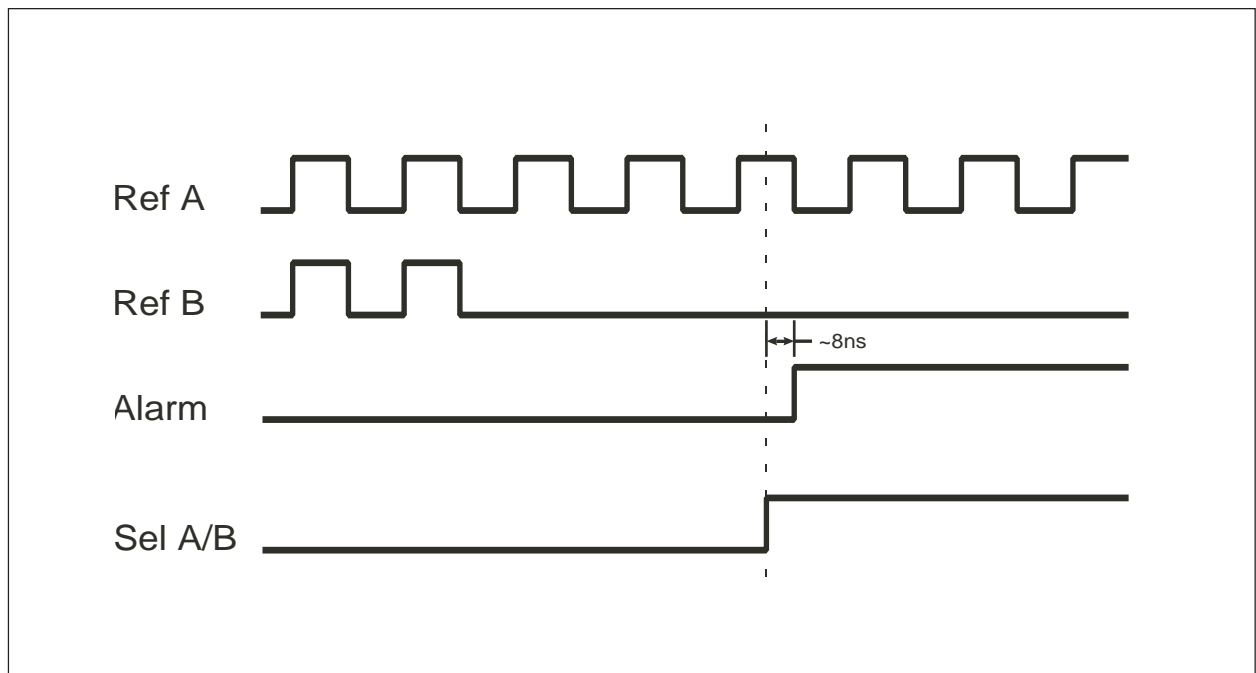


## Switch from A to B after Reference A is lost

Figure 11

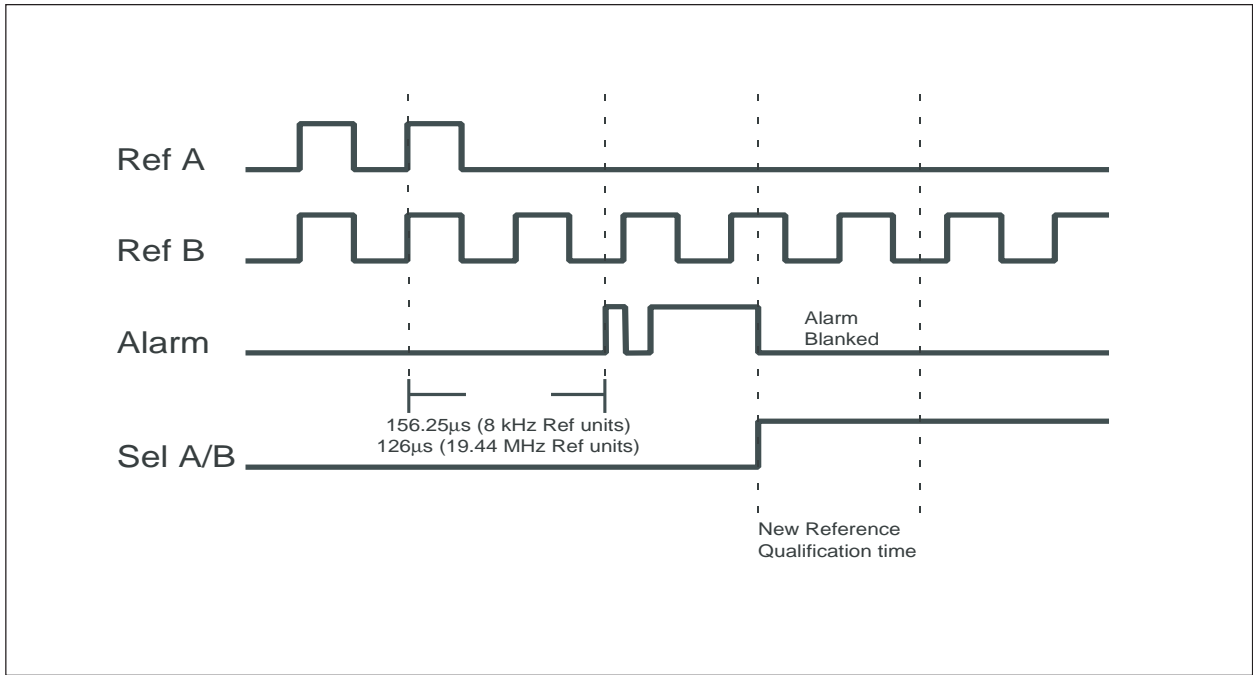


## Switch from A to B when A is out of range

Figure 12

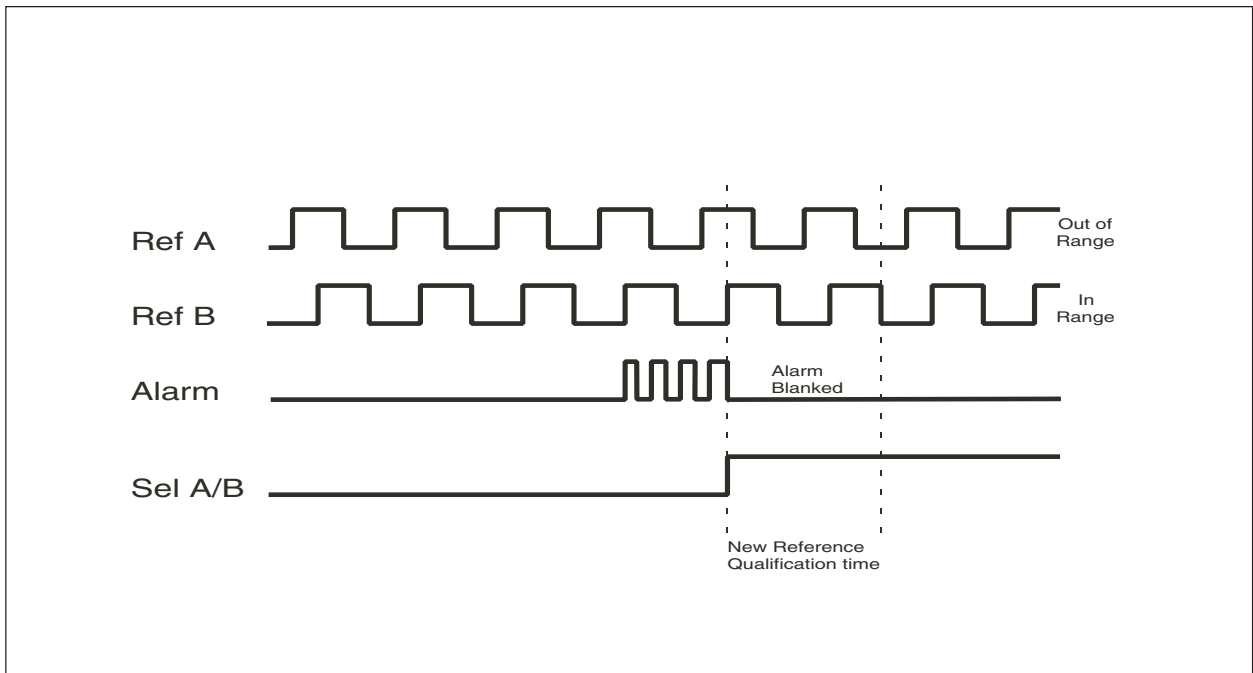


### Switch from A to B when B is out of range

Figure 13

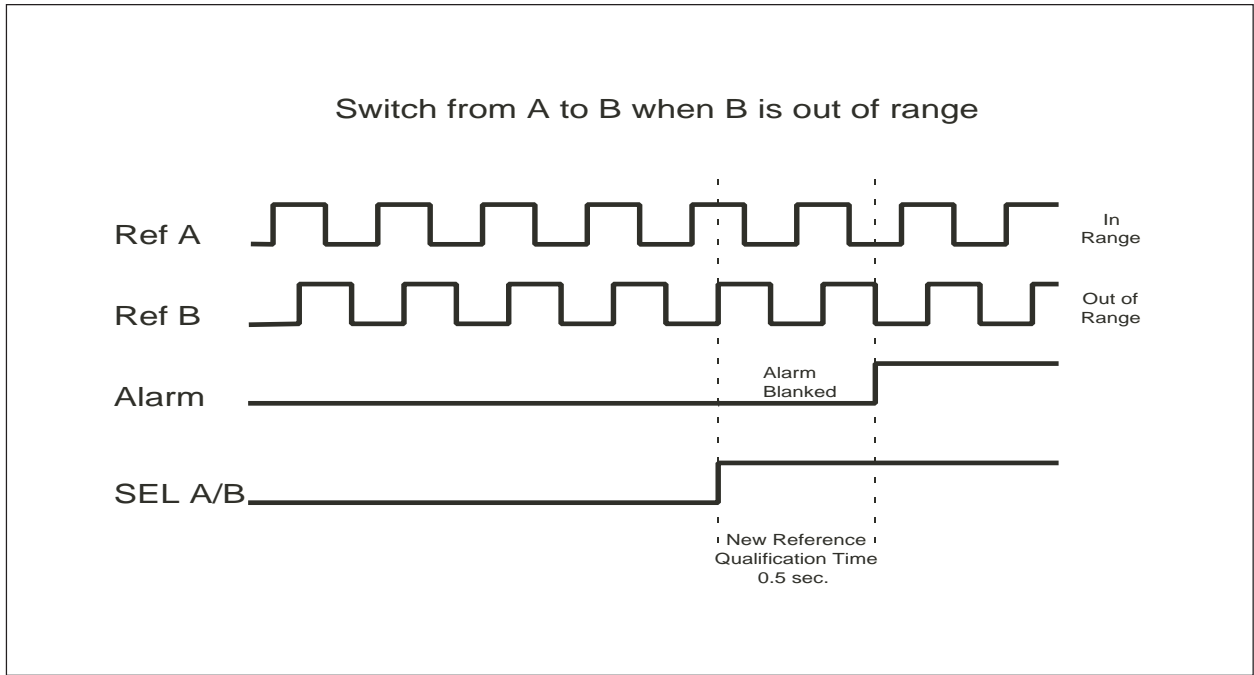


### Switch from A to B when B is out of range

Figure 14

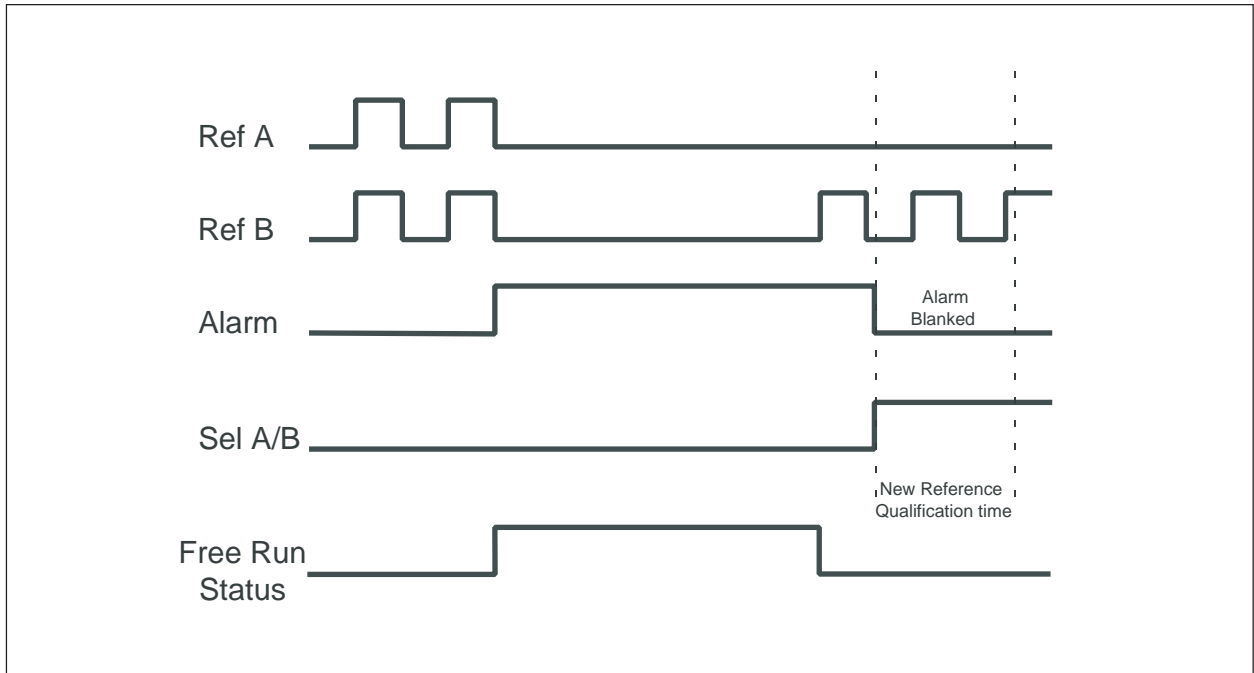

## Recommended PECL Termination


Figure 15

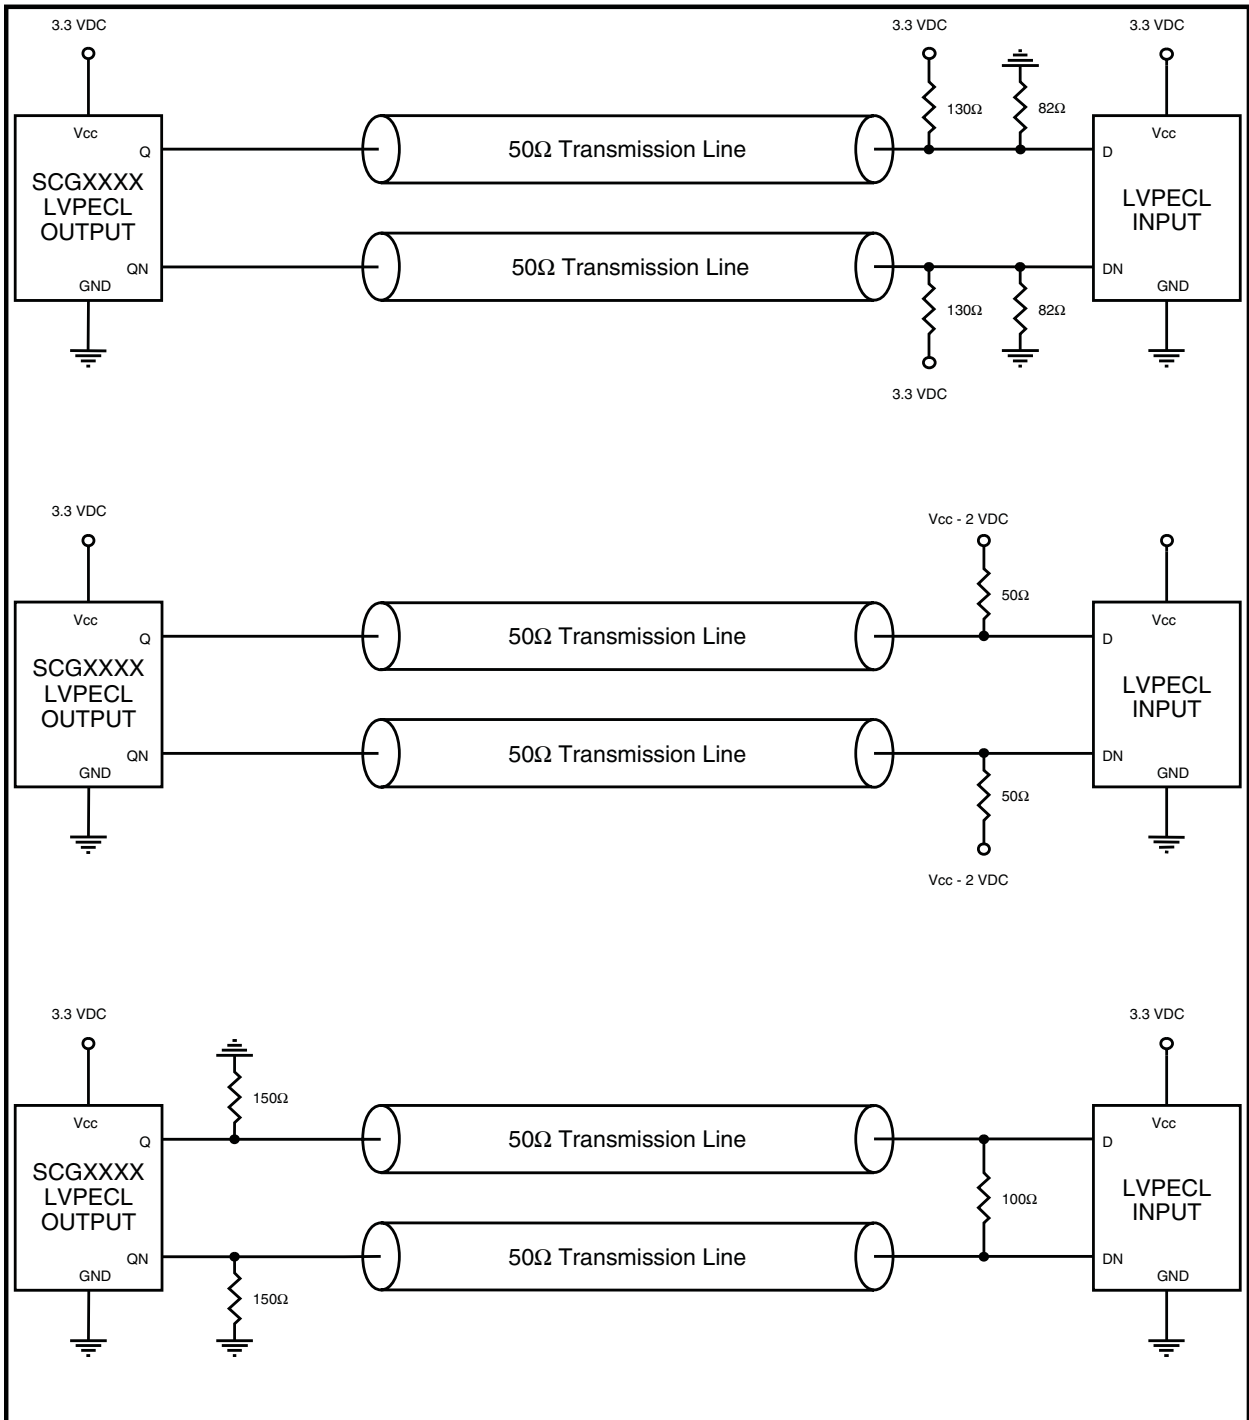

If PECL outputs do not drive a long line (< 0.5"), a single 150Ω termination resistor to ground may be used for each pin.


# Tape and Reel Packaging

Figure 16

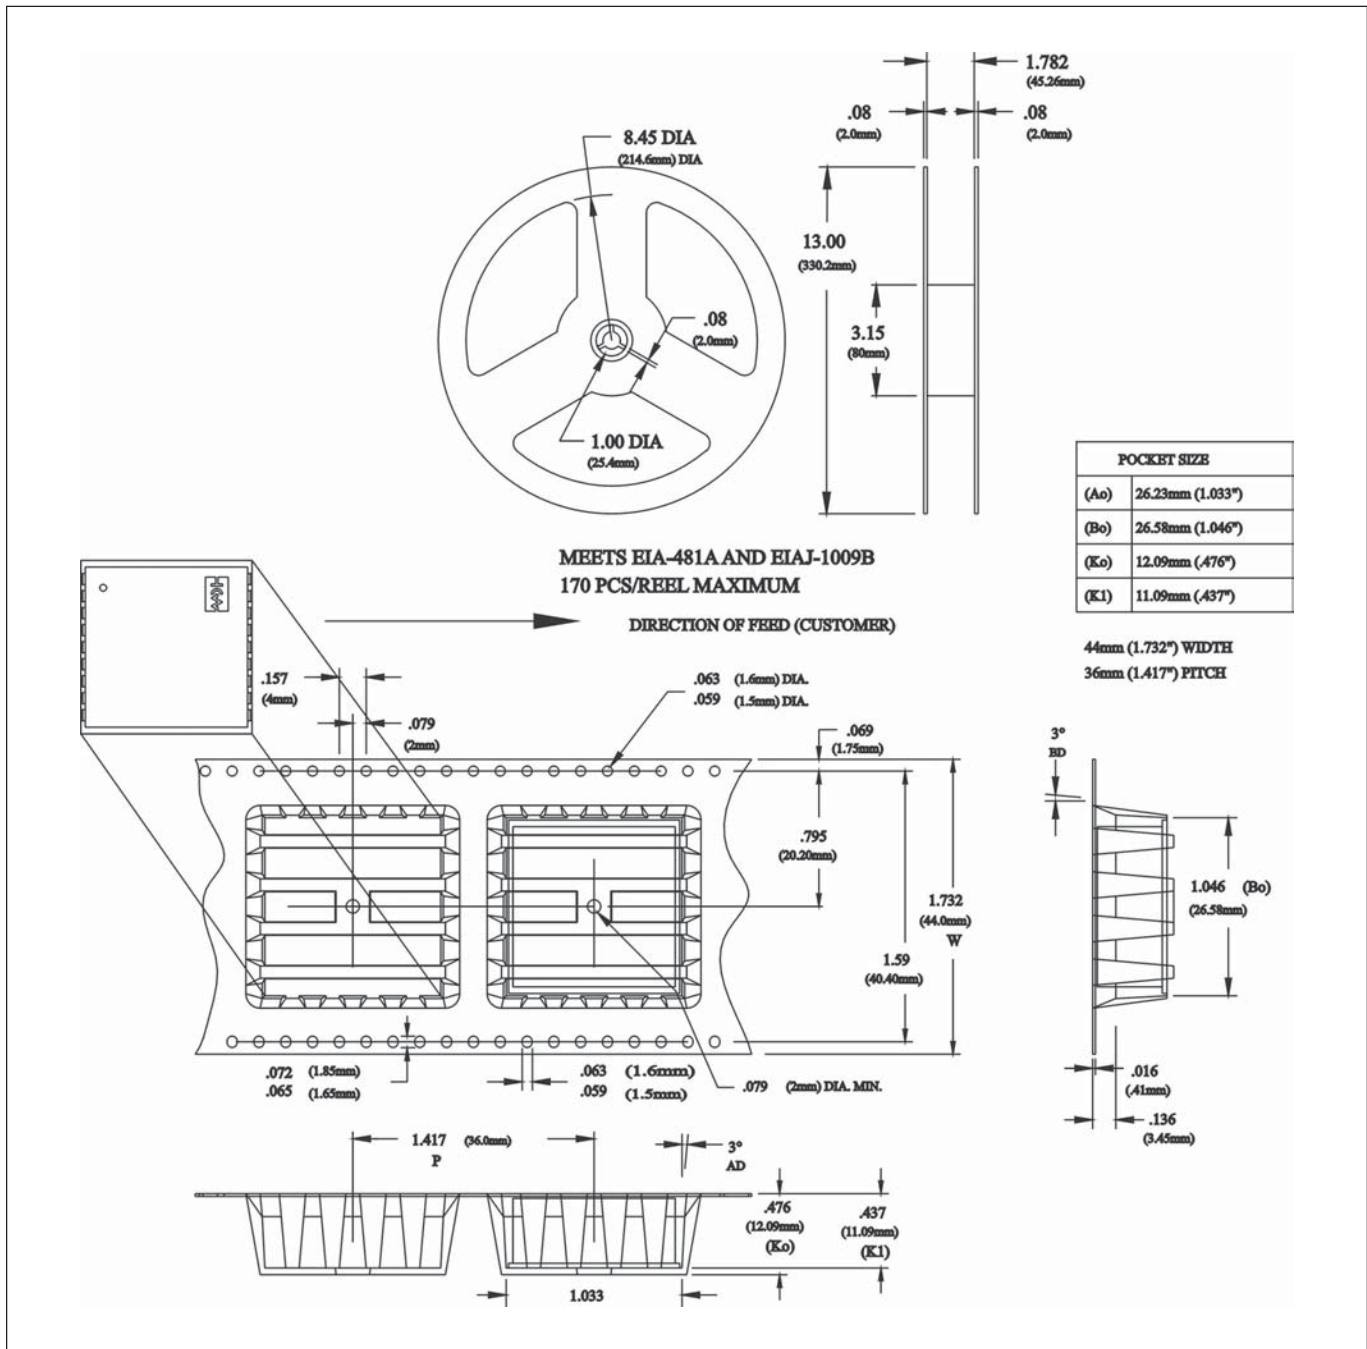

## Solder Profile

Figure 17

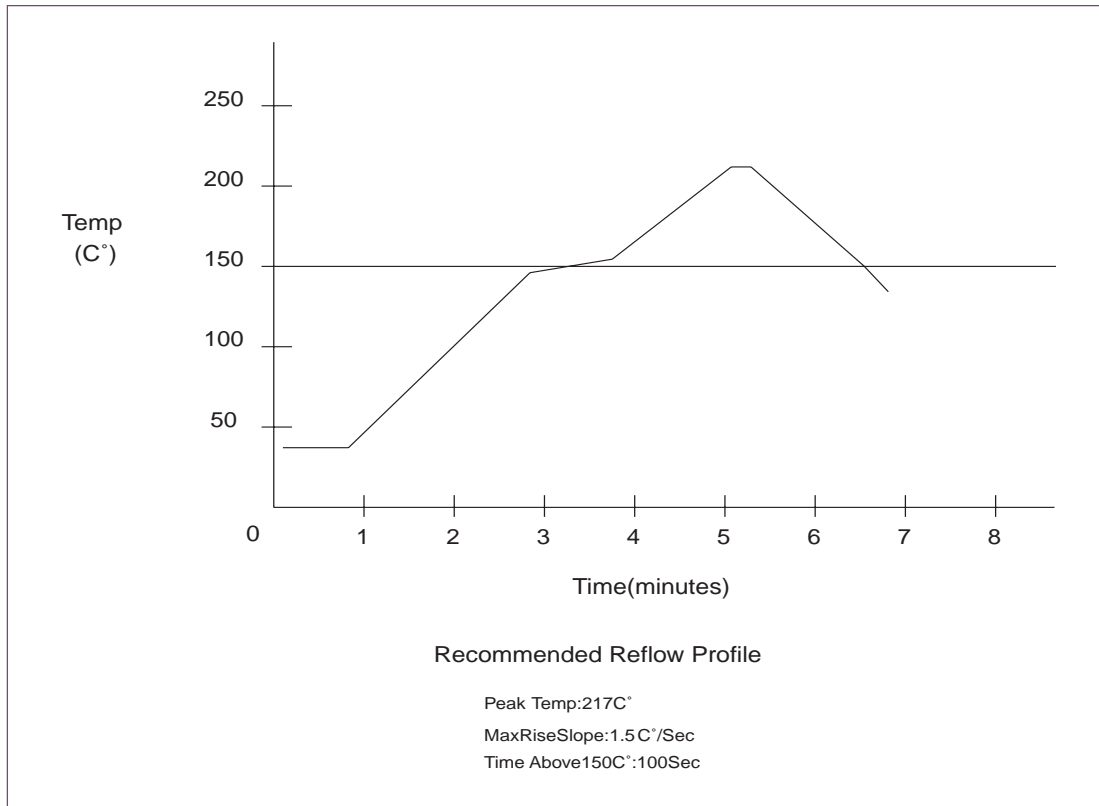

## Model Comparison Table

Table 8

| Model   | Input Ref Freq     | Max Duty Cycle | Oscillator Output (Synchronized Output) | Notes                        |
|---------|--------------------|----------------|---|------------------------------|
| SCG4500 | 8 kHz/8 kHz        | 40/60          | 77.76 MHz, 155.52 MHz, 125 MHz          | Basic Model                  |
| SCG4501 | 8 kHz/8 kHz        | 40/60          | 77.76 MHz, 155.52 MHz, 125 MHz          | <b>±32 ppm Pull-in range</b> |
| SCG4510 | <b>2@1.544 MHz</b> | 40/60          | 155.52 MHz                              |                              |
| SCG4520 | <b>2@19.44 MHz</b> | 40/60          | 77.76 MHz, 155.52 MHz                   |                              |
| SCG4540 | <b>2@10 kHz</b>    | 40/60          | <b>163.84 MHz</b>                       |                              |

### Other low jitter line card solutions from Connor-Winfield

|                       |  |
|-----------------------|--|
| <b>SCG51 Series</b>   | Single input, jitter filtered with Free Run, 1 CMOS and 3 LVPECL outputs up to 622.08 MHz.   |
| <b>SCG102A/104A</b>   | Single input, frequency selectable, LVPECL clock smoothers from 77.76 to 777.76 MHz.         |
| <b>SCG2000 Series</b> | Single input, jitter filtered with 20ppm Free Run, CMOS outputs from 8 kHz to 125.0 MHz.     |
| <b>SCG2500 Series</b> | Dual input, jitter filtered with Free Run, CMOS outputs from 8 kHz to 125.0 MHz.             |
| <b>SCG3000 Series</b> | Single input, jitter filtered with Dual LVPECL outputs.                                      |
| <b>SCG4000 Series</b> | Single input, jitter filtered with 20ppm Free Run, LVPECL outputs from 77.76 MHz to 180 MHz. |
| <b>SCG4600 Series</b> | Dual input, jitter filtered with Free Run, 1 CML differential pair output up to 622.08 MHz.  |

| <b>Revision</b> | <b>Revision Date</b> | <b>Note</b>         |
|-----------------|----------------------|---------------------|
| P00             | 12/20/01             | Preliminary Release |
| P01             | 11/13/03             | Updated to V3.01    |