


# MIHW1000 Series

3W, Wide Input Range DIP, Single & Dual Output DC/DC Converters

## Key Features




- Efficiency up to 84%
- Isolation 5600VDC
- MTBF > 1,000,000 Hours
- 2:1 Wide Input Range
- Complies With EN55022 Class B
- All I/O Clearance and Creepage Distance
- 2.0 mm Min.
- Temperature Performance -40°C to +75°C
- Low Leakage Current
- Low Isolation Capacitance
- CSA60950-1 Safety Approval
- Industry Standard Pinout
- Short Circuit Protection




Low Profile



EN55022



I/O Isolation



Wide Range

Minmax's MIHW1000-Series power modules are specially designed to provide ultra-high levels of isolation 5600VDC in a low profile 24-pin DIP package. Operating input voltage ranges of 4.5–9VDC, 9–18VDC, 18–36VDC and 36–75VDC which provide precisely regulated output voltages of 5V, 12V, 24V, ±12V and ±15VDC.

The -40°C to +75°C operating temperature range makes it ideal for data communication equipments, mobile battery driven equipments, distributed power systems, telecommunication equipments, mixed analog/digital subsystems, process/machine control equipments, computer peripheral systems and industrial robot systems.

The modules have a maximum power rating of 3W and a typical full-load efficiency of 84%, continuous short circuit, EN55022 Class B conducted noise compliance minimize design-in time, cost and eliminate the need for external filtering.

## Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Input Surge Voltage ( 1000 mS )	5VDC Input Models	-0.7	11	VDC
	12VDC Input Models	-0.7	25	VDC
	24VDC Input Models	-0.7	50	VDC
	48VDC Input Models	-0.7	100	VDC
Lead Temperature (1.5mm from case for 10 Sec.)		---	260	°C
Internal Power Dissipation		---	2,500	mW

## Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature	Ambient	-40	+75	°C
Operating Temperature	Case	-40	+95	°C
Storage Temperature		-40	+125	°C
Humidity		---	+95	%
Cooling	Free-Air Convection			
Conducted EMI	EN55022 Class B			

Exceeding the absolute maximum ratings of the unit could cause damage.  
These are not continuous operating ratings.

## Model Selection Guide

Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Efficiency
			Max.	Min.	@Max. Load	@No Load		
			VDC	VDC	mA	mA	mA (Typ.)	mA (Typ.)
MIHW1002	5 (4.5 ~ 9)	5	600	90	857	800	40	60
MIHW1003		12	250	37.5	800	800		
MIHW1008		24	125	18.8	800	800		
MIHW1006		±12	±125	±18.8	800	800		
MIHW1007		±15	±100	±15	800	800		
MIHW1012		5	600	90	338	338		
MIHW1013		12	250	37.5	313	313		
MIHW1018		24	125	18.8	313	313		
MIHW1016		±12	±125	±18.8	313	313		
MIHW1017		±15	±100	±15	313	313		
MIHW1022	12 (9 ~ 18)	5	600	90	160	160	30	30
MIHW1023		12	250	37.5	151	151		
MIHW1028		24	125	18.8	151	151		
MIHW1026		±12	±125	±18.8	151	151		
MIHW1027		±15	±100	±15	151	151		
MIHW1032	24 (18 ~ 36)	5	600	90	80	80	20	15
MIHW1033		12	250	37.5	75	75		
MIHW1038		24	125	18.8	75	75		
MIHW1036		±12	±125	±18.8	75	75		
MIHW1037		±15	±100	±15	75	75		
MIHW1032	48 (36 ~ 75)	5	600	90	80	80	10	10
MIHW1033		12	250	37.5	75	75		
MIHW1038		24	125	18.8	75	75		
MIHW1036		±12	±125	±18.8	75	75		
MIHW1037		±15	±100	±15	75	75		

## Capacitive Load

Models by Vout	5V	12V	24V	±12V	±15V	Unit
Maximum Capacitive Load	1000	470	470	220	220	uF

# For each output

## Input Fuse Selection Guide

5V Input Models	12V Input Models	24V Input Models	48V Input Models
2000mA Slow - Blow Type	1000mA Slow - Blow Type	500mA Slow - Blow Type	250mA Slow - Blow Type

# MIHW1000 Series

---

## **Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	3.7	4	4.5	VDC
	12V Input Models	8	8.5	9	
	24V Input Models	15	17	18	
	48V Input Models	30	33	36	
Under Voltage Shutdown	5V Input Models	---	---	4	
	12V Input Models	---	---	8.5	
	24V Input Models	---	---	17	
	48V Input Models	---	---	34	
Reverse Polarity Input Current	All Models	---	---	0.3	A
Short Circuit Input Power		---	---	2000	mW
Input Filter		Pi Filter			

## **Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	$\pm 0.5$	$\pm 1.0$	%
Output Voltage Balance	Dual Output, Balanced Loads	---	$\pm 0.5$	$\pm 2.0$	%
Line Regulation	$V_{in} = \text{Min. to Max.}$	---	$\pm 0.3$	$\pm 0.5$	%
Load Regulation	$I_{o} = 100\% \text{ to } 25\%$	---	$\pm 0.5$	$\pm 1.0$	%
Ripple & Noise (20MHz)	5V Output Models	---	75	100	mVP-P
	Other Output Models	---	100	150	mVP-P
Ripple & Noise (20MHz)	Over Line, Load & Temp.	---	---	180	mVP-P
Ripple & Noise (20MHz)		---	---	15	mVrms
Over Power Protection		120	---	---	%
Transient Recovery Time	25% Load Step Change	---	150	500	uS
Transient Response Deviation		---	$\pm 3$	$\pm 6$	%
Temperature Coefficient		---	$\pm 0.02$	$\pm 0.05$	%/°C
Output Short Circuit	Continuous				


## **General Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage Rated	60 Seconds	5600	---	---	VDC
Isolation Voltage Test	Flash Tested for 1 Second	6000	---	---	VDC
Leakage Current	240VAC, 60Hz	---	---	2	uA
Isolation Resistance	500VDC	1000	---	---	MΩ
Isolation Capacitance	100KHz, 1V	---	7	13	pF
Switching Frequency		---	150	---	KHz
MTBF	MIL-HDBK-217F @ 25°C, Ground Benign	1000	---	---	K Hours


## Notes :


1. Specifications typical at  $T_a=+25^{\circ}\text{C}$ , resistive load, nominal input voltage, rated output current unless otherwise noted.
2. Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
3. Ripple & Noise measurement bandwidth is 0–20 MHz.
4. These power converters require a minimum output loading to maintain specified regulation.
5. Operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
6. All DC/DC converters should be externally fused at the front end for protection.
7. Other input and output voltage may be available, please contact factory.
8. Specifications subject to change without notice.

## Block Diagram

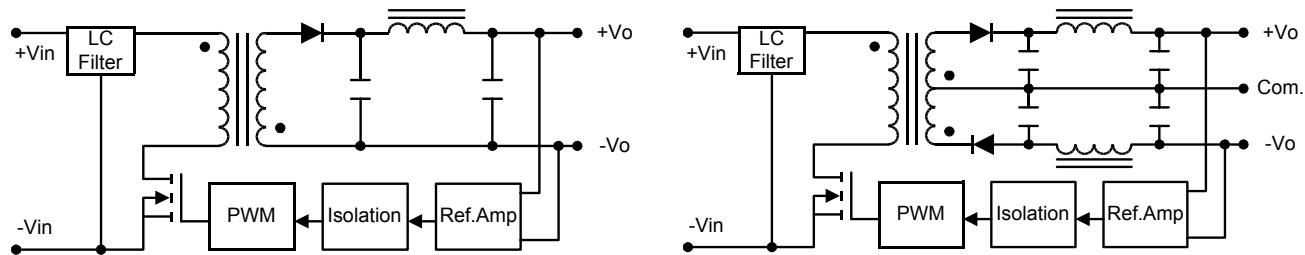


## Input Voltage Transient Rating

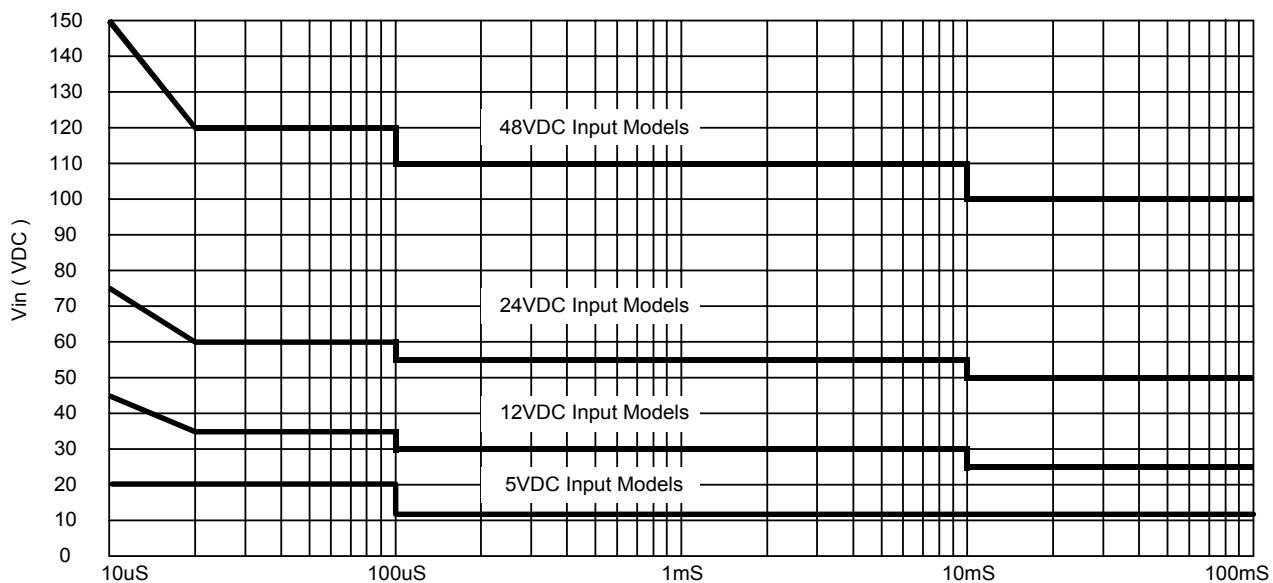


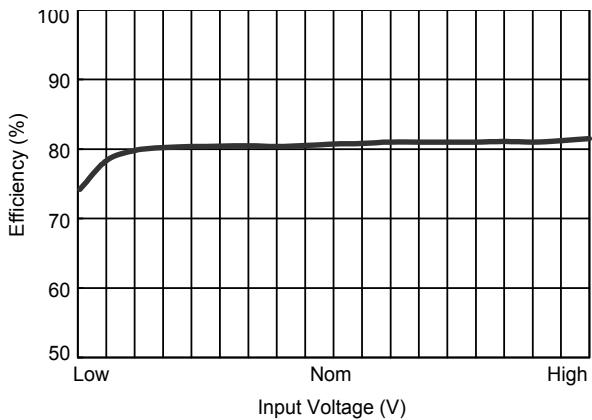


**Efficiency vs Input Voltage ( Single Output )**

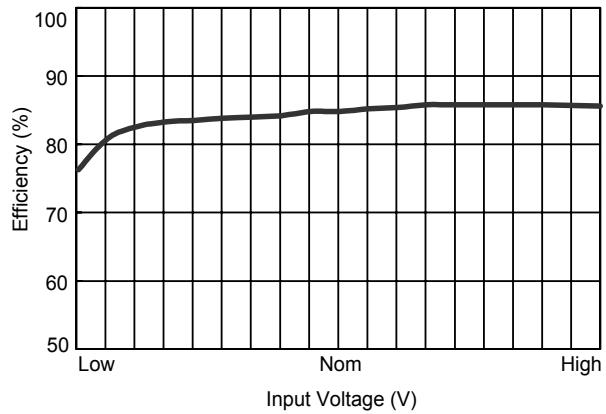


**Efficiency vs Input Voltage ( Dual Output )**

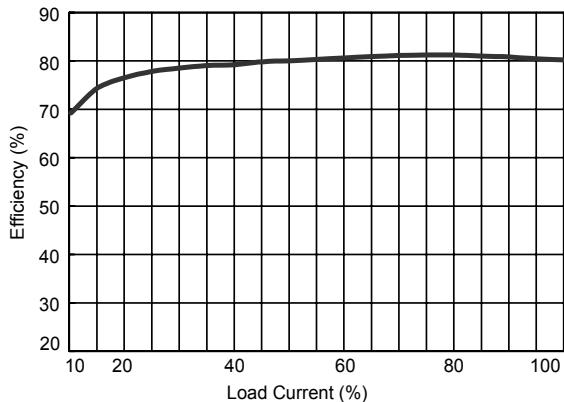

**Efficiency vs Output Load ( Single Output )**

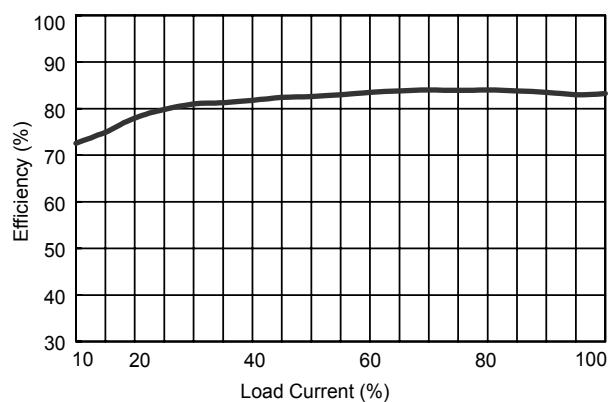

**Efficiency vs Output Load ( Dual Output )**

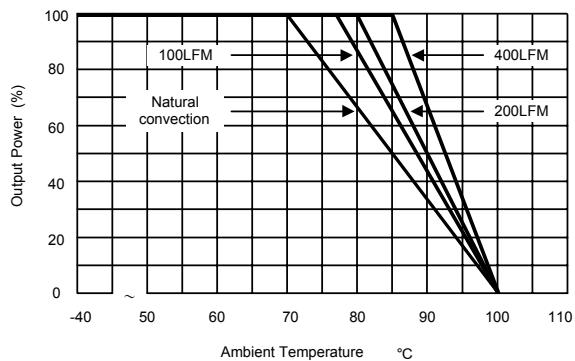

**Derating Curve**


## Test Configurations

### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with a inductor Lin (4.7uH) and Cin (220uF, ESR < 1.0Ω at 100 kHz) to simulated source impedance.

Capacitor Cin, offsets possible battery impedance.



Current ripple is measured at the input terminals of the module, measurement bandwidth is 0–500KHz.

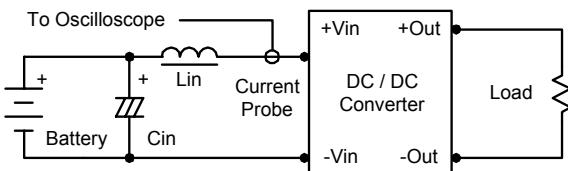

### Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.47uF ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0–20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

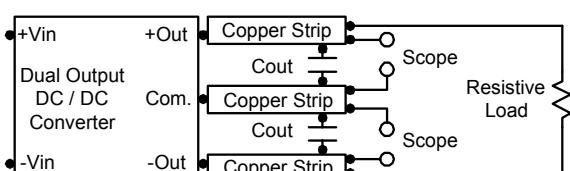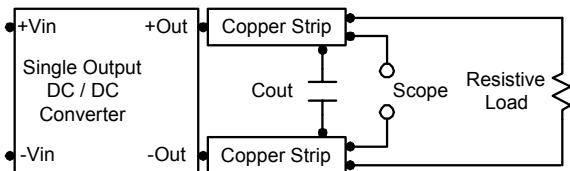

## Design & Feature Considerations

### Maximum Capacitive Load

The MIHW1000 series has limitation of maximum connected capacitance on the output.

The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time.

Connect capacitors at the point of load for best performance.

The maximum capacitance can be found in the data sheet.

## Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.



In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 10uF for the 5V input devices and a 4.7uF for the 12V input devices and 2.2uF for the 24V and 48V devices.

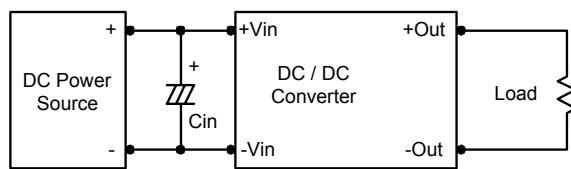

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.

To reduce output ripple, it is recommended that 3.3uF capacitors are used on output.

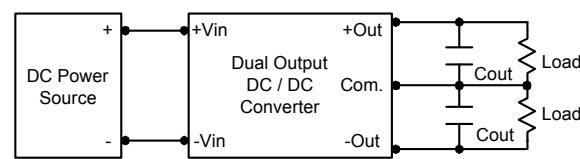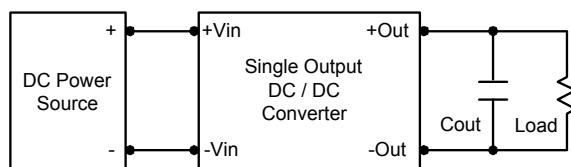


# MIHW1000 Series

---


## Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C.

The derating curves were determined from measurements obtained in an experimental apparatus.

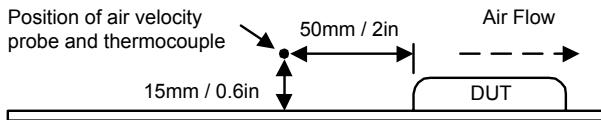

## Mechanical Dimensions

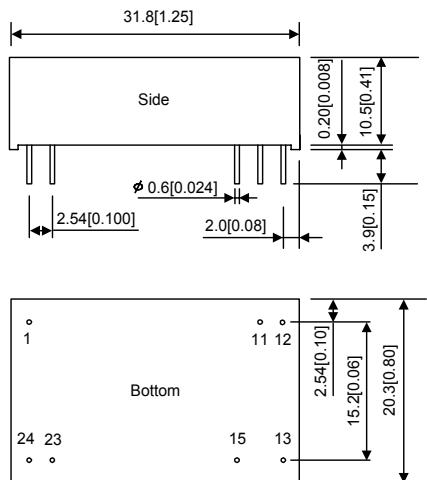

## Physical Characteristics

<b>Case Size</b>	: 31.8×20.3×10.7 mm 1.25×0.8×0.42 inches
<b>Case Material</b>	: Non-Conductive Black Plastic
<b>Weight</b>	: 16.2g
<b>Flammability</b>	: UL94V-0

<b>Tolerance</b>	<b>Millimeters</b>	<b>Inches</b>
	X.X±0.25	X.XX±0.01
	X.XX±0.13	X.XXX±0.005
<b>Pin</b>	<b>±0.05</b>	<b>±0.002</b>

## Pin Connections

<b>Pin</b>	<b>Single Output</b>	<b>Dual Output</b>
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin