

Specification


LX130 . LX133

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)
 Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.



- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.
- Galvanized wall mounting pressure plate for ease of installation and quick access for maintenance.

- 1 - Cast aluminum plate . Secures to the wall with an 11 ga. galvanized mounting plate.
- 2 - One piece copper free cast aluminum pyramid housing.
- 3 - White translucent high impact frosted acrylic triangular lens diffuser.
- 4 - Stainless steel captive hexagonal cap screws.

LX130: Quad. triangular open front luminaire housing
LX133: Triple. triangular open front luminaire housing

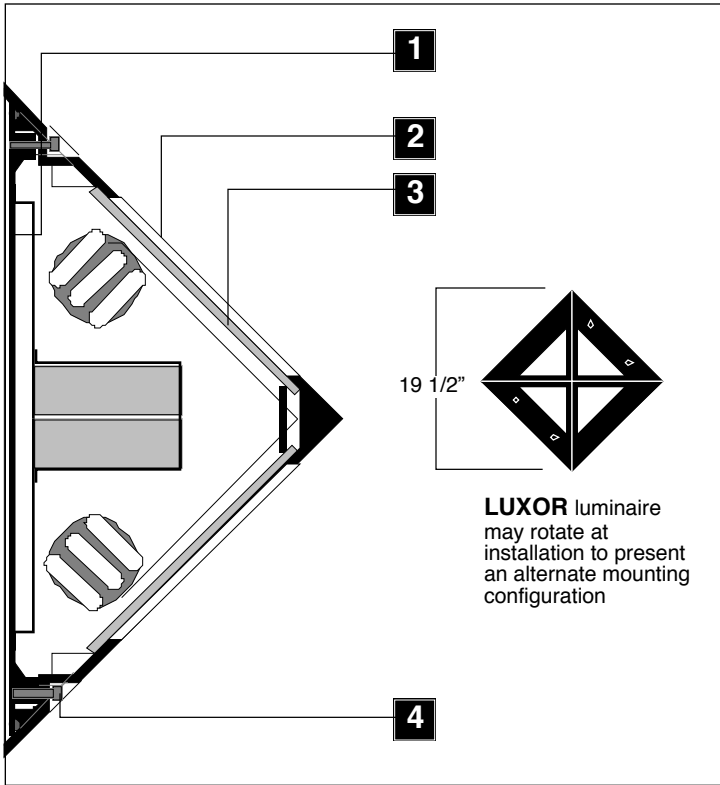

LUXOR luminaire may rotate at installation to present an alternate mounting configuration

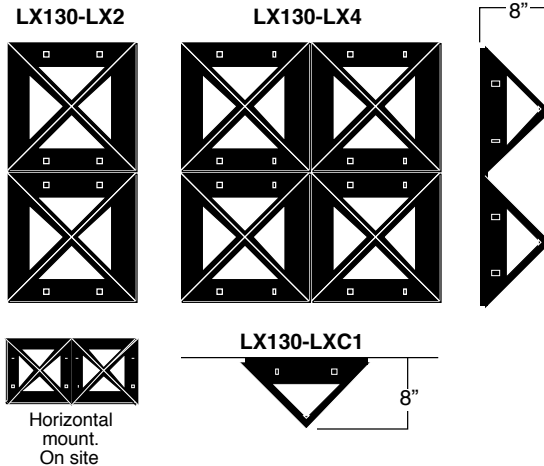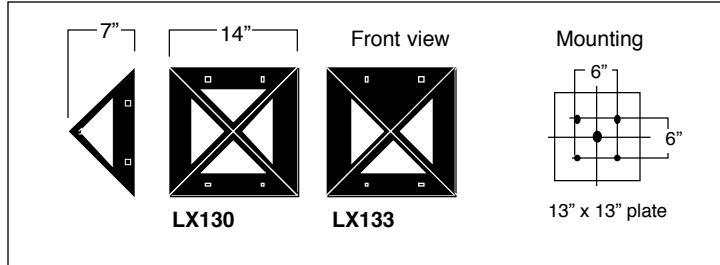

Certification





UL. Wet Location.

Mounting

Max.weight: 9 lbs.
 Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes. (by others) additional separate mounting holes are provided with wall plate.




Model#	Light source selection	Voltage	Finish	Options																		
<input type="checkbox"/> LX130 <input type="checkbox"/> LX133	<table border="0"> <tr> <td>CF (Gx24q)</td> <td>CF (Gx24q)</td> </tr> <tr> <td>Single lamp</td> <td>Two lamp</td> </tr> <tr> <td><input type="checkbox"/> F118</td> <td><input type="checkbox"/> F213</td> </tr> <tr> <td><input type="checkbox"/> F126</td> <td><input type="checkbox"/> F218</td> </tr> <tr> <td><input type="checkbox"/> F132</td> <td><input type="checkbox"/> F226</td> </tr> <tr> <td><input type="checkbox"/> F142</td> <td><input type="checkbox"/> F232</td> </tr> <tr> <td></td> <td><input type="checkbox"/> F242</td> </tr> <tr> <td></td> <td>Incand. A19</td> </tr> <tr> <td></td> <td><input type="checkbox"/> A100</td> </tr> </table> <p>(Lamps by others)</p>	CF (Gx24q)	CF (Gx24q)	Single lamp	Two lamp	<input type="checkbox"/> F118	<input type="checkbox"/> F213	<input type="checkbox"/> F126	<input type="checkbox"/> F218	<input type="checkbox"/> F132	<input type="checkbox"/> F226	<input type="checkbox"/> F142	<input type="checkbox"/> F232		<input type="checkbox"/> F242		Incand. A19		<input type="checkbox"/> A100	<p>120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number.</p> <p>COMP. FLUO. Smart ballast 120/277 <input type="checkbox"/> 347 V (To specify)</p>	<p>(Refer to color chart) <u>Standard selection</u></p> <p><input type="checkbox"/> WHT:Snow white <input type="checkbox"/> BKT: Jet black <input type="checkbox"/> BZT: Bronze <input type="checkbox"/> GRT: Titanium gray <input type="checkbox"/> DGT: Gun metal <input type="checkbox"/> CHT: Champagne <input type="checkbox"/> MST: Matte silver <input type="checkbox"/> GNT: Forest green</p> <p><u>Optional colors</u></p> <p><input type="checkbox"/> CS: Custom color <input type="checkbox"/> RAL: RAL# color</p>	<p><u>Accessories</u></p> <p><input type="checkbox"/> LX2: Twin mount wall adaptor. <input type="checkbox"/> LX4: Quad mount wall adaptor. <input type="checkbox"/> LXC1: Single luminaire ceiling adaptor</p> <p>Above listed optional mounting accessories are available with LX130 only.</p>
CF (Gx24q)	CF (Gx24q)																					
Single lamp	Two lamp																					
<input type="checkbox"/> F118	<input type="checkbox"/> F213																					
<input type="checkbox"/> F126	<input type="checkbox"/> F218																					
<input type="checkbox"/> F132	<input type="checkbox"/> F226																					
<input type="checkbox"/> F142	<input type="checkbox"/> F232																					
	<input type="checkbox"/> F242																					
	Incand. A19																					
	<input type="checkbox"/> A100																					

luminaires may be altered for design improvements or discontinued without prior notice.

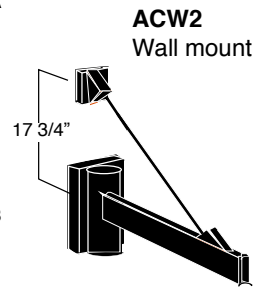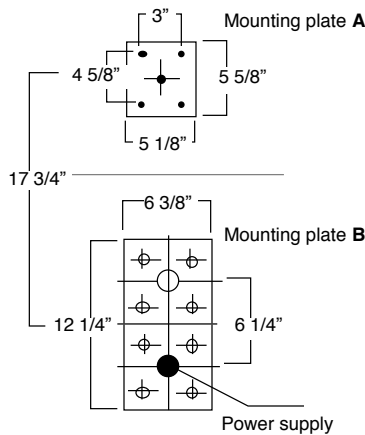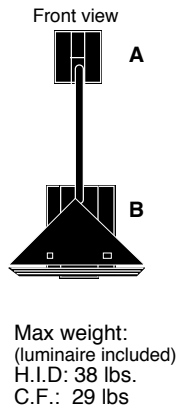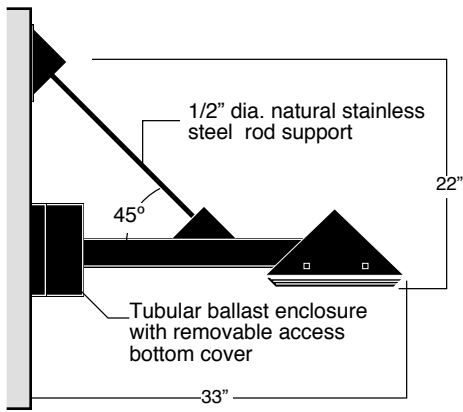

LX120-ACW2 Compact fluorescent
LX124-ACW2 H.I.D

Extruded aluminum wall mounted adaptor . 5" dia.x 12 3/4" lg. tubular ballast enclosure with removable cover for access to ballast tray. Cast aluminum wall mounted plate. 1/2" dia.stainless steel rod support. Extruded arm and all other parts are painted same color as luminaire .

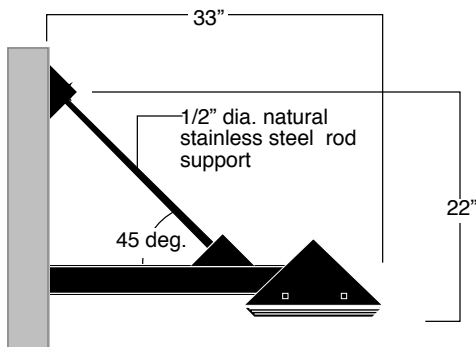


LX150-PC Compact fluorescent
LX150-PH H.I.D

E.P.A.: .74
Extruded aluminum side pole mounting adaptor. 2" X 4" Extruded arm and all other parts are painted same color as luminaire..

LX120-ACA2 Compact fluorescent
LX124-ACA2 H.I.D

E.P.A.: 2.0
Extruded aluminum side pole mounting adaptor. 1/2" dia. stainless steel natural rod support. Extruded arm and all other parts are painted same color as luminaire.

* Note: 36" extension with ACA2 attachment
24" extension with LX150PC / LX150PH attachment

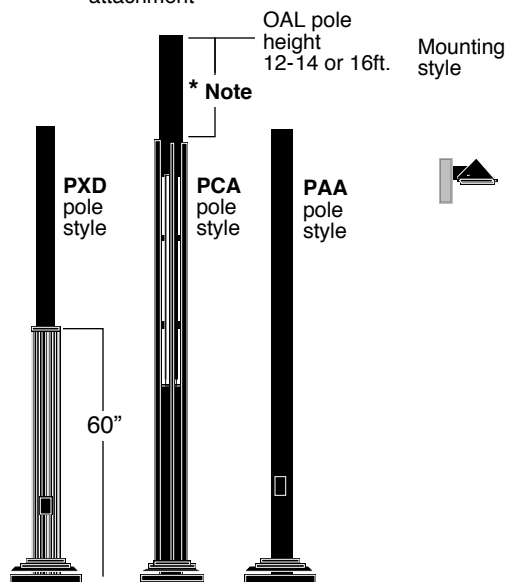

Compatible poles listing.

Post side mount for LX150PC
(For Luxor Compact Fluorescent.)

4"O.D.	5"O.D.	4"O.D.	4"O.D.
PAA410-APC	PAA510-APC		PXD10-APC
PAA412-APC	PAA512-APC	PCA12-APC	PXD12-APC
PAA414-APC	PAA514-APC	PCA14-APC	PXD14-APC
PAA416-APC	PAA516-APC	PCA16-APC	PXD16-APC
PAA418-APC	PAA518-APC		PXD18-APC
PAA420-APC	PAA520-APC		PXD20-APC

Post side mount for LX150PH
(For Luxor HID.)

5"O.D.	Pole height
PAA510-APC	10 ft
PAA512-APC	12 ft
PAA514-APC	14 ft
PAA516-APC	16 ft
PAA518-APC	18 ft
PAA520-APC	20 ft

Post side mount with ACA2 attachment accessory

Post top mounting for LX120-ACA2 and LX124-ACA2

PAA514-ACA	14 ft
PAA516-ACA	16 ft
PAA518-ACA	18 ft
PAA520-ACA	20 ft

For poles details and specification, please refer to pages 140 to 144

luminaires may be altered for design improvements or discontinued without prior notice.