

TLP557

GaAs IRED & PHOTO-IC

(TLP557)

TRANSISTOR INVERTOR
 INVERTER FOR AIR CONDITIONOR
 POWER TRANSISTOR BASE DRIVE

The TOSHIBA TLP557 consists of a GaAs light emitting diode and a integrated photodetector.

This unit is 8-lead DIP package.


TLP557 is suitable for base driving circuit of power transistor module up to 20A.

External resistor needs to connect between pin 6 and pin 7.


This is for constant current driving.

- Input Threshold Current : $I_F = 5\text{mA (Max.)}$
- Guaranteed Performance Temperature Range : $-30 \sim 70^\circ\text{C}$
- Supply Voltage : 16V (Max.)
- Output Current : $\pm 0.3\text{A (Max.)}$
- Switching Time (t_{pLH} / t_{pHL}) : $5\mu\text{s (Max.)}$
- Isolation Voltage : $2500\text{V}_{\text{rms (Min.)}}$
- UL Recognized : UL1577, File No. E67349

SCHMATIC

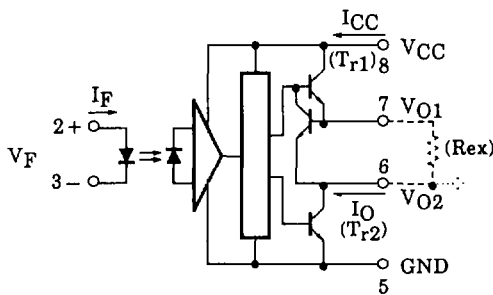


Unit in mm

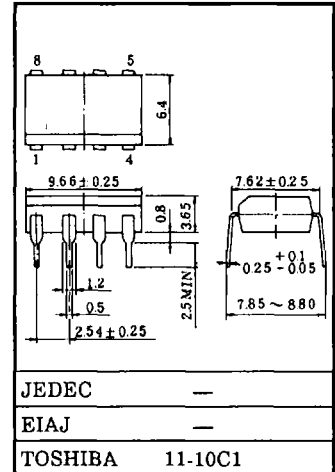

Weight : 0.54g

PIN CONFIGURATION (TOP VIEW)



- 1 : NC
- 2 : ANODE
- 3 : CATHODE
- 4 : NC
- 5 : GND
- 6 : V_{O2} (OUTPUT)
- 7 : V_{O1} (Rex TERMINAL)
- 8 : VCC

TRUTH TABLE

		Tr1	Tr2
Input LED	ON	ON	OFF
	OFF	OFF	ON

(TLP557)

ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC		SYMBOL	RATING	UNIT
LD	Forward Current	I_F	25	mA
	Peak Transient Forward Current (Note 1)	I_{FPT}	1	A
	Reverse Voltage	V_R	5	V
	Junction Temperature	(T_j)	125	°C
EETR DTCC	Output Current ($f \leq 5\text{kHz}$, Duty $\leq 50\%$)	I_O	+0.32 / -0.32	A
	Peak Output Current ($P_W \leq 10\mu\text{s}$, $f \leq 5\text{kHz}$)	I_{OP}	+2 / -0.5	A
	Output Voltage	V_O	16	V
	Supply Voltage	V_{CC}	16	V
	O_1 Terminal to O_2 Terminal (Pin 7 - Pin 6) Voltage	V_{1-2}	1.5	V
	O_2 Terminal to O_1 Terminal (Pin 6 - Pin 7) Voltage	V_{2-1}	5	V
	Power Dissipation (Note 2)	P_o	0.5	W
Junction Temperature	(T_j)	125	°C	
Total Package Power Dissipation (Note 3)	P_{OT}	0.55	W	
Operating Temperature Range	T_{opr}	-30~70	°C	
Storage Temperature Range	T_{stg}	-55~125	°C	
Lead Solder Temperature (10 sec.)	T_{sold}	260	°C	
Isolation Voltage (AC, 1min., R.H. $\leq 60\%$, $T_a = 25^\circ\text{C}$) (Note 4)	BV_S	2500	Vrms	

Note 1 : Pulse width $PW \leq 1\mu\text{s}$, 300pps

Note 2 : $\Delta P_o / ^\circ\text{C} = -6.7\text{mW}/^\circ\text{C}$ ($T_a \geq 50^\circ\text{C}$)

Note 3 : $\Delta P_{OT} / ^\circ\text{C} = -7.4\text{mW}/^\circ\text{C}$ ($T_a \geq 50^\circ\text{C}$)

Note 4 : Device considered a two terminal device : pins 1, 2, 3 and 4 shorted together,
and pins 5, 6, 7 and 8 shorted together.

TLP557

(TLP557)

ELECTRICAL CHARACTERISTICS (Ta = -30~70°C, Unless otherwise specified)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP.*	MAX.	UNIT	TEST CIRCUIT	
Input Forward Voltage	V _F	I _F = 5mA, Ta = 25°C	—	1.55	1.7	V		
Temperature Coefficient of Forward Voltage	ΔV _F /ΔTa	I _F = 5mA	—	-2.0	—	mV/°C		
Input Reverse Current	I _R	V _R = 5V, Ta = 25°C	—	—	10	μA		
Input Capacitance	C _T	V = 0, f = 1MHz, Ta = 25°C	—	—	250	pF		
O ₁ Output Leakage Current	I _{O1L}	V _{CC} = 16V, V _{O1} = 0, V _F = 0.8V	—	0.01	200	μA	1	
O ₂ Output Leakage Current	I _{O2L}	V _{CC} = 16V, V _{O2} = 16V, I _F = 5mA	—	0.2	200	μA	2	
O ₁ Output Current	I _O	V _S = 6 = 2.3V R _{ex} = 2.7Ω I _F = 5mA, Ta = 25°C	V _{CC} = 6V	0.22	0.27	0.32	A	3
			V _{CC} = 16V	0.22	0.27	0.32		
O ₂ High Level Output Voltage	V _{OH}	V _{CC} = 6V, R _{ex} = 2.7Ω I _F = 5mA	3.5	5.5	—	V	4	
O ₂ Low Level Output Voltage	V _{OL}	V _F = 0.8V, R _{ex} = 2.7Ω I _O = 0.25A, Ta = 25°C	V _{CC} = 6V	—	0.2	0.4	V	5
			V _{CC} = 16V	—	0.2	0.4		
		V _F = 0.8V, R _{ex} = 2.7Ω I _O = 0.5A (*1) Ta = 25°C	V _{CC} = 6V	—	0.4	—	V	
			V _{CC} = 16V	—	0.4	—		
High Level Supply Current	I _{CC} H	V _{CC} = 6V, I _F = 5mA R _{ex} = 2.7Ω, Ta = 25°C	—	3.8	10	mA		
		V _{CC} = 6V, I _F = 5mA, R _{ex} = 2.7Ω	—	—	13			
		V _{CC} = 16V, I _F = 5mA, R _{ex} = 2.7Ω	—	5.2	17			
Low Level Supply Current	I _{CC} L	V _{CC} = 6V, I _F = 0mA R _{ex} = 2.7Ω, Ta = 25°C	—	11	17	mA		
		V _{CC} = 6V, I _F = 0mA, R _{ex} = 2.7Ω	—	—	22			
		V _{CC} = 16V, I _F = 0mA, R _{ex} = 2.7Ω	—	13	25			
"Output L→H" Threshold Input Current	I _{FL} H	R _{ex} = 2.7Ω I _O = 0.25A V _{O2} > 3V	V _{CC} = 6V	—	2.5	5	mA	
			V _{CC} = 16V	—	—	5		
"Output H→L" Threshold Input Current	V _F HL	R _{ex} = 2.7Ω I _O = 0.25A V _{O2} ≤ 0.4V	V _{CC} = 6V	0.8	—	—	V	
			V _{CC} = 16V	0.8	—	—		
Input Current Hysteresis	I _{HYS}	V _{CC} = 6V, R _{ex} = 2.7Ω, Ta = 25°C	—	0.05	—	mA		
Supply Voltage	V _{CC}		5	—	16	V		
Capacitance (Input-Output)	C _S	V _S = 0, f = 1MHz, Ta = 25°C	—	1.0	2.0	pF		
Resistance (Input-Output)	R _S	V _S = 500V, Ta = 25°C, R.H. ≤ 60%	5 × 10 ¹⁰	10 ¹⁴	—	Ω		


* All typical values are at Ta = 25°C (*1): Duration of I_O time ≤ 100μs

(TLP557)

RECOMMENDED OPERATING CONDITION

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Input Current ON	$I_F(ON)$	7	8	20	mA
Input Voltage OFF	$V_F(OFF)$	0	—	0.8	V
Supply Voltage	V_{CC}	5	6	13	V
I_{B1} Drive Current	I_{O1}	—	0.15	0.25	A
I_{B2} Drive Current	I_{O2}	—	—	0.5	A
External Resistance	R_{ex}	2.7	4.3	—	Ω
$V_{CC} - V_{O2}$ (Pin 8 - Pin 6) ON Voltage	V_{8-6}	2.3	3 ($I_{O1} = 0.15A$)	2.5 ($I_{O1} = 0.25A$)	V
Operating Temperature	T_{opr}	-30	25	70	$^{\circ}C$

(R_{ex} is for constant current driving)

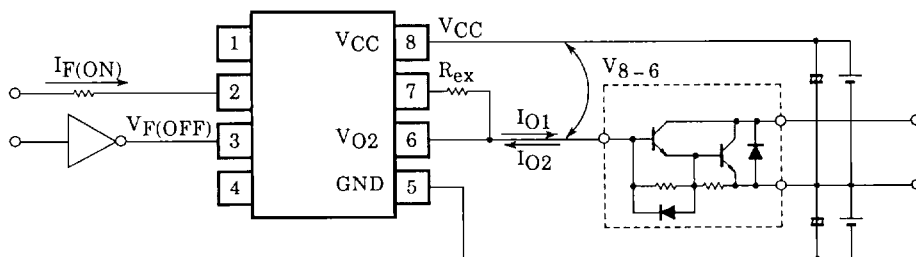

TLP557


(TLP557)

SWITCHING CHARACTERISTICS (Ta = -30~70°C Unless otherwise specified)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.*	MAX.	UNIT	TEST CIRCUIT
Propagation Delay Time, L→H	tpLH	VCC=6V, IF=8mA Rex=2.7Ω f=5kHz, Duty=10%	—	1	5	μs	6
Propagation Delay Time, H→L	tpHL		—	1	5	μs	
Output Rise Time	tr		—	0.05	—	μs	
Output Fall Time	tf		—	0.05	—	μs	
Common Mode Transient Immunity at High Level Output	CMH	VCM=600V, IF=8mA VCC=6V, Rex=270Ω R=1kΩ, Ta=25°C	-2000	—	—	V/μs	7
Common Mode Transient Immunity at Low Level Output	CML	VCM=600V, IF=0mA VCC=6V, Rex=270Ω R=1kΩ, Ta=25°C	2000	—	—	V/μs	7

* All typical values are at Ta=25°C.


TEST CIRCUIT 1 : IO1L




TEST CIRCUIT 2 : IO2L




TEST CIRCUIT 3 : IO

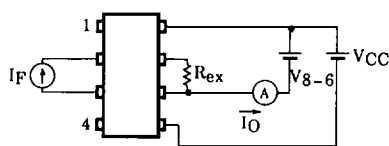


TEST CIRCUIT 4 : VOH

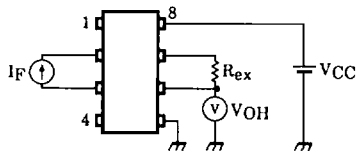


TEST CIRCUIT 5 : VOL

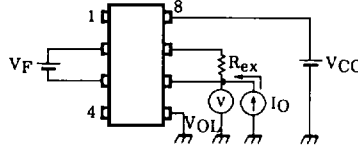

TEST CIRCUIT 6 : tpLH, tpHL, tr, tf

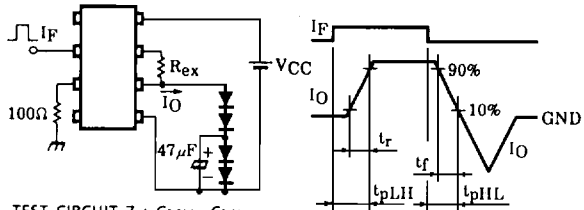

TEST CIRCUIT 7 : CMH, CML

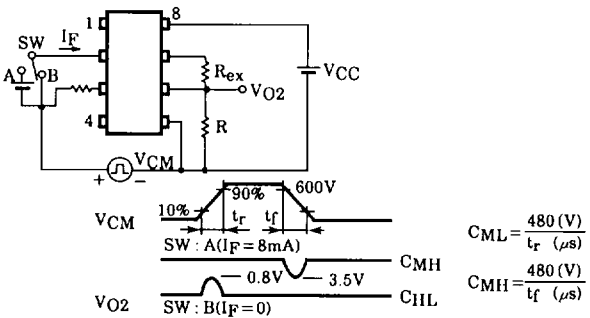

CML (CMH) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

$$CML = \frac{480(V)}{tr(\mu s)}$$

$$CMH = \frac{480(V)}{tf(\mu s)}$$

(TLP557)

