



# SAW Components

Data Sheet K 3450 K





**SAW Components**

**K 3450 K**

**IF Filter for Video Applications**

**33,40 MHz and 38,90 MHz**

**Data Sheet**

**Standard**

- B/G
- L/L'


**Features**

- TV IF filter with two separate picture channels
- Channel 1 with Nyquist slopes at 33,40 MHz and 38,90 MHz (L/L' mode)
- Constant group delay
- Channel 2 with Nyquist slope at 38,90 MHz and sound suppression (B/G mode)
- Constant group delay
- Suitable for CENELEC EN 55020

**Terminals**

- Tinned CuFe alloy


Plastic package **DIP10K**

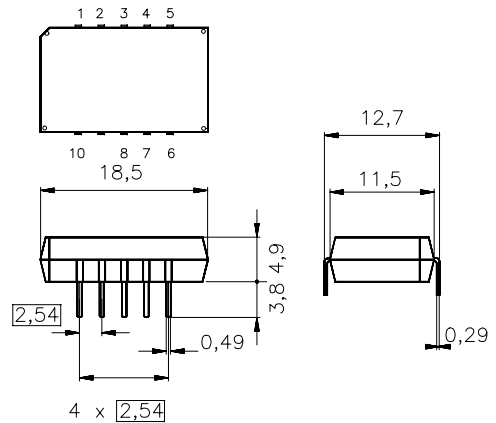

Dimensions in mm, approx. weight 1,8 g

**Pin configuration**

- 1 Input - channel 1
- 2 Input - ground
- 3; 8 Chip carrier - ground
- 4; 5 Output - channel 1
- 6; 7 Output - channel 2
- 9 Free
- 10 Input - channel 2



Type	Ordering code	Marking and package according to	Packing according to
K 3450 K	B39389-K3450-K100	C61157-A2-A3	F61074-V8068-Z000

**Maximum ratings**

Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	12	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals



Data Sheet

Characteristics of channel 1

Reference temperature:  $T_A = 25\text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 2\ \text{k}\Omega \parallel 3\ \text{pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	37,40 MHz	14,3	15,8	17,3	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	38,90 MHz	5,0	6,0	7,0	dB
Picture carrier	33,40 MHz	4,4	5,4	6,4	dB
Adjacent picture carrier	30,90 MHz	48,0	62,0	—	dB
	31,90 MHz	48,0	60,0	—	dB
Adjacent sound carrier	40,40 MHz	46,0	55,0	—	dB
	41,40 MHz	42,0	49,0	—	dB
Lower sidelobe	25,00 ... 31,90 MHz	40,0	46,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	40,0	46,0	—	dB
<b>Reflected wave signal suppression</b>					
1,1 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		42,0	58,0	—	dB
<b>Feedthrough signal suppression</b>					
1,1 $\mu\text{s}$ ... 1,0 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		—	56,0	—	dB
Group delay predistortion	$\Delta\tau$	—	40	—	
<b>Impedance at 37,40 MHz</b>					
Input:	$Z_{IN} = R_{IN} \parallel C_{IN}$	—	1,8 $\parallel$ 15,4	—	k $\Omega$ $\parallel$ pF
Output:	$Z_{OUT} = R_{OUT} \parallel C_{OUT}$	—	1,6 $\parallel$ 4,3	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



**SAW Components**

**K 3450 K**

**IF Filter for Video Applications**

**33,40 MHz and 38,90 MHz**

**Data Sheet**

**Characteristics of channel 2**



Reference temperature:  $T_A = 25\text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 2\ \text{k}\Omega \parallel 3\ \text{pF}$

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	37,40 MHz	13,4	14,9	16,4	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	38,90 MHz	5,3	6,3	7,3	dB
Color carrier	34,47 MHz	-0,2	0,8	1,8	dB
Sound carrier	33,40 MHz	30,0	48,0	—	dB
Adjacent picture carrier	30,90 MHz	45,0	52,0	—	dB
	31,90 MHz	47,0	57,0	—	dB
	32,40 MHz	46,0	55,0	—	dB
Adjacent sound carrier	40,40 MHz	45,0	56,0	—	dB
	40,15 MHz	40,0	48,0	—	dB
	41,40 MHz	42,0	49,0	—	dB
Lower sidelobe	25,00 ... 31,90 MHz	41,0	47,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	37,0	43,0	—	dB
<b>Reflected wave signal suppression</b>					
1,1 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		42,0	56,0	—	dB
<b>Feedthrough signal suppression</b>					
1,1 $\mu\text{s}$ ... 1,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		—	56,0	—	dB
<b>Group delay ripple (p-p)</b>					
	$\Delta\tau$	—	40	—	
<b>Impedance at 37,40 MHz</b>					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,9 $\parallel$ 13,3	—	k $\Omega$ $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	2,0 $\parallel$ 3,2	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>					
	$TC_f$	—	-72	—	ppm/K



Data Sheet


Frequency response of channel 1

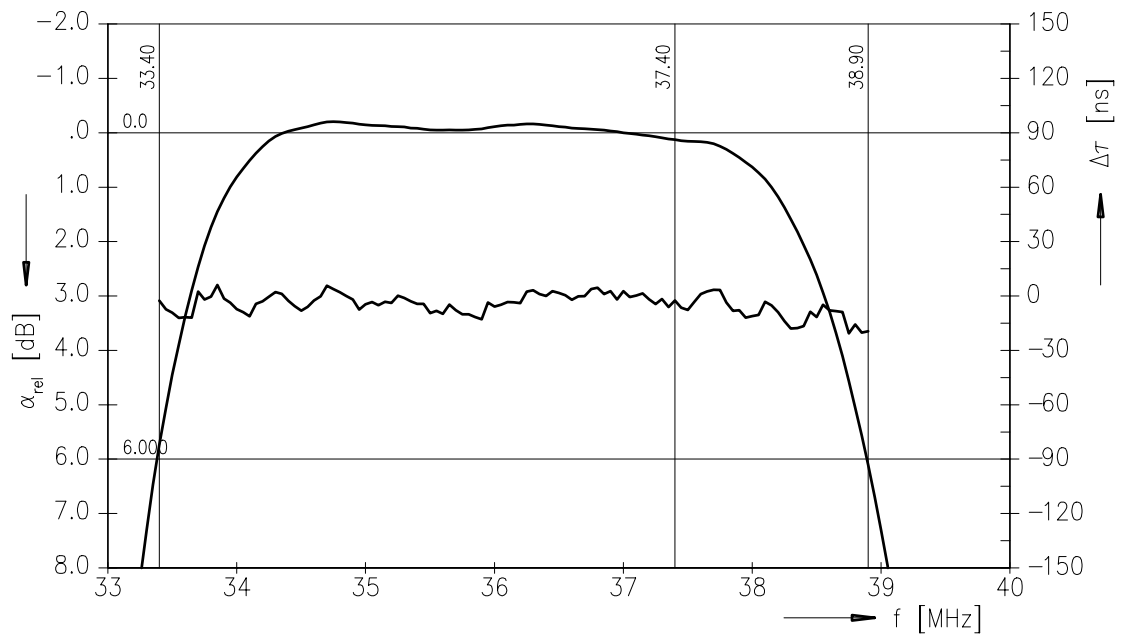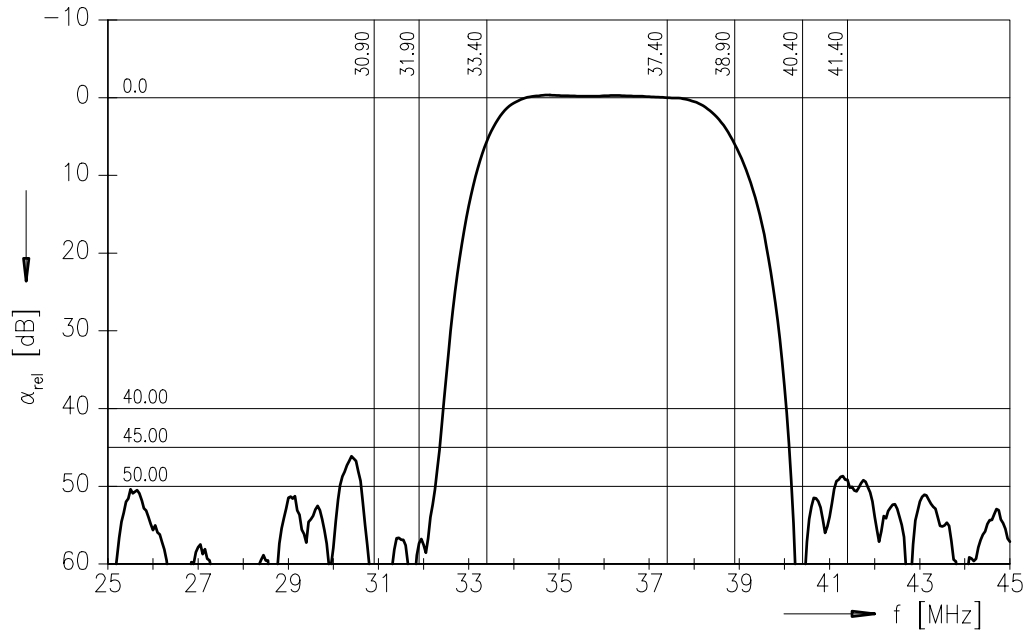




Data Sheet

Frequency response of channel 1

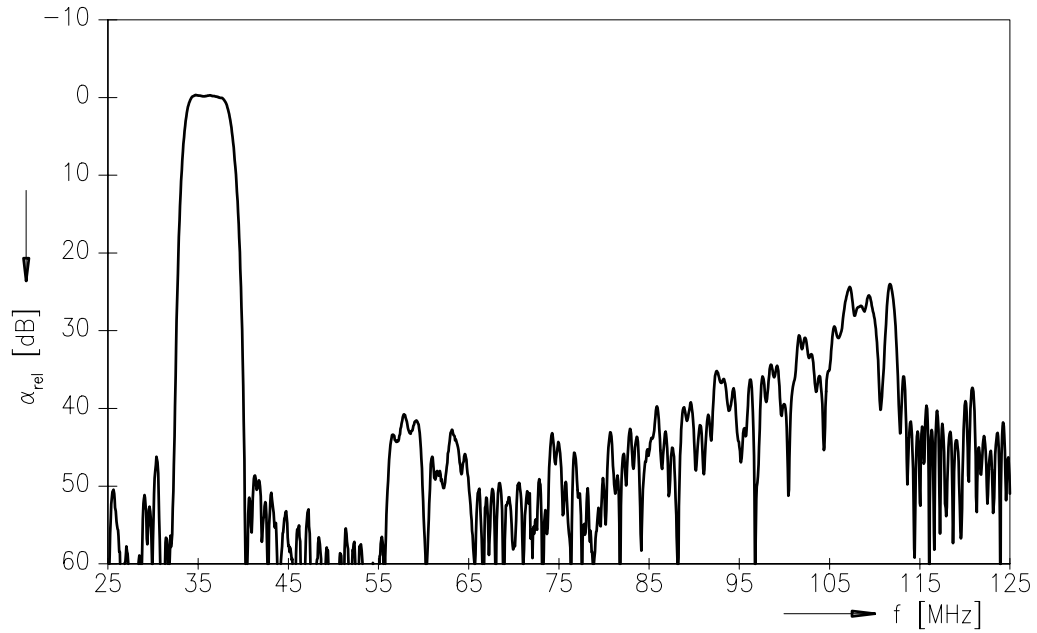



Time domain response of channel 1

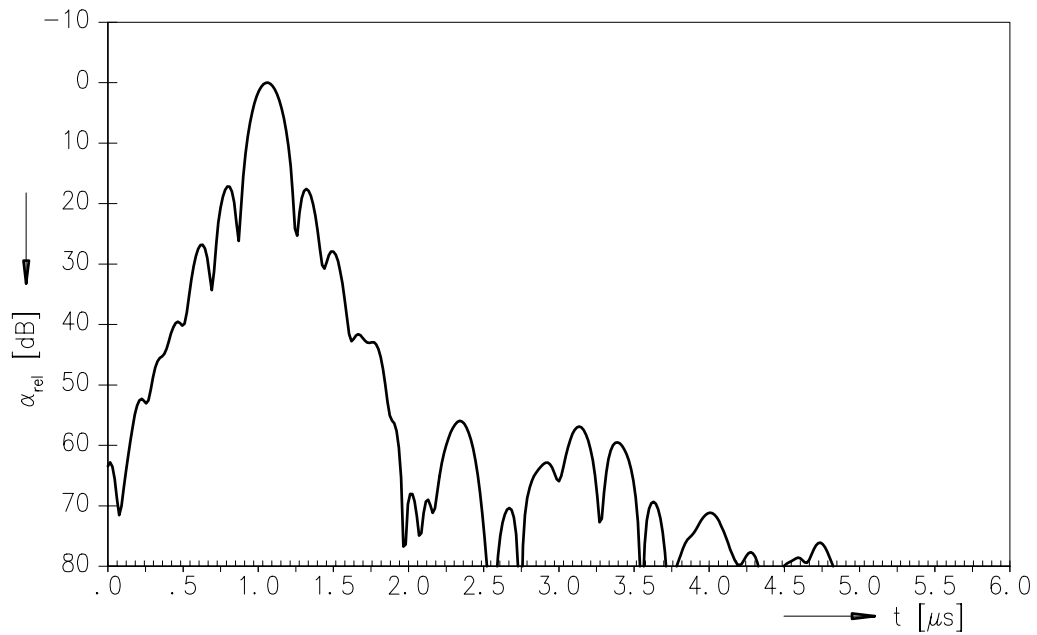



Data Sheet

Frequency response of channel 2

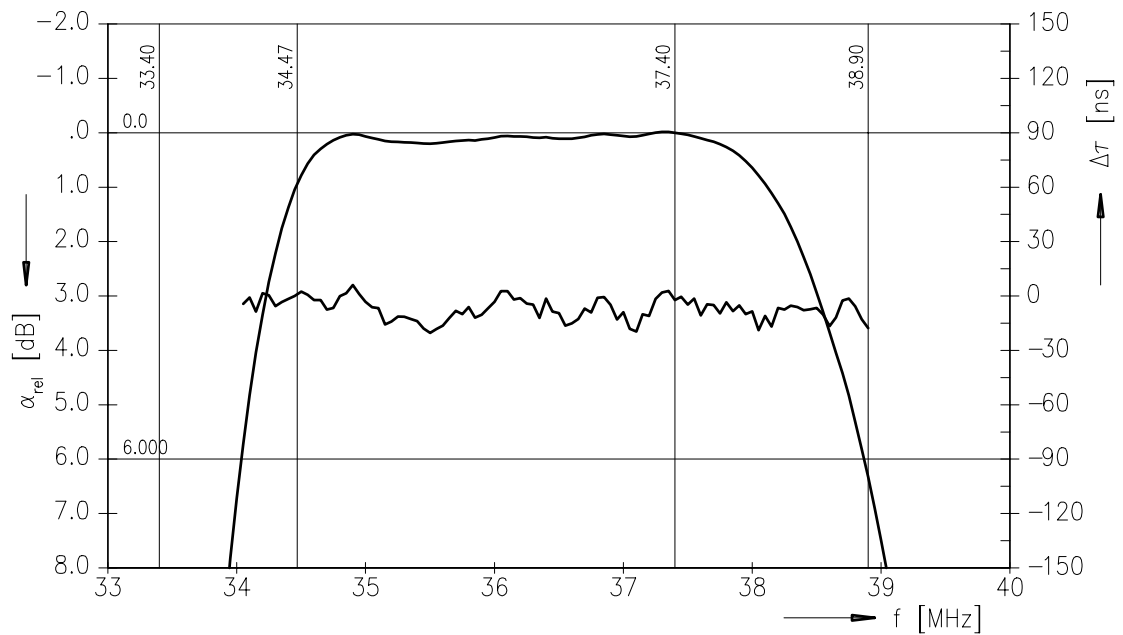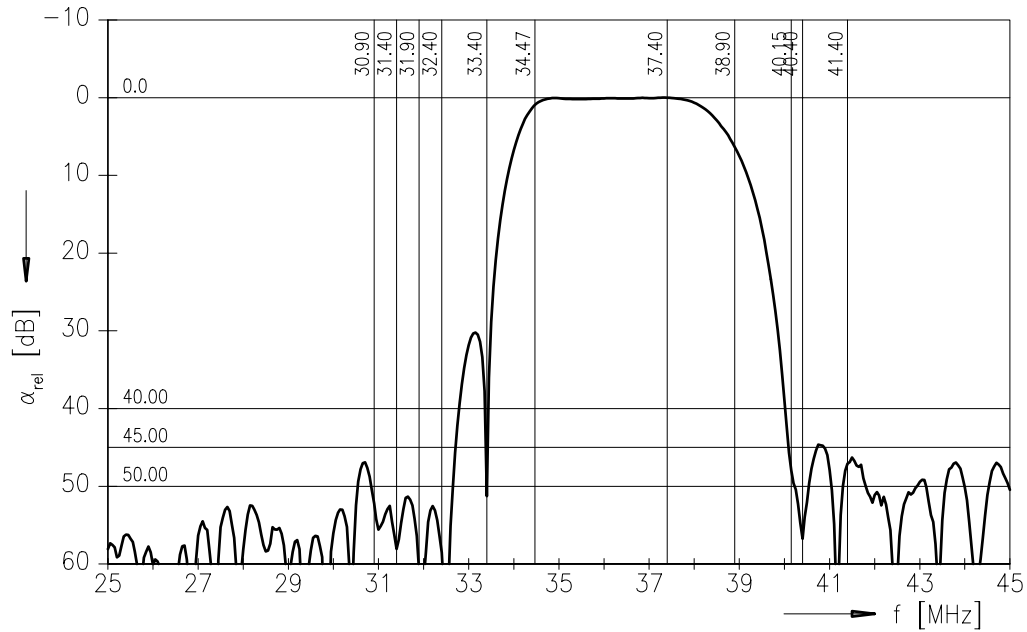



**SAW Components**

**K 3450 K**

**IF Filter for Video Applications**

**33,40 MHz and 38,90 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, OFW E UE**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.