
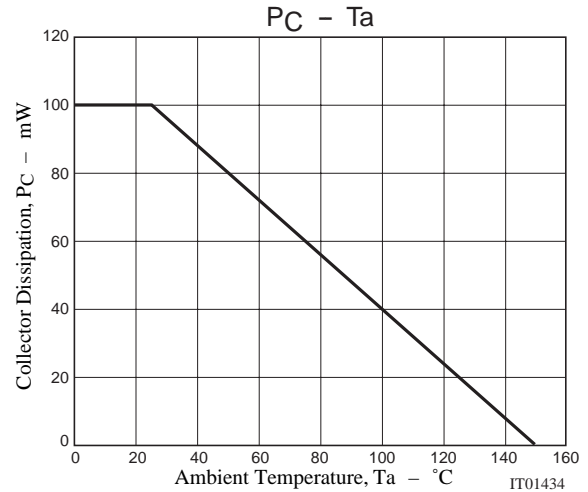
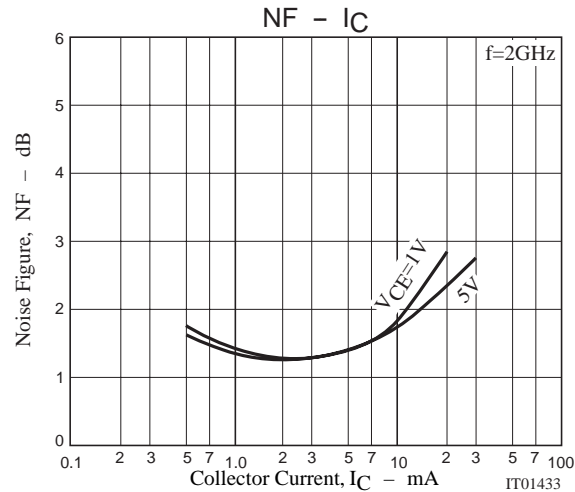
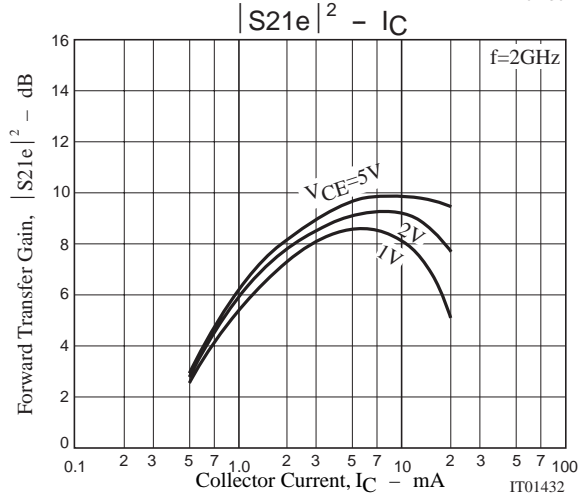
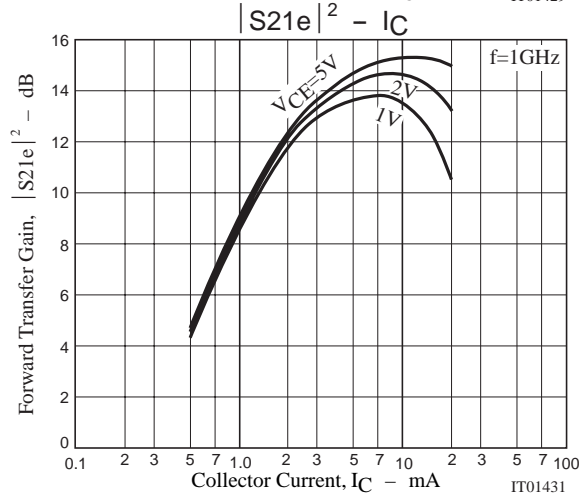
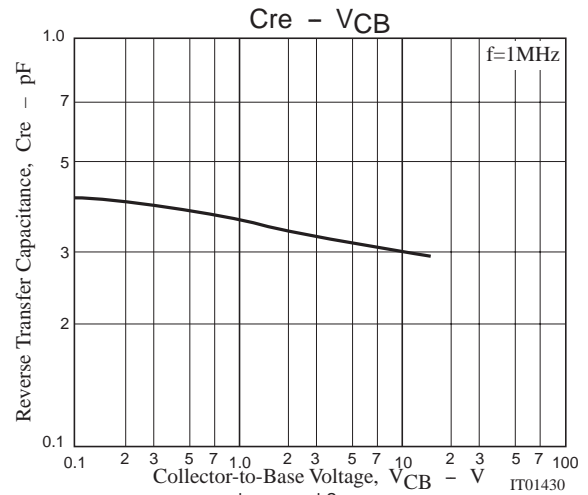
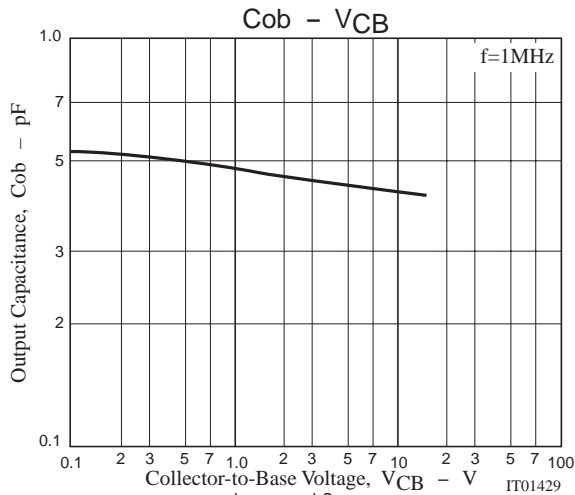
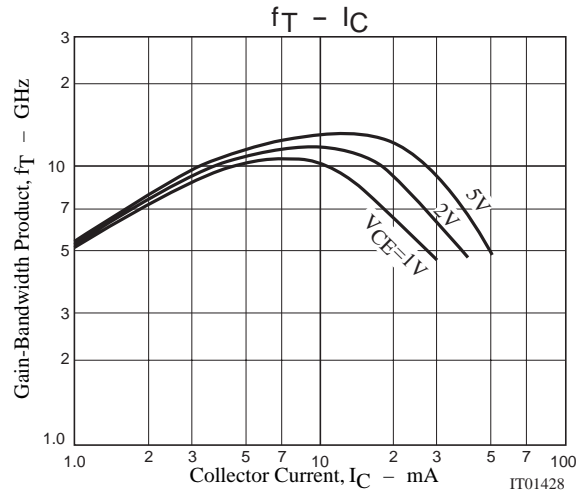


2SC5541

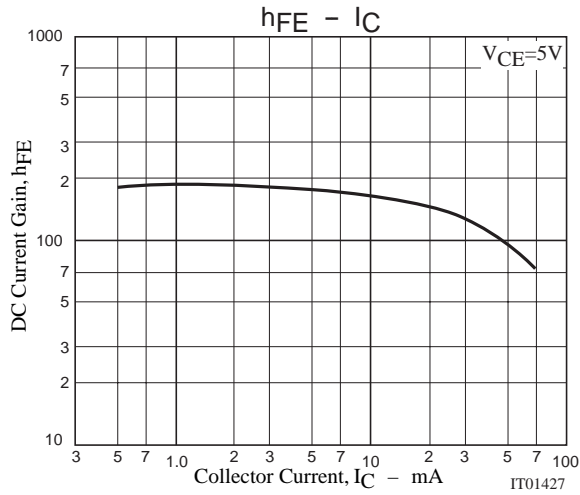

2SC5541

S Parameters (Common emitter)

$V_{CE}=5V, I_C=1mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.972	-7.4	3.143	173.0	0.025	85.2	0.994	-4.9
200	0.963	-13.9	3.438	164.9	0.049	79.1	0.981	-9.6
400	0.928	-28.6	3.072	153.3	0.093	70.0	0.945	-18.7
600	0.885	-40.7	2.860	142.2	0.129	61.6	0.886	-27.2
800	0.833	-52.5	2.719	131.0	0.157	54.8	0.833	-33.8
1000	0.784	-62.8	2.701	119.8	0.182	49.1	0.801	-38.4
1200	0.731	-72.3	2.470	111.1	0.198	44.0	0.758	-43.5
1400	0.682	-80.9	2.272	103.8	0.208	40.3	0.716	-48.1
1600	0.640	-88.5	2.113	97.1	0.216	37.5	0.680	-51.8
1800	0.594	-96.0	1.848	92.1	0.215	35.8	0.624	-56.1
2000	0.563	-101.8	1.742	86.4	0.218	34.4	0.598	-58.7

$V_{CE}=5V, I_C=3mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.924	-12.8	8.738	168.4	0.024	82.4	0.979	-8.9
200	0.883	-25.4	8.068	158.5	0.046	73.9	0.939	-17.3
400	0.795	-47.3	7.223	140.3	0.081	62.9	0.831	-30.8
600	0.694	-65.9	6.175	126.2	0.103	55.3	0.718	-40.5
800	0.609	-80.7	5.293	115.1	0.119	50.6	0.624	-47.1
1000	0.546	-92.1	4.576	106.6	0.131	48.1	0.549	-51.8
1200	0.496	-101.8	4.016	99.1	0.140	46.9	0.500	-55.0
1400	0.456	-110.4	3.562	92.8	0.148	46.6	0.463	-57.7
1600	0.423	-117.8	3.221	87.5	0.157	46.9	0.437	-59.9
1800	0.396	-124.7	2.950	82.2	0.165	47.3	0.422	-61.6
2000	0.371	-130.9	2.701	77.9	0.174	48.1	0.406	-63.1

$V_{CE}=5V, I_C=5mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.878	-17.5	12.575	165.2	0.023	80.7	0.964	-11.8
200	0.816	-33.9	11.443	152.8	0.044	71.1	0.896	-22.3
400	0.692	-60.7	9.521	132.1	0.072	59.7	0.740	-37.5
600	0.582	-80.9	7.660	117.9	0.089	53.9	0.609	-46.5
800	0.501	-96.1	6.284	107.6	0.101	52.2	0.515	-52.0
1000	0.445	-107.9	5.301	99.9	0.113	51.9	0.445	-55.5
1200	0.407	-117.2	4.558	93.4	0.123	52.1	0.402	-57.6
1400	0.378	-125.2	3.988	88.0	0.134	52.7	0.372	-59.5
1600	0.355	-132.3	3.572	83.4	0.145	53.7	0.353	-60.9
1800	0.337	-138.4	3.234	78.9	0.155	54.5	0.341	-62.1
2000	0.319	-144.5	2.949	75.2	0.166	55.0	0.332	-63.0

2SC5541

$V_{CE}=5V, I_C=10mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.791	-25.7	18.873	159.7	0.022	76.6	0.933	-16.5
200	0.700	-47.9	16.389	143.5	0.039	66.5	0.817	-29.5
400	0.548	-80.3	11.932	121.7	0.060	58.0	0.604	-45.1
600	0.455	-101.3	8.981	108.4	0.073	56.3	0.474	-51.5
800	0.399	-116.5	7.081	99.6	0.086	57.1	0.395	-54.9
1000	0.362	-127.9	5.836	93.3	0.098	58.5	0.344	-56.5
1200	0.339	-136.5	4.954	87.8	0.110	59.7	0.314	-57.5
1400	0.321	-143.7	4.295	83.3	0.123	61.0	0.293	-58.6
1600	0.308	-150.0	3.821	79.3	0.136	61.6	0.281	-59.3
1800	0.296	-155.3	3.450	75.4	0.150	61.7	0.273	-60.0
2000	0.286	-160.7	3.136	71.9	0.163	62.1	0.269	-60.6

$V_{CE}=1V, I_C=1mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.968	-8.3	3.360	172.1	0.029	84.1	0.992	-5.7
200	0.958	-15.5	3.297	164.7	0.057	77.6	0.974	-11.2
400	0.916	-32.1	3.354	150.2	0.107	68.2	0.939	-20.7
600	0.868	-45.1	2.806	138.1	0.147	58.7	0.867	-31.2
800	0.810	-57.8	2.590	126.8	0.177	51.5	0.800	-38.8
1000	0.758	-68.9	2.508	116.7	0.200	45.6	0.755	-43.8
1200	0.704	-79.0	2.307	107.8	0.215	40.8	0.708	-48.9
1400	0.656	-88.0	2.132	100.1	0.226	37.1	0.667	-53.5
1600	0.616	-95.8	1.994	93.3	0.235	34.1	0.634	-57.2
1800	0.571	-103.7	1.831	86.9	0.241	31.4	0.596	-61.3
2000	0.542	-109.8	1.714	81.3	0.242	29.8	0.572	-64.1

$V_{CE}=1V, I_C=3mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.910	-15.2	8.785	167.2	0.028	80.4	0.972	-10.6
200	0.869	-29.1	8.118	155.9	0.053	71.7	0.919	-20.4
400	0.774	-53.8	7.103	136.8	0.091	60.0	0.799	-35.1
600	0.663	-75.3	5.903	122.4	0.114	51.9	0.672	-46.0
800	0.581	-91.1	4.976	111.1	0.130	47.6	0.577	-53.2
1000	0.530	-101.8	4.281	102.4	0.142	45.0	0.509	-58.2
1200	0.487	-111.7	3.727	95.0	0.151	44.4	0.460	-62.0
1400	0.453	-120.3	3.285	89.0	0.159	44.1	0.423	-65.2
1600	0.428	-127.7	2.963	83.7	0.168	44.3	0.396	-67.6
1800	0.403	-135.6	2.692	78.7	0.177	44.9	0.376	-69.6
2000	0.384	-142.0	2.471	74.4	0.185	45.6	0.361	-71.2

2SC5541

$V_{CE}=1V, I_C=5mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.857	-21.1	12.331	163.7	0.027	78.3	0.954	-13.8
200	0.792	-39.6	11.318	149.6	0.050	68.1	0.872	-25.8
400	0.658	-70.8	9.000	128.2	0.079	56.1	0.691	-43.2
600	0.561	-91.5	7.120	113.8	0.097	51.3	0.555	-52.7
800	0.493	-107.4	5.760	103.6	0.109	49.5	0.463	-58.7
1000	0.448	-119.9	4.816	96.1	0.120	49.4	0.401	-62.5
1200	0.418	-129.5	4.125	89.9	0.131	50.0	0.361	-65.2
1400	0.395	-137.6	3.602	84.5	0.141	51.0	0.332	-67.5
1600	0.378	-144.6	3.221	79.9	0.153	51.9	0.313	-69.2
1800	0.364	-150.5	2.915	75.6	0.165	52.5	0.300	-70.5
2000	0.351	-156.3	2.663	71.6	0.176	53.2	0.291	-71.9

$V_{CE}=1V, I_C=10mA, Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.752	-33.0	18.187	156.6	0.026	74.2	0.901	-19.8
200	0.659	-59.8	15.275	138.5	0.044	62.9	0.760	-34.4
400	0.526	-97.2	10.561	116.3	0.064	53.9	0.535	-50.4
600	0.461	-118.5	7.741	103.8	0.077	53.6	0.410	-56.8
800	0.425	-133.0	6.044	95.4	0.090	55.1	0.341	-60.0
1000	0.404	-143.4	4.963	89.1	0.102	56.8	0.298	-61.8
1200	0.389	-151.3	4.204	83.7	0.115	58.5	0.274	-63.2
1400	0.377	-157.9	3.645	79.2	0.128	59.6	0.257	-64.6
1600	0.369	-163.4	3.245	75.2	0.143	60.7	0.248	-65.7
1800	0.360	-168.5	2.927	71.2	0.157	61.1	0.243	-66.6
2000	0.354	-173.2	2.663	67.7	0.171	61.5	0.242	-67.7

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of January, 2000. Specifications and information herein are subject to change without notice.