1.5 V drive

TOSHIBA Field Effect Transistor Silicon N-Channel MOS Type

SSM3K310T

High-Speed Switching Applications

Low ON-resistance:

 $R_{on} = 66 \text{ m}\Omega \text{ (max) } (@V_{GS} = 1.5 \text{ V})$

 $R_{on} = 43 \text{ m}\Omega \text{ (max) (@V_{GS} = 1.8 V)}$ $R_{on} = 32 \text{ m}\Omega \text{ (max) } (@V_{GS} = 2.5 \text{ V})$

 $R_{on} = 28 \text{ m}\Omega \text{ (max) (@V_{GS} = 4.0 V)}$

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit	
Drain-Source voltage		V _{DS}	20	V	
Gate-Source voltage		V _{GSS}	± 10	٧	
Drain current	DC	I _D	5.0	A	
	Pulse	I _{DP}	10.0		
Drain power dissipation		P _{D (Note 1)}	700	mW	
Channel temperature		T _{ch}	150	°C	
Storage temperature range		T _{stg}	-55~150	°C	

Note 1: Mounted on an FR4 board. $(25.4 \text{ mm} \times 25.4 \text{ mm} \times 1.6 \text{ t}, \text{ Cu Pad: } 645 \text{ mm}^2)$

Unit: mm 1.GATE 2.SOURCE **TSM** 3.DRAIN **JEDEC** JEITA TOSHIBA 2-3S1A

Weight: 10 mg (typ.)

Electrical Characteristics (Ta = 25°C)


Characte	eristics	Symbol	Test Condition		Min	Тур.	Max	Unit
Drain-Source breakdown voltage	V (BR) DSS	$I_D = 1 \text{ mA}, V_{GS} = 0$		20	_	_	V	
	V (BR) DSX	$I_D = 1 \text{ mA}, V_{GS} = -10 \text{ V}$		12	_	_]	
Drain cutoff current	t	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0		_	_	1	μΑ
Gate leakage curre	ent	I _{GSS}	$V_{GS} = \pm 10 \text{ V}, V_{DS} = 0$		_	_	±1	μА
Gate threshold volt	tage	V _{th}	$V_{DS} = 3 \text{ V}, I_{D} = 1 \text{ mA}$		0.35	_	1.0	V
Forward transfer a	dmittance	Y _{fs}	$V_{DS} = 3 \text{ V}, I_{D} = 4.0 \text{ A}$	(Note 2)	14	28	_	S
Drain-Source ON-resistance	R _{DS} (ON)	$I_D = 4.0 \text{ A}, V_{GS} = 4.0 \text{ V}$	(Note 2)	_	19	28	- mΩ	
		I _D = 3.0 A, V _{GS} = 2.5 V	(Note 2)	_	23	32		
		I _D = 1.0 A, V _{GS} = 1.8 V	(Note 2)	_	28	43		
		I _D = 0.5 A, V _{GS} = 1.5 V	(Note 2)	_	33	66		
Input capacitance		C _{iss}			_	1120	_	
Output capacitance		Coss	$V_{DS} = 10 \text{ V}, V_{GS} = 0, f = 1 \text{ MHz}$		_	180	_	pF
Reverse transfer capacitance		C _{rss}			_	160	_	
Total Gate Charge		Q_g	V -40 V I - 5 0 A		_	14.8	_	
Gate-Source Charge Gate-Drain Charge		Q_{gs}	$V_{DS} = 10 \text{ V}, I_{DS} = 5.0 \text{ A}$ $V_{GS} = 4 \text{ V}$	_	11.4	_	nC	
		Q_{gd}	vGS - 4 v		_	3.4		_
Switching time	Turn-on time	t _{on}	$V_{DD} = 10 \text{ V}, I_D = 2.0 \text{ A},$		_	21	_	
	Turn-off time	t _{off}	$V_{GS} = 0$ ~2.5 V , $R_G = 4.7 \Omega$		_	36	_	ns
Drain-Source forward voltage		V _{DSF}	$I_D = -5.0 \text{ A}, V_{GS} = 0 \text{ V}$	(Note 2)	_	-0.85	-1.2	V

Note 2: Pulse test

Switching Time Test Circuit

(a) Test Circuit


(b) V_{IN}

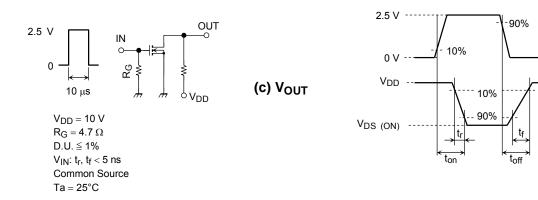


ww.DataSheet4U.com

Marking

Equivalent Circuit (top view)






Notice on Usage


 V_{th} can be expressed as the voltage between gate and source when the low operating current value is I_D = 1 mA for this product. For normal switching operation, $V_{GS\ (on)}$ requires a higher voltage than V_{th} , and $V_{GS\ (off)}$ requires a lower voltage than V_{th} . (The relationship can be established as follows: $V_{GS\ (off)} < V_{th} < V_{GS\ (on)}$.)

Take this into consideration when using the device.


Handling Precaution


When handling individual devices that are not yet mounted on a circuit board, make sure that the environment is protected against electrostatic discharge. Operators should wear antistatic clothing, and containers and other objects that come into direct contact with devices should be made of antistatic materials.








ww.bataSneet40.com












C-V_{DS} 5000 300 (pF) 1000 O 300 Capacitance 100 Common Source 30 Ta = 25 °C f = 1 MHz $V_{GS} = 0 V$ 10**L** 10 100 Drain – Source voltage V_{DS} (V)



Dynamic Input Characteristic


10
Common Source
ID = 5.0 A
Ta = 25°C


VDD = 10V
VDD = 16V

VDD = 16V

Total Gate Charge Qg (nC)

4

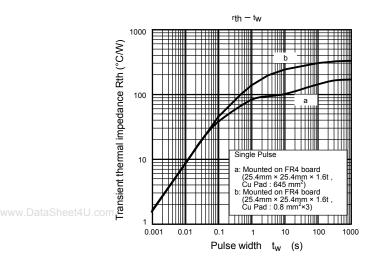



5 2007-01-10

nunu Data Chaat III aau

RESTRICTIONS ON PRODUCT USE

060116EAA

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor
 devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical
 stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety
 in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such
 TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 - In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023 A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility
 is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from
 its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
 021023_C