



# GROAA thru GROMA

Fast Recovery Surface Mount Rectifiers  
Reverse Voltage 50 to 1000 Volts Forward Current 1.5 Amperes

## Features



- ◆ Fast switching for high efficiency
- ◆ For surface mounted applications
- ◆ Glass passivated chip
- ◆ Low reverse leakage current
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ Plastic material has UL flammability classification 94V-0



DO-214AC (SMA)

## Mechanical Data

- ◆ Case : Molded plastic
- ◆ Polarity : Indicated by cathode band
- ◆ Weight : 0.002 ounce, 0.064 gram

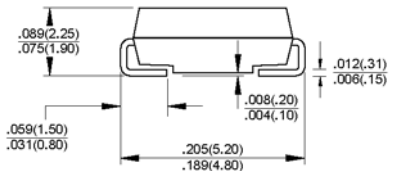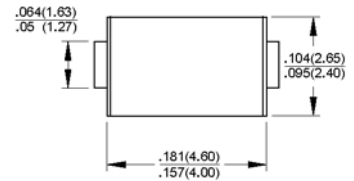

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Parameter	Symbols	GROAA	GROBA	GRODA	GROGA	GROJA	GROKA	GROMA	Units	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current @ $T_J=90^\circ\text{C}$	$I_{AV}$	1.5								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0								Amps
Maximum forward voltage at 1.5A DC	$V_F$	1.3								Volts
Maximum DC reverse current at rated DC blocking voltage @ $T_J=25^\circ\text{C}$ @ $T_J=125^\circ\text{C}$	$I_R$	5.0 200								$\mu\text{A}$
Maximum reverse recovery time (Note 1)	$t_{tr}$	150				250		500		nS
Typical junction capacitance (Note 2)	$C_J$	30								pF
Typical thermal resistance (Note 3)	$R_{\theta JL}$	20								$^\circ\text{C/W}$
Operating temperature range	$T_J$	-55 to +150								$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150								$^\circ\text{C}$

- Notes:**
1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$
  2. Measured at 1.0MHz and applied reverse voltage of 4.0V D.C.
  3. Thermal Resistance Junction to Lead

## RATINGS AND CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

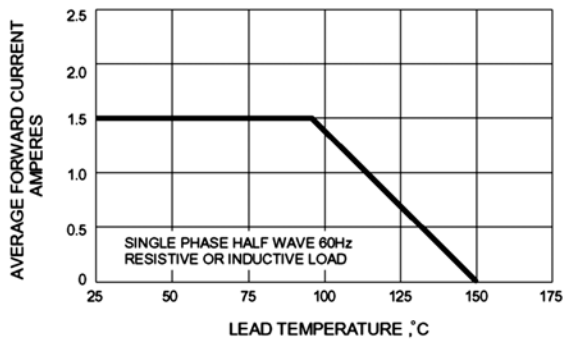


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

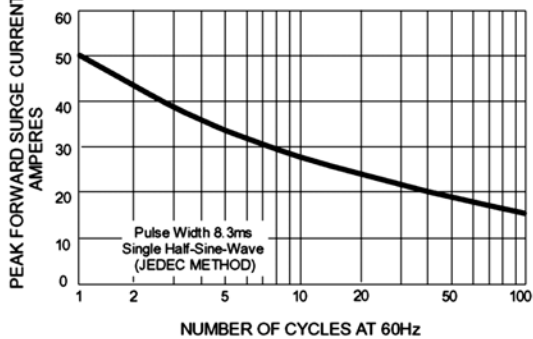


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

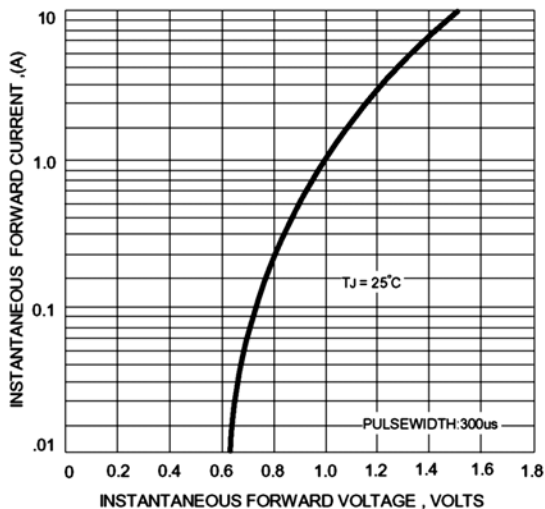


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

