


FEATURES

- Planar Structure
- Dielectric Passivation
- 100% Purge Burn-in

APPLICATIONS

- Optical Data Communications Systems
- E1 / T1 Communication Systems
- Analog Transmission Systems

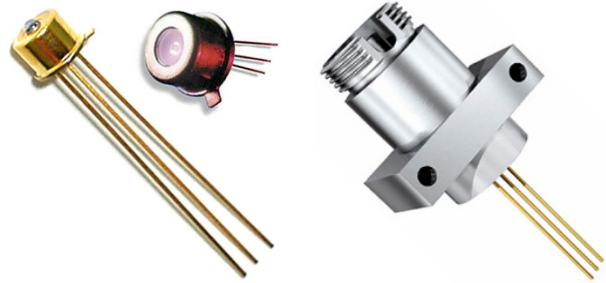

13LED20-1xx
TO can Package

13LED20-5xx
FC Receptacle

PRODUCT DESCRIPTION

The 13LED20 is a 1300nm surface emitting LED. It is intended for use in low cost, short haul multi-mode optical communication systems operating to 100MB/s and for use in optical test and measurement equipment.

The device can be assembled in a TO can or mounted in an SC, ST or FC receptacle. Custom packages are an option.

ELECTRICAL CHARACTERISTICS

Table 1: Electrical Specifications

| PARAMETER | MIN | TYP | MAX | UNIT |
|--------------------------------------|------|------|------|------|
| Total output power | - | 1 | - | mW |
| Minimum coupled power ⁽¹⁾ | 30 | - | - | μW |
| Peak wavelength | 1260 | 1300 | 1340 | nm |
| Spectral width | - | 120 | - | nm |
| Rise / Fall time | - | 6 | - | ns |

(1) Coupled to 62.5/125 fiber @ 100mA forward current

Table 2: Absolute Maximum Ratings

| PARAMETER | MIN | MAX | UNIT |
|------------------------------------|-----|------|------|
| Forward Current | - | 125 | mA |
| Operating Case Temperature | -40 | +85 | °C |
| Storage Temperature | -40 | +85 | °C |
| Soldering temperature (10 seconds) | - | +250 | °C |

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

ORDERING INFORMATION

| Part Number | Options |
|-------------|--|
| 13LED20-1xx | Package: TO46 Number of pins: 2, 3 Cap: Window, lens. AR / Non-AR coated. Cap plating: Gold or nickel |
| 13LED20-5xx | Number of pins: 2, 3 Connector Type: SC, ST or FC. Aligned for APC or UPC |

Please contact Anadigics for the specific part number and pinout that suits your needs

IMPORTANT NOTICE

ANADIGICS, Inc.
 829 Flynn Road
 Camarillo, California 93012, U.S.A.
 Tel: +1 (805) 445-4500
 Fax: +1 (805) 445-4502
 URL: <http://www.anadigics.com>
 E-mail: Mktg@anadigics.com

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.