


Embedded Engine Board HS-1000

- 133MHz FSB
- CRT
- ATA/33/66/100
- Audio
- COM
- Game Port
- USB
- H/W Monitor

Socket 370 133MHz FSB Industrial ATX Motherboard with VGA & Audio

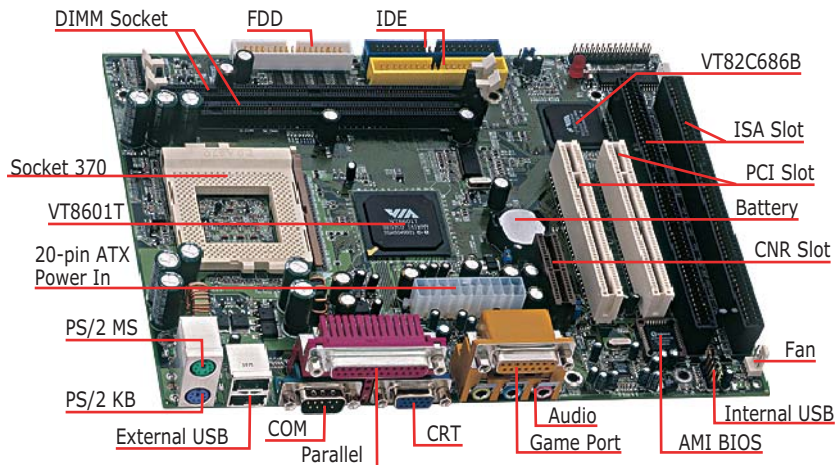

■ Features

- Socket 370 for Intel Celeron/Coppermine/Tualatin 633MHz~1.3GHz CPU
- Supports 100/133MHz FSB
- Two DIMM sockets with a max. capacity of 1GB
- VIA VT8601T/VT82C686B system chipset
- VIA VT82C686B super I/O chipset
- VIA VT8601T display controller
- AC97 3D audio controller
- Fast PCI ATA/33/66/100 IDE controller
- One COM, one game port, four USB ports
- Hardware Monitor function

■ Specifications

- ***CPU:** Socket 370 for Intel Celeron/Coppermine/Tualatin 633MHz~1.3GHz CPU
- ***Front Side Bus:** Supports 100/133MHz FSB
- ***Memory:** Two DIMM sockets supporting up to 1GB
- ***Chipset:** VIA VT8601T/VT82C686B
- ***I/O Chipset:** VIA VT82C686B
- ***Slot:** Two PCI, two ISA, and one CNR slots
- ***VGA:** VIA VT8601T integrated Trident 3D supporting AGP Bus
- ***Audio:** AC97 3D audio controller
- ***IDE:** Four IDE disk drives supporting ATA/33/66/100 and with transfer rates of 33/66/100MB/sec.
- ***FDD:** Supports up to two floppy disk drives
- ***Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- ***Serial Port:** 16C550 UART-compatible RS-232 x 1 serial ports with 16-byte FIFO
- ***Game Port:** Supports one Joystick game port
- ***USB:** Four USB ports, two internal and two external
- ***Keyboard:** PS/2 6-pin Mini DIN
- ***Mouse:** PS/2 6-pin Mini DIN
- ***BIOS:** AMI PnP Flash BIOS
- ***CMOS:** Battery backup
- ***Power Connector:** One 20-pin ATX power connector
- ***Temperature:** 0~+60°C (operating)
- ***Hardware Monitor:** VIA VT82C686B
- ***Dimensions:** 24.4(L) x 19.1(W) cm

■ Ordering Guide

- **HS-1000** Socket 370 133MHz FSB Industrial ATX Motherboard w/CRT & Audio



ISO-9001
Certification

Intel®
Communications
Alliance
Affiliate Member

