

# IZ1223M

## BASIC FUNCTION 8-DIGITS LCD CALCULATOR WITH TOUCH TONE AND PUNCTUATION FUNCTION

The IZ1223M is a single chip CMOS LSI with 8-digit arithmetic operation, single memory, extraction-of-square-root, percentage calculation and auto power off and punctuation and touch tone function, designed for FEM LCD operation with a 3.0V power supply.

### FUNCTIONS

- Four standard functions (+, -, ×, ÷)
- Auto constant calculations (constant: multiplicand, divisor, addend and subtrahend)
- Square and reciprocal calculations
- Mark-up and mark-down calculations
- Extraction of square root
- Percentage calculations
- Chain multiplication and division
- Power calculations
- Rough estimate calculations
- Touch tone function
- Punctuation comma display
- Clear key: ON/C, ON/CE, CE

### FEATURES

- Single chip CMOS construction
- Floating decimal point
- LCD direct drive
- Overflow indication: "E"
- Accumulating memory: M+, M-, RM, CM, RM/CM
- Bare chip available
- Mirror type

### ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Characteristic	Symbol	Value	Unit	Note
Terminal Voltage	$V_{GG}$	- 0.3 ~ + 3.5	V	1
	$V_{IN}$	- 0.3 ~ $V_{GG} + 0.3$	V	
Supply Voltage	$V_{GG}$	2.5 ~ 3.5	V	
Operating Temperature	$T_{OPR}$	0 ~ + 50	$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	- 55 ~ + 125	$^\circ\text{C}$	

**Note:** 1. Maximum voltage on any pin with respect to the GND

### ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ , $V_{GG} = 3.0\text{V}$ , unless otherwise specified)


Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit	
Input Voltage 1 (K2 ~ K6, TI, S2)	$V_{IH1}$		$V_{GG} - 0.4$			V	
	$V_{IL1}$				0.4		
Input Voltage 2 (S1)	$V_{IH2}$		$V_{GG} - 0.4$			V	
	$V_{IL2}$				0.2		
Input Current 1 (K2 ~ K6, TI)	$I_{IH1}$	$V_{IN} = V_{GG}$			1	$\mu\text{A}$	
	$I_{IL1}$	$V_{IN} = 0\text{V}$		5.5	10		
Input Current 2 (S2)	$I_{IH2}$	$V_{IN} = V_{GG}$			1	$\mu\text{A}$	
	$I_{IL2}$	$V_{IN} = 0\text{V}$			1		
Input Current 3 (S1)	$I_{IH3}$	$V_{IN} = V_{GG}$	S2=GN D		1	$\mu\text{A}$	
	$I_{IL3}$	$V_{IN} = 0\text{V}$		5	10		15
Input Current 4 (S1)	$I_{IH4}$	$V_{IN} = V_{GG}$	S2 =	20	30	40	$\mu\text{A}$

# IZ1223M


Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
	$I_{IL4}$	$V_{IN} = 0V$   $V_{GG}$			1	
Output Voltage 1 (P1, P2, A2~A5)	$V_{OH1}$	without load	$V_{GG} - 0.15$			V
	$V_{OL1}$	$I_{OUT} = 15\mu A$			0.15	
Output Voltage 2 (H1 ~ H3, a1 ~ a9, b1 ~ b8, c1 ~ c8)	$V_{OA}$	without load	2.80	2.95		V
	$V_{OB}$	without load	1.30	1.50	1.70	
	$V_{OC}$	without load		0	0.20	
Display Frequency	$F_d$	$V_{GG} = 3V$ while display is on,	50	75		Hz
Touch Tone (PO)	$I_{OL}$	$V_{GG} = 3V, V_{OL} = 0.5V, T_I = 3V$	3			mA
Output Drive Current	$I_{OH}$	$V_{GG} = 3V, V_{OL} = 0.5V, T_I = 3V$	-3			
Dissipation	$I_{OFF} (1)$	Display off, $V_{GG} = 3V$			0.1	
	$I_{dis} (2)$	$V_{GG} = 3V$ while display is on,		20	30	$\mu A$

NOTE: 1) Measured by the next test circuit after power supply automatically turns off.  
 2) Measured by the next test circuit while "0" is being displayed after auto clear operation and while key is not being depressed.

OUTPUT WAVEFORM 1;  $H_i$  ( $i = 1, 2, 3$ )

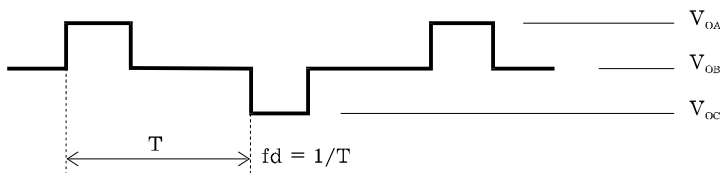

OUTPUT WAVEFORM 2;  $a_i, b_i, c_i$  ( $i = 1, 2, \dots, 8$ )

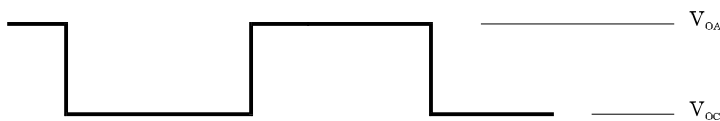

## FUNCTIONAL DESCRIPTION

### Decimal point system

Complete floating decimal point system.

**Integral number** : 8 digits leading zero suppression. Zero shift.

**Symbols** : - : negative number display  
 E : error display  
 M : memory display  
 , : punctuation comma  
 ♪ : touch tone indicator

## Error detections

- **System errors occur when:**

- 1) The integral part of any memory calculation result exceeds 8 digits.
- 2) The division by zero.
- 3) The extraction of square root of a negative number.

- **Rough estimate calculation error**

When the integral part of the result of any standard functions, percentage, square, reciprocal, or power calculations exceed 8 digits.

## Error indication

- **System error**

“0” is indicated in the 1-digit position and “E” in the sign-digit position.

- **Rough estimate calculation error**

The high-order 8-digit calculation result is indicated together with “E”.

The decimal point is indicated in the position corresponding to a calculation result of time  $10^{-8}$ , and no zero shift is performed

## Error release

- **System error**

A system error can be release by the ON/C or ON/CE key.

- **Rough estimate calculation error**

A rough estimate calculation error can be released by the ON/C, ON/CE, CE key.

A calculation result is not cleared by ON/CE, CE key but is retained.

## Number entry

Numerical can be entered up to 8 digits. Numerical entries equal to 9 digits or more are ignored.

## Memory protection

In any error detection, the memory content is retained.


## Memory indication

If the memory content is not zero, “M” is indicated in the sign-digit position.

## Doubler key depression

The order of the priority when two keys are being depressed simultaneously, is as follows:

# IZ1223M

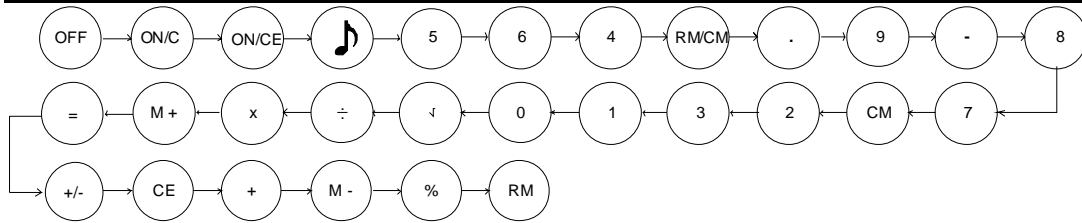

When the OFF and ON/C key are depressed simultaneously, the OFF key is given priority.

## Key bounce protection

### Front edge

Down to 1 word and up to about 3 words.

### Trailing edge

9 words


1 word is 3.3ms when display frequency is  $f_d = 100\text{Hz}$ .

## DISPLAY FONTS


### • Numericals font



### Sigh font



Memory



error



minus




punctuation




touch tone indicator

## LCD connector

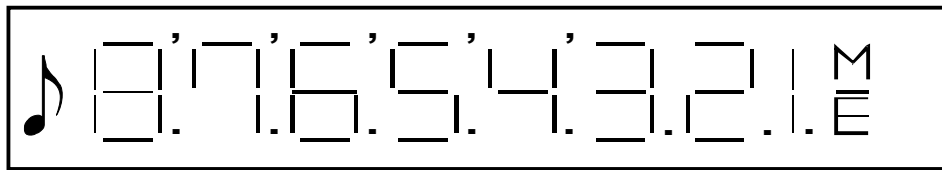

H2 H3 a9 c8 b8 a8 c7 b7 a7 c6 b6 a6 c5 b5 a5 c4 b4 a4 c3 b3 a3 c2 b2 a2 c1 b1 a1 H1

# IZ1223M

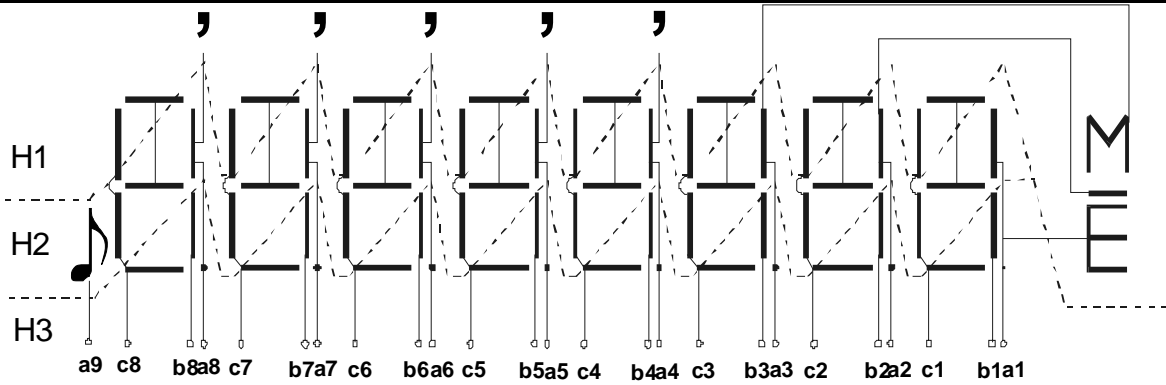

## AUTO POWER OFF


Power automatically turns off after 9 - 11 minutes pass from the last key pressure. ( $S_1 = \text{Low}$ ,  $S_2 = \text{High}$ )

## ON/C KEY

All operations except memory content are cleared by ON/C key.

## TOUCH TONE (J) KEY

- When power is ON, the touch tone function is enable and the beep sound is generated output during 125ms and J sing is displayed on LCD.
- Selection of touch tone function is toggled by touch tone key.
- Output wave form.

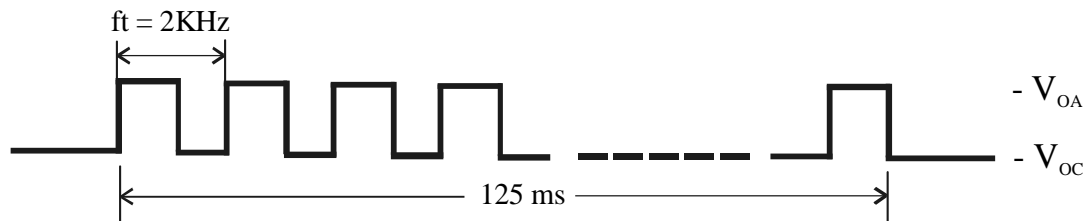


## MARK-UP AND MARK-DOWN CALCULATION

Mark-up and mark-down calculation are performed as follows.

ENTRY		DISPLAY	
A	A	A	A
±	x	A	A
B	B	B	B
%	%	$A \pm AB/100$	$AB/100$
	+OR-		$AB/100$
	=		$A+AB/100$ OR $A--AB/100$


# IZ1223M

## APPLICATION CIRCUIT

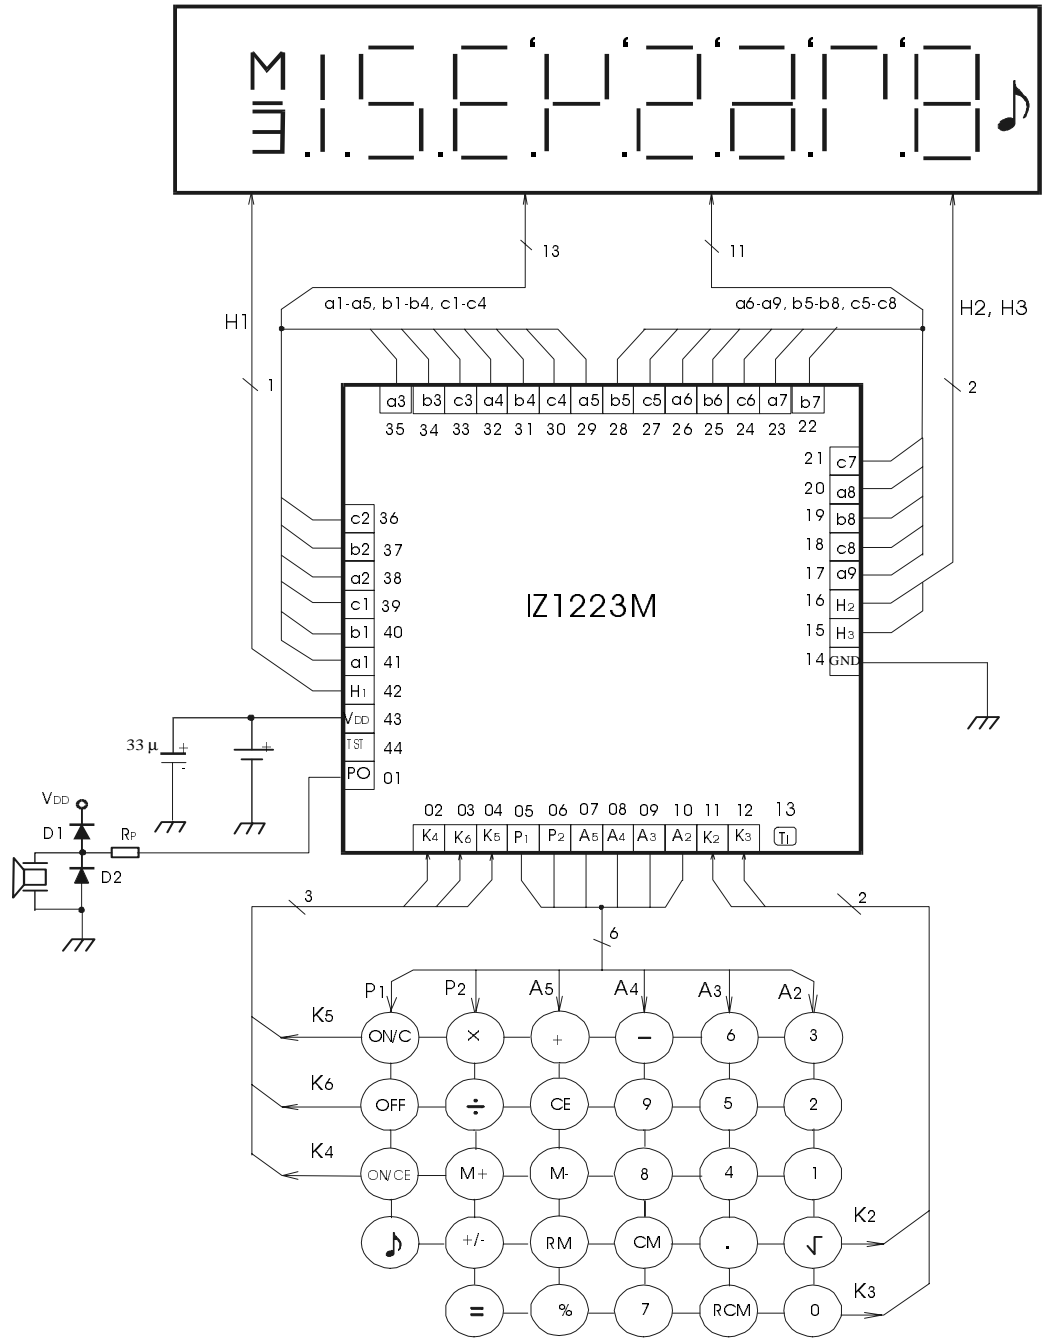

# IZ1223M

## PAD DIAGRAM

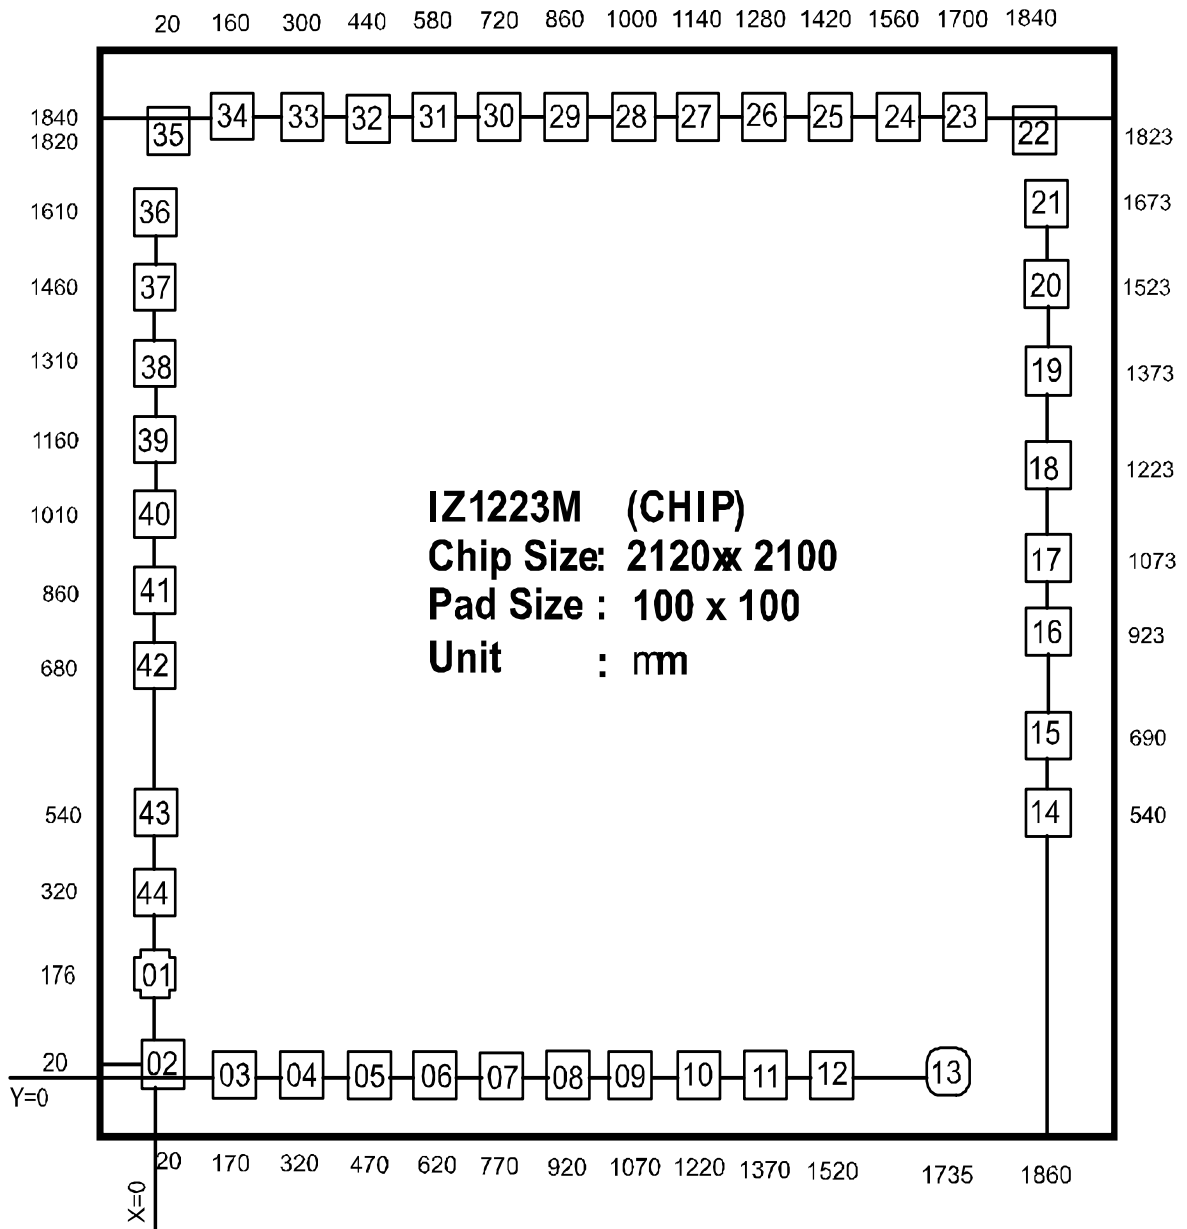

# IZ1223M

## PIN DESCRIPTION

Pa d	Pad Name	I/O	Description	Pad No.	Pad Name	I/O	Description
1	PO	O	Piezo output	23	a7	O	Display output
2	K4	I	Key input	24	c6	O	Display output
3	K6	I	Key input	25	b6	O	Display output
4	K5	I	Key input	26	a6	O	Display output
5	P1	O	Strobe output	27	c5	O	Display output
6	P2	O	Strobe output	28	b5	O	Display output
7	A5	O	Strobe output	29	a5	O	Display output
8	A4	O	Strobe output	30	c4	O	Display output
9	A3	O	Strobe output	31	b4	O	Display output
10	A2	O	Strobe output	32	a4	O	Display output
11	K2	I	Key input	33	c3	O	Display output
12	K3	I	Key input	34	b3	O	Display output
13	Ti	I	Test input	35	a3	O	Display output
14	GND		Ground	36	c2	O	Display output
15	H3	O	COMMON 3	37	b2	O	Display output
16	H2	O	COMMON 2	38	a2	O	Display output
17	a9	O	Display output	39	c1	O	Display output
18	c8	O	Display output	40	b1	O	Display output
19	b8	O	Display output	41	a1	O	Display output
20	a8	O	Display output	42	H1	O	COMMON 1
21	c7	O	Display output	43	V <sub>GG</sub>		Power supply
22	b7	O	Display output	44	TST	I	Test