


2-INPUT OR GATE

The KIC7S32FU is a high speed C²MOS 2-INPUT OR GATE fabricated with silicon gate C²MOS technology. It achieves high speed operation similar to equivalent LSTTL while maintaining the C²MOS low power dissipation. The internal circuit is composed of 2 stages including buffer output, which enables high noise immunity and stable output. All inputs are equipped with protection circuits against static discharge or transient excess voltage.

FEATURES


- High Speed : $t_{pd}=7\text{ns}(\text{Typ.})$ at $V_{CC}=5\text{V}$.
- Low Power Dissipation : $I_{CC}=1\mu\text{A}(\text{Max.})$ at $T_a=25^\circ\text{C}$.
- High Noise Immunity : $V_{NIH}=V_{NIL}=28\%$ $V_{CC}(\text{Min.})$.
- Output Drive Capability : 5 LSTTL Loads.
- Symmetrical Output Impedance : $|I_{OH}|=I_{OL}=2\text{mA}(\text{Min.})$
- Balanced Propagation Delays : $t_{pLH}=t_{pHL}$
- Wide Operating Voltage Range : $V_{CC(\text{opr})}=2\sim6\text{V}$.

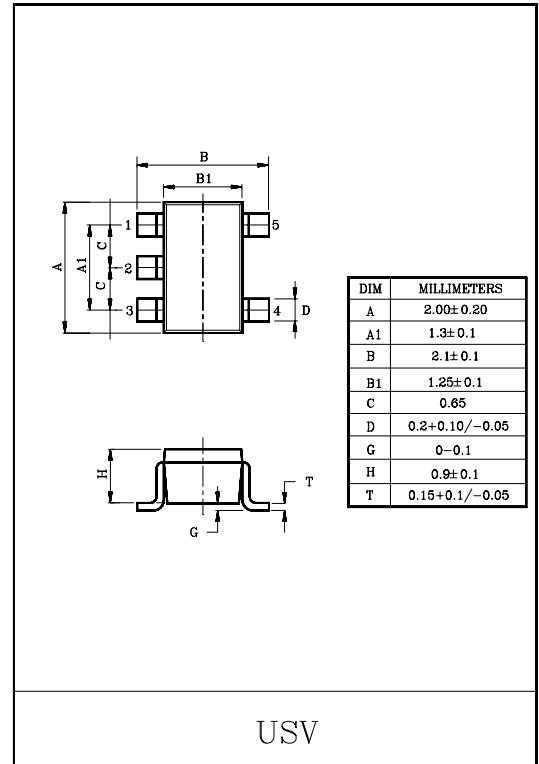


MAXIMUM RATINGS

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------------------|-----------|-----------------------|------|
| Supply Voltage Range | V_{CC} | $-0.5\sim7$ | V |
| DC Input Voltage | V_{IN} | $-0.5\sim V_{CC}+0.5$ | V |
| DC Output Voltage | V_{OUT} | $-0.5\sim V_{CC}+0.5$ | V |
| Input Diode Current | I_{IK} | ± 20 | mA |
| Output Diode Current | I_{OK} | ± 20 | mA |
| DC Output Current | I_{OUT} | ± 12.5 | mA |
| DC V_{CC}/Ground Current | I_{CC} | ± 25 | mA |
| Power Dissipation | P_D | 200 | mW |
| Storage Temperature | T_{stg} | $-65\sim150$ | °C |
| Lead Temperature (10s) | T_L | 260 | °C |

MARKING

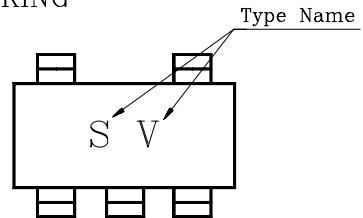


PIN CONNECTION(TOP VIEW)

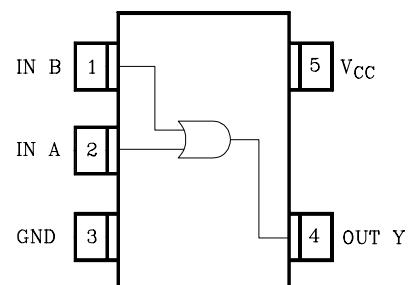

KIC7S32FU

LOGIC DIAGRAM

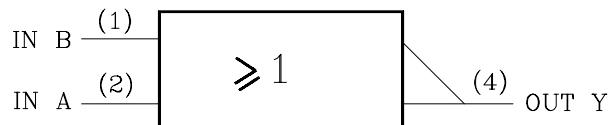

RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|--------------------------|---------------------------------|--|------|
| Supply Voltage | V _{CC} | 2~6 | V |
| Input Voltage | V _{IN} | 0~V _{CC} | V |
| Output Voltage | V _{OUT} | 0~V _{CC} | V |
| Operating Temperature | T _{opr} | -40~85 | °C |
| Input Rise and Fall Time | t _r , t _f | 0~1000 (V _{CC} =2.0V) 0~ 500 (V _{CC} =4.5V) 0~ 400 (V _{CC} =6.0V) | ns |

DC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC | SYMBOL | TEST CONDITION | | Ta=25°C | | | Ta=-40~85°C | | UNIT |
|---------------------------|-----------------|---|-------------------------|---------|------|------|-------------|------|------|
| | | | V _{CC} | MIN. | TYP. | MAX. | MIN. | MAX. | |
| High-Level Input Voltage | V _{IH} | - | 2.0 | 1.5 | - | - | 1.5 | - | V |
| | | | 4.5 | 3.15 | - | - | 3.15 | - | |
| | | | 6.0 | 4.2 | - | - | 4.2 | - | |
| Low-Level Input Voltage | V _{IL} | - | 2.0 | - | - | 0.5 | - | 0.5 | V |
| | | | 4.5 | - | - | 1.35 | - | 1.35 | |
| | | | 6.0 | - | - | 1.8 | - | 1.8 | |
| High-Level Output Voltage | V _{OH} | V _{IN} =V _{IH} or V _{IL} | I _{OH} =-20μA | 2.0 | 1.9 | 2.0 | - | 1.9 | V |
| | | | I _{OH} =-20μA | 4.5 | 4.4 | 4.5 | - | 4.4 | |
| | | V _{IN} =V _{IL} | I _{OH} =-2mA | 6.0 | 5.9 | 6.0 | - | 5.9 | |
| | | | I _{OH} =-2.6mA | 4.5 | 4.18 | 4.31 | - | 4.13 | |
| Low-Level Output Voltage | V _{OL} | V _{IN} =V _{IL} | I _{OL} =20μA | 6.0 | 5.68 | 5.80 | - | 5.63 | V |
| | | | I _{OL} =20μA | 2.0 | - | 0.0 | 0.1 | - | |
| | | V _{IN} =V _{IL} | I _{OL} =2mA | 4.5 | - | 0.17 | 0.26 | - | |
| | | | I _{OL} =2.6mA | 6.0 | - | 0.18 | 0.26 | - | |
| Input Leakage Current | I _{IN} | V _{IN} =V _{CC} or GND | 6.0 | - | - | ±0.1 | - | ±1.0 | μA |
| Quiescent Supply Current | I _{CC} | V _{IN} =V _{CC} or GND | 6.0 | - | - | 1.0 | - | 10.0 | |

KIC7S32FU

AC ELECTRICAL CHARACTERISTICS ($C_L=15\text{pF}$, Input $t_r=t_f=6\text{ns}$, $V_{CC}=5\text{V}$)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | Ta=25°C | | | UNIT |
|------------------------|------------------------|----------------|---------|------|------|------|
| | | | MIN. | TYP. | MAX. | |
| Output Transition Time | t_{TLH} t_{THL} | - | - | 5 | 10 | ns |
| Propagation Delay Time | t_{pLH} t_{pHL} | - | - | 7 | 15 | ns |

AC ELECTRICAL CHARACTERISTICS ($C_L=50\text{pF}$, Input $t_r=t_f=6\text{ns}$)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | | Ta=25°C | | | Ta=-40~85°C | | UNIT |
|-------------------------------|------------------------|----------------|-----------------|---------|------|------|-------------|------|------|
| | | | V _{CC} | MIN. | TYP. | MAX. | MIN. | MAX. | |
| Output Transition Time | t_{TLH} t_{THL} | - | 2.0 | - | 50 | 125 | - | 155 | ns |
| | | | 4.5 | - | 14 | 25 | - | 31 | |
| | | | 6.0 | - | 12 | 21 | - | 26 | |
| Propagation Delay Time | t_{pLH} t_{pHL} | - | 2.0 | - | 48 | 100 | - | 125 | ns |
| | | | 4.5 | - | 12 | 20 | - | 25 | |
| | | | 6.0 | - | 9 | 17 | - | 21 | |
| Input Capacitance | C _{IN} | - | - | - | 5 | 10 | - | 10 | pF |
| Power Dissipation Capacitance | C _{PD} | (Note 1) | - | - | 10 | - | - | - | |




Note 1 : C_{PD} defined as the value of internal equivalent capacitance of IC which is calculated from the operating current consumption without load (refer to Test Circuit.)

Average operating current can be obtained by the equation hereunder.

$$I_{CC(\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$

SWITCHING CHARACTERISTICS TEST CIRCUIT

I_{CC(opr)} TEST CIRCUIT

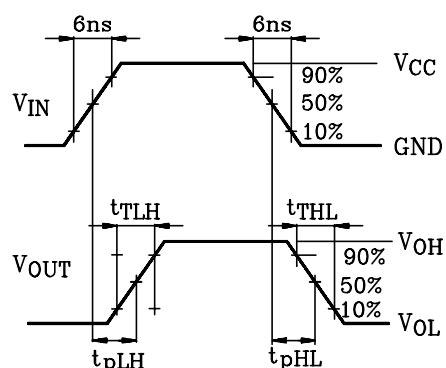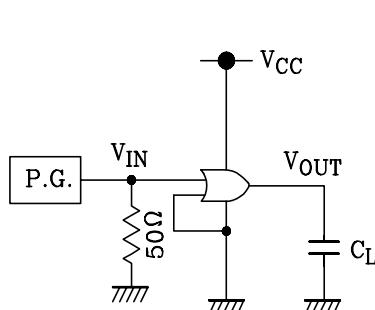

Input waveform is the same as that in case of switching characteristics test.