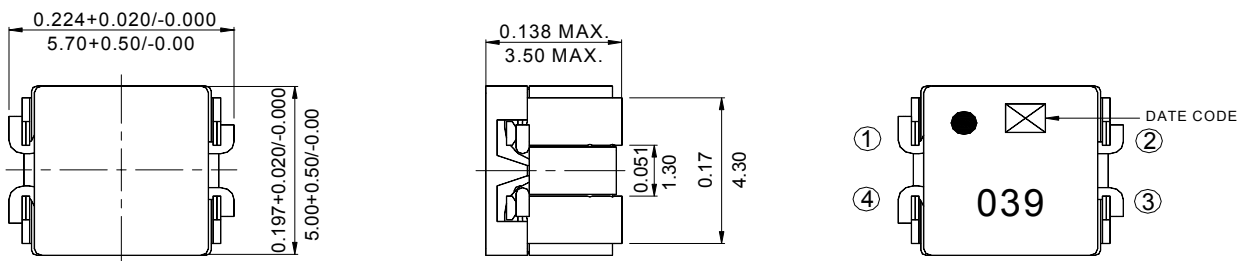


Type: CSFC5D33
CISCO USE ONLY
◆ Product Description

- 6.2 × 5.5mm Max.(L × W), 3.5mm Max. Height.


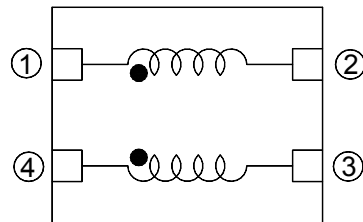
◆ Feature

- Ideally used in IP Phones.
- RoHS Compliance.


◆ Dimensions (mm)


* Dimension does not include solder used on coil.

* Dimension without tolerance are approx.

◆ Land Pattern (mm)

◆ Schematics (Bottom)


“●” indicates the winding polarity.

◆ Specification

SPEC. NO.	Impedance (Ω)<Min.> 100MHz	D.C.R. (Ω)<Max.> (1-2),(4-3)	Insulation Resistance (M Ω)<Min.>	Rated current (A)	Rated Voltage (V) <Max.>
SI07-039	300 ± 25%	0.025	10M	2.5	80

※ Rated current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$).