

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASFLK SERIES



RoHS
Compliant



5.0 x 3.2 x 1.3mm

FEATURES:

- Pb-Free/RoHS Compliant
- Smallest industry package
- Tri state function
- Suitable for high density SMT
- IR reflow capable
- Seam sealed

APPLICATIONS:


- CCD clock for VTR camera
- Computers and peripherals
- Portable MP3 players and games

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N:	ASFLK Series
Frequency range:	32.768kHz
Operating temperature:	0°C to + 70°C (see options)
Storage temperature:	-55°C to +125°C
Overall Frequency Stability:	± 100ppm max. (see options)
Supply Voltage (Vdd):	3.3 Vdc ± 10% (see options)
Supply current:	0.5 mA max.
Symmetry:	40/60 % max. @ 1/2Vdd (see options)
Rise and fall time (Tr/Tf):	10 ns max.
Output Load:	15pF or 10TTL max.
Output Voltage:	VOL = 2.97V min.; VOH = 0.33V max.
Start-up-time:	10ms max.
Tristate function:	Logic "1" or open: Oscillation Logic "0" (VIL < 0.8 Vdc) : Hi Z
Aging at 25°C/year :	± 3ppm/year max.
Phase jitter:	1ps RMS max.

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

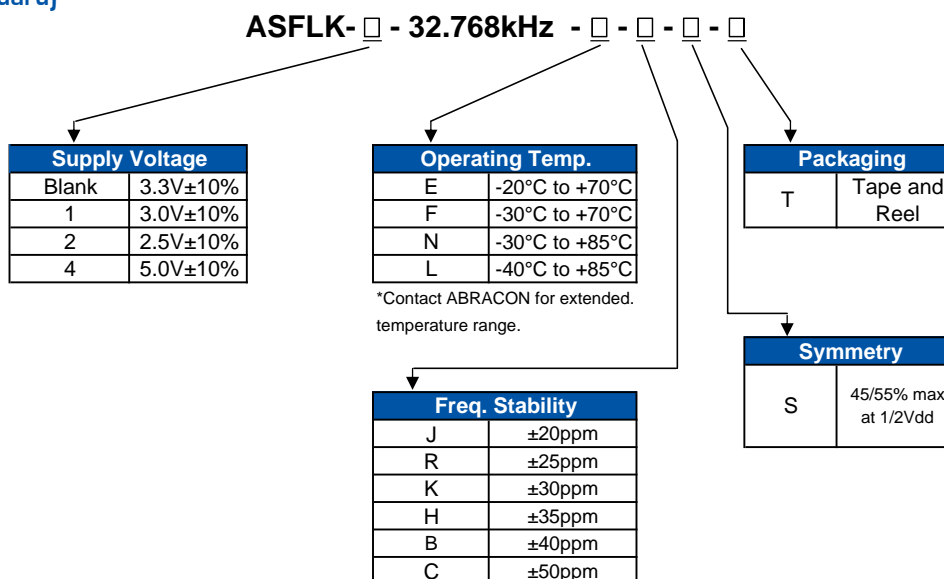

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASFLK SERIES




RoHS
Compliant




5.0 x 3.2 x 1.3mm

OUTLINE DRAWING:

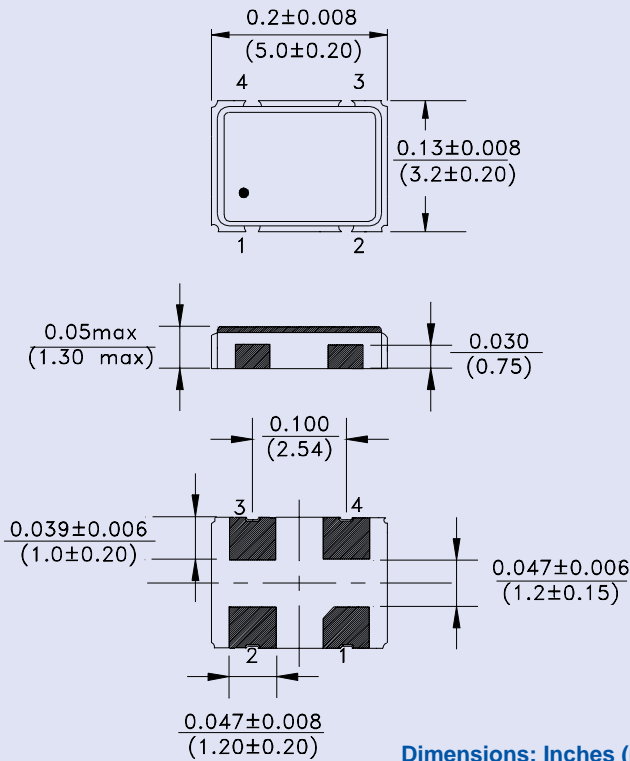


Recommended Land Pattern

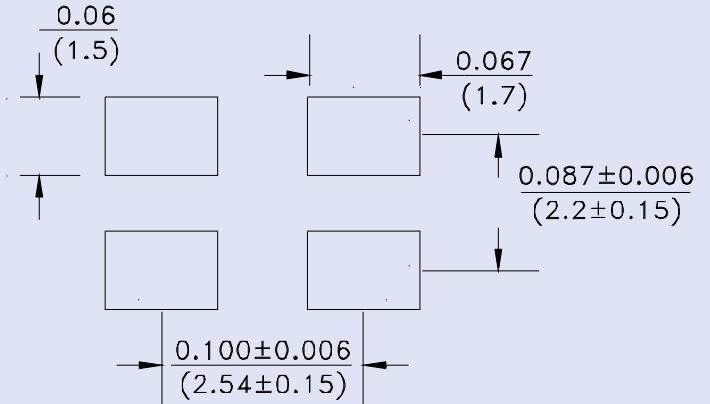

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

PIN	FUNCTION
1	E/D
2	GND
3	Output
4	Vdd

TAPE & REEL: Tape and reel (1,000pcs/reel)

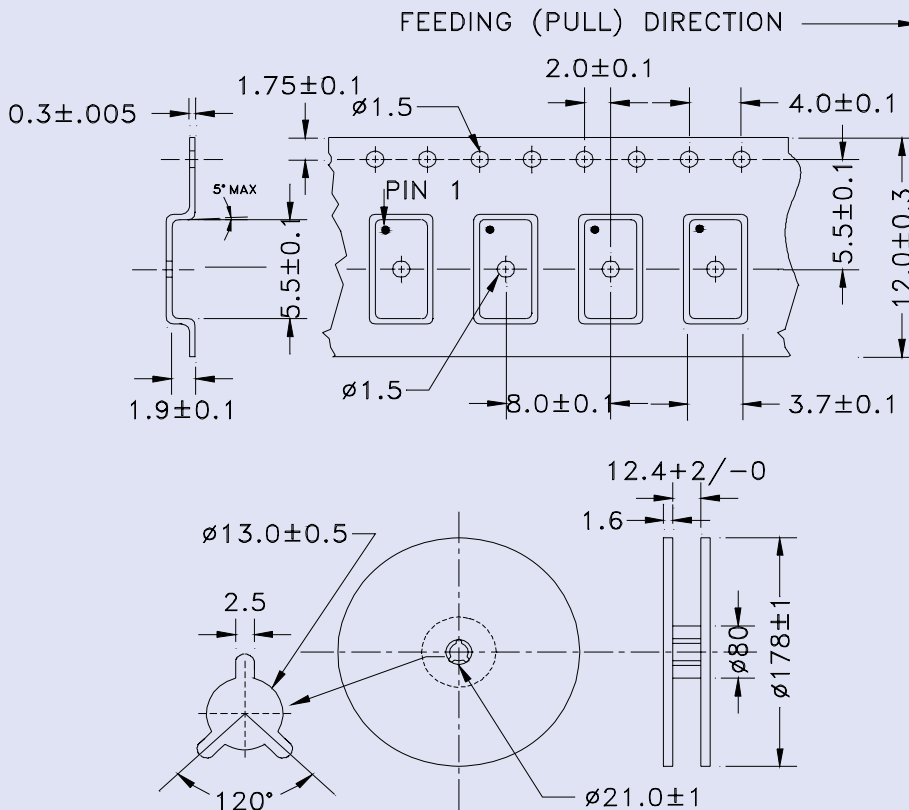

Dimensions: mm

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 03.03.08**
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com