

# Precision Sub-Miniature 3.2x5.0mm TCXO / VCTCXO



2111 Comprehensive Drive  
Aurora, Illinois 60505  
Phone: 630-851-4722  
Fax: 630-851-5040  
**www.conwin.com**  
US Headquarters:  
630-851-4722  
European Headquarters:  
+353-61-472221

## Description

The Connor-Winfield 3.2x5.0mm Temperature Compensated Crystal Oscillators and Voltage Controlled Temperature Compensated Crystal Oscillators are designed for use in applications requiring tight frequency stability in a small package. Through the use of Analog Temperature Compensation, this device is capable of holding sub 1-ppm stabilities over wide temperature ranges.




## Features:

- 2.5V or 3.3V Operation
- Clipped Sinewave Output Logic
- Sub-Miniature 3.2x5.0mm SMT Package
- Frequency Stabilities Available:  
±0.50ppm, ±1.00ppm or ±2.00ppm
- Temperature Ranges Available:  
0 to 70°C  
-20 to 70°C  
-30 to 85°C
- Low Power <2mA
- Low Jitter <1pS RMS
- Tape and Reel Packaging
- RoHS Compliant / Lead Free ✓RoHS
- Recommended for new designs

## Applications

GPS Receivers  
Instrumentation  
Femtocells  
FTTH, FTTC

## Package Layout

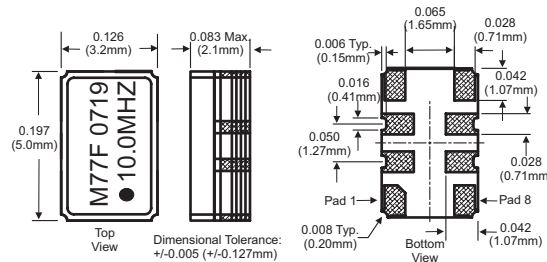

## Ordering Information

M77F - 010.0M

TCXO SERIES      Example Part Number      CENTER FREQUENCY

## Pin Connections

Pad	Connection
1	Voltage Control or N/C
2	N/C
3	Do not connect
4	Ground
5	Output
6	N/C
7	Do not connect
8	Supply, Vcc

## Ordering Information

M	7	7	F	-	010.0M
<b>Type:</b> Precision TCXO VCTCXO 3.2x5mm	<b>Features:</b> 4 = TCXO, Clipped Sinewave, 2.5Vdc. 7 = TCXO, Clipped Sinewave, 3.3Vdc. 8 = VCTCXO, Clipped Sinewave, 2.5Vdc. 9 = VCTCXO, Clipped Sinewave, 3.3Vdc.	<b>Temperature Range:</b> 5 = 0 to 70° C 7 = -20 to 70° C 8 = -30 to 85° C	<b>Frequency Stability:</b> E = ± 0.50 ppm F = ± 1.00 ppm G = ± 2.00 ppm		<b>Output Frequency:</b> Frequency Format -xxx.xM Min.* -xxx.xxxM Max.* *Amount of numbers after the decimal point. M = MHz

Example:  
M77F-010.0M = 3.2x5mm, TCXO, Clipped Sinewave,  
3.3Vdc, -20 to 70C, +/-1.00ppm, Output Frequency 10.0MHz

To order an M77F with an output frequency of:  
6.4 MHz = M77F-006.4M  
20 MHz = M77F-020.0M  
38.88 MHz = M77F-038.88M

## Standard Frequencies Available \*

6.4 MHz 9.72 MHz 10.0 MHz 10.24 MHz 12.5 MHz 12.8 MHz  
13.5 MHz 19.44 MHz 20.0 MHz 20.48 MHz 25 MHz 27 MHz 38.88 MHz

\* Available frequencies from the factory for small quantity orders or quick delivery. Additional frequencies are available.



Bulletin	<b>Tx193</b>
Page	<b>1 of 4</b>
Revision	<b>P05</b>
Date	<b>29 May 2008</b>

## Model Specifications

Model Number	M45E	M75E	M85E	M95E	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±0.50ppm				1
Temperature Range	0 to 70°C				

Model Number	M47E	M77E	M87E	M97E	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±0.50ppm				1
Temperature Range	-20 to 70°C				

Model Number	M48E	M78E	M88E	M98E	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±0.50ppm				1
Temperature Range	-30 to 85°C				

Model Number	M45F	M75F	M85F	M95F	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±1.00ppm				1
Temperature Range	0 to 70°C				

Model Number	M47F	M77F	M87F	M97F	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±1.00ppm				1
Temperature Range	-20 to 70°C				

Model Number	M48F	M78F	M88F	M98F	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±1.00ppm				1
Temperature Range	-30 to 85°C				

Model Number	M45G	M75G	M85G	M95G	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±2.0ppm				1
Temperature Range	0 to 70°C				

Model Number	M47G	M77G	M87G	M97G	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±2.0ppm				1
Temperature Range	-20 to 70°C				

Model Number	M48G	M78G	M88G	M98G	Note
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Supply Voltage	2.5Vdc	3.3Vdc	2.5Vdc	3.3Vdc	
Frequency Stability	±2.0ppm				1
Temperature Range	-30 to 85°C				

Note:


- 1) Frequency stability vs. change in temperature.  $[\pm (F_{max} - F_{min})/2.F_0]$ .



## Features

- 2.5V or 3.3V Operation
- Clipped Sinewave Output Logic
- Sub-Miniature 3.2x5.0mm SMT Package
- Frequency Stabilities Available:
  - ±0.50ppm, ±1.00ppm or ±2.00ppm
- Temperature Ranges Available:
  - 0 to 70°C
  - 20 to 70°C
  - 30 to 85°C
- Low Power <2mA
- Low Jitter <1pS RMS
- Tape and Reel Packaging
- RoHS Compliant / Lead Free
- Recommended for new designs

## Test Circuit

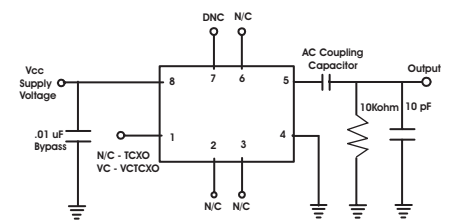

US Headquarters:  
630-851-4722  
European Headquarters:  
+353-61-472221

Bulletin	Tx193
Page	2 of 4
Revision	P05
Date	29 May 2008

## Electrical Specifications for all Models

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-55	-	125	°C	
Supply Voltage	(Vcc)	-0.5	-	6.0	Vdc	
Input Voltage	(Vc)	-0.5	-	Vcc+0.5	Vdc	

### OPERATING SPECIFICATIONS

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Frequency Range		6.4	-	40	MHz	
Frequency Calibration	(TCXO Models)	-1.00	-	1.00	ppm	1
Aging First Year		-1.0	-	1.0	ppm	
Total Aging for 10 years		-4.6	-	4.6	ppm	
Supply Voltage Variation. (Vcc±5%)		-0.025	-	0.025	ppm	
Load Coefficient, ±5pF		-0.025	-	0.025	ppm	
Static Temperature Hysteresis		-0.4	-	0.4	ppm	2
Frequency shift after reflow soldering		-1.00	-	1.00	ppm	3
Supply Voltage	2.5v Models (Vcc)	2.375	2.500	2.625	Vdc	4
	3.3v Models (Vcc)	3.135	3.300	3.465	Vdc	4
Supply Current	(Icc)	-	-	2	mA	
Jitter (BW=10Hz to 20MHz)		-	-	5	ps rms	
Jitter (BW=12kHz to 20MHz)		-	-	1	ps rms	
SSB Phase Noise at 10Hz offset		-	-80	-	dBc/Hz	
SSB Phase Noise at 100Hz offset		-	-110	-	dBc/Hz	
SSB Phase Noise at 1KHz offset		-	-130	-	dBc/Hz	
SSB Phase Noise at >10KHz offset		-	-145	-	dBc/Hz	

### INPUT CHARACTERISTICS for VOLTAGE CONTROL (Pad 1)

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	Notes
Control Voltage Range	2.5v Models (Vc)	0.2	1.2	2.2	Vdc	
	3.3v Models (Vc)	0.5	1.5	2.5	Vdc	
Frequency Tuning		±10	-	-	ppm	
Linearity		±5	-	-	%	
Slope		Positive				

### CLIPPED SINEWAVE OUTPUT CHARACTERISTICS (Pad 6)

PARAMETER	MINIMUM	NOMINAL	MAXIMUM	UNITS	Notes
Output Voltage	1.00	-	-	V pk-pk	
Load					5
Output Load Resistance	-	10K	-	Ohms	
Output Load Capacitance	-	10	-	pF	

### PACKAGE CHARACTERISTICS

Package	Ceramic Surface Mount Package.
---------	--------------------------------

### ENVIRONMENTALS

Vibration:	Vibration per Mil Std 883E Method 2007.3 Test Condition A
Shock:	Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering:	RoHS compliant, lead free. See solder profile page 4.
Solderability	Solderability per Mil Std 883E Method 2003

#### Note:


- 1) TCXO: Initial calibration @ 25 C. Specifications at time of shipment after 48 hours of operation.
- 2) Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C.
- 3) Within two hours after reflow.
- 4) For best in application performance, careful selection of an external power source is critical. Select an external regulator that meets or exceeds to following specifications regarding voltage regulation tolerance, initial accuracy, temperature coefficient, voltage noise, and low voltage noise density. **Factory Test Conditions:** Initial Accuracy ±2mv, Noise (0.1Hz to 10 KHz) 15uV p-p, Voltage Noise Density = 50nV/sqrt Hz, Temperature Coefficient < 5ppm/°C.
- 5) Output is DC coupled



## Features

2.5V or 3.3V Operation  
 Clipped Sinewave Output Logic  
 Sub-Miniature 3.2x5.0mm SMT Package  
 Frequency Stabilities Available:  
 ±0.50ppm, ±1.00ppm or ±2.00ppm  
 Temperature Ranges Available:  
 0 to 70°C  
 -20 to 70°C  
 -30 to 85°C  
 Low Power <2mA  
 Low Jitter <1ps RMS  
 Tape and Reel Packaging  
 RoHS Compliant / Lead Free  
 Recommended for new designs



## Test Circuit

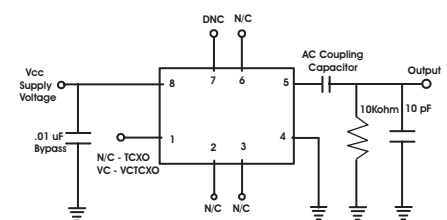



US Headquarters:  
 630-851-4722  
 European Headquarters:  
 +353-61-472221

Bulletin	Tx193
Page	3 of 4
Revision	P05
Date	29 May 2008


## Suggested Pad Layout

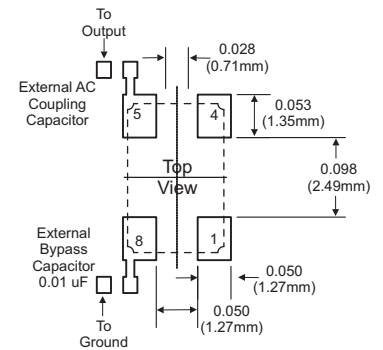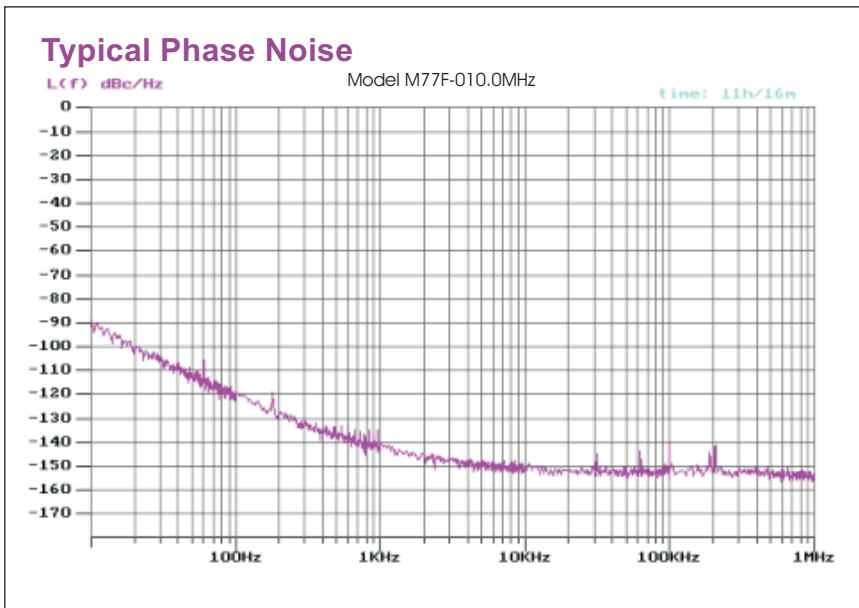

## Solder Profile

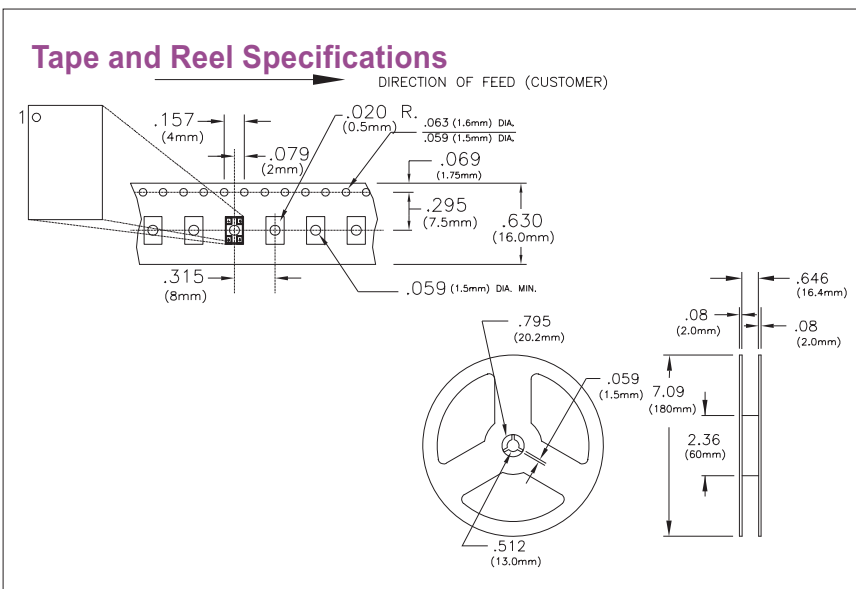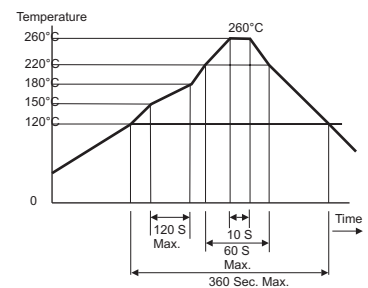

## Output Waveform

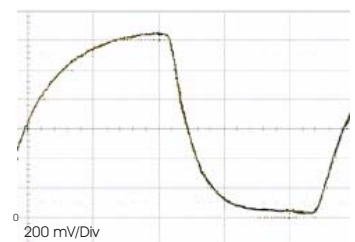

US Headquarters:  
630-851-4722

European Headquarters:  
+353-61-472221

Bulletin	Tx193
Page	4 of 4
Revision	P05
Date	29 May 2008