

8 - 18 GHz 15 dBm Amplifier
FEATURES

- P_{1dB}: 15 dBm
- Noise Figure: 4.5dB
- Small Signal Gain: 15 dB
- Bias Condition: 180 mA @ 12 V

ELECTRICAL SPECIFICATIONS

SYMBOL	DESCRIPTION	MIN	TYP	MAX	UNITS
FREQ	Frequency Range	8		18	GHz
SSG	Small Signal Gain @ 25°C	15	17		dB
GOF	Small Signal Gain Flatness @ 25°C		±1.0	±1.25	dB
P _{1dB}	Output Power at 1 dB Gain Compression @ 25°C	15	17		dBm
IP3	Third Order Intercept Point @ 25°C	25	27		dBm
NF	Noise Figure @ 25°C		4.0	4.5	dB
2 nd	Second Harmonic @ 25°C, P _{1dB}	30			dBc
VSWR, IN	Input VSWR @ 25°C			2:1	-----
VSWR, OUT	Output VSWR @ 25°C			2:1	-----
V _{dc}	DC Supply Voltage		12		Volt
I _{dc}	Current Supply (Small Signal Gain) @ 25°C		180	210	mA
OTR	Operating Temperature Range	-30		70	°C

CASE:HG4



4

3

DWG NO. DOC-907000-1 SH REV 2

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

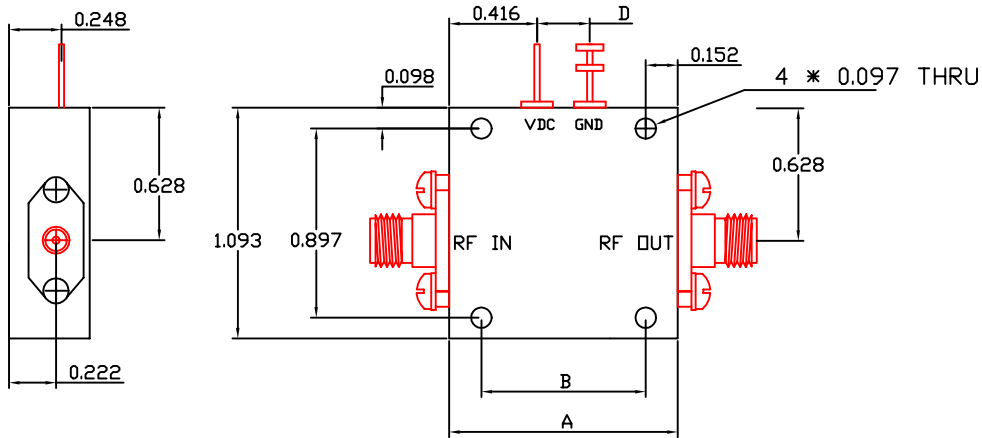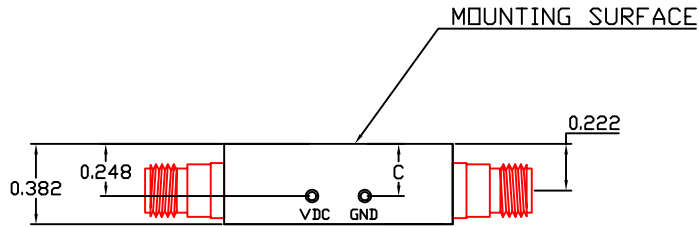

DIM	A	B	C	D
CASE				
HG2	0.841	0.537	0.080	0.13
HG3	1.083	0.779	0.248	0.25
HG4	1.333	1.029	0.248	0.25
HG5	1.583	1.279	0.248	0.25
HG6	1.833	1.529	0.248	0.25

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES		CONTRACT NO.		TRANSCOM, INC.
DECIMALS .XX ± .01	ANGULAR ±	DRAWN 宋君顯	DATE 05/23/2005	
.XXX ± .005	6.3	CHECK 張景學	DATE 05/23/2005	TITLE HOUSING OUTLINE HG
FINISH DO NOT SCALE DRAWING	MATERIAL ALUMINUM	PROJ ENGR	MFG ENGR	SIZE B
UNLESS OTHERWISE SPECIFIED BY CONTRACT THESE DRAWINGS AND SPECIFICATIONS AND DATA DISCLOSED HEREIN ARE THE PROPERTY OF TRANSCOM, ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR DISCLOSED IN WHOLE OR PART OR USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT THE PERMISSION OF TRANSCOM.	QA ENGR	RELSE DATE	SCALE	FSCM NO.
				DWG NO. DOC-907000-1
				REV 2
				SHEET 1 OF 1

4

3

2

1