



Dimensions:

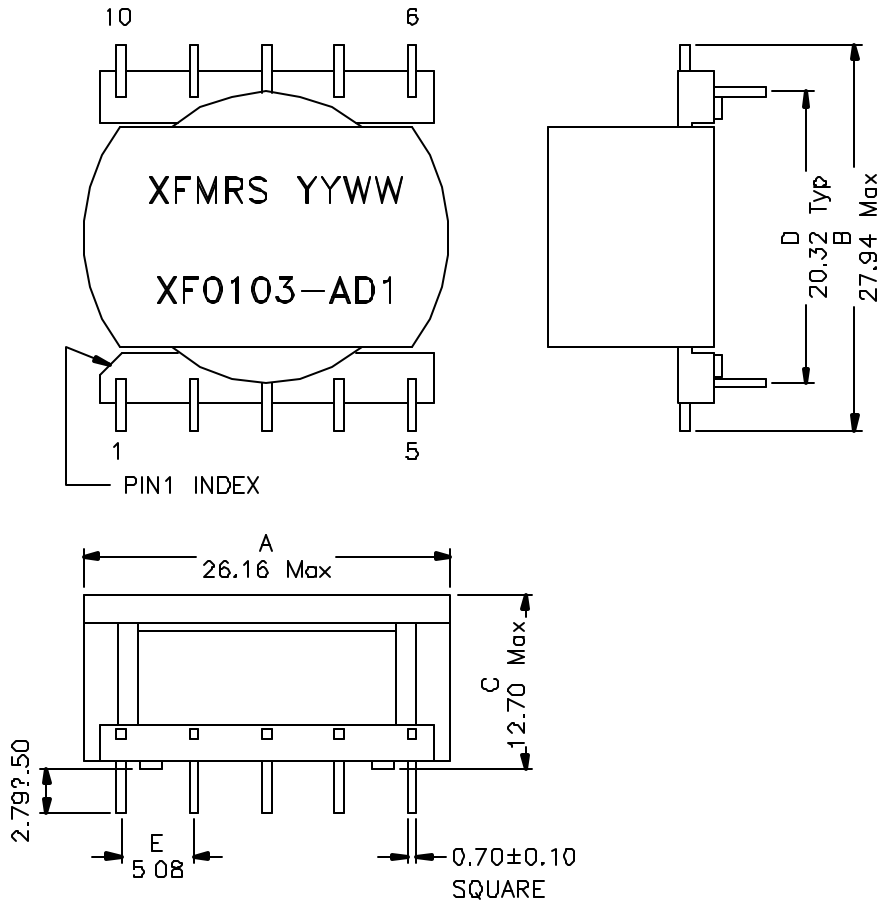

Schematic:



Electrical Specifications: @25°C

- HIPOT: 1500VAC between windings
- OCL: 10mH±5% @1KHz 1V 0mA to 100mA (each winding)
- DCR: 4.50 Ohms Max (each winding)

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV. A/1

XFMRS Inc	Title: COMMON MODE CHOKES		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0103-AD1	REV. A
	TOLERANCES: x.xx ±0.25	DWN. 李小锋	Jun-15-01
	Dimensions in MM	CHK. 廖玉坤	Jun-15-01
SHEET 1 OF 1	APP. BW	Jun-15-01	