

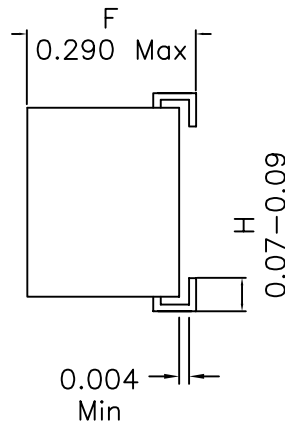


1. Mechanical Dimensions:

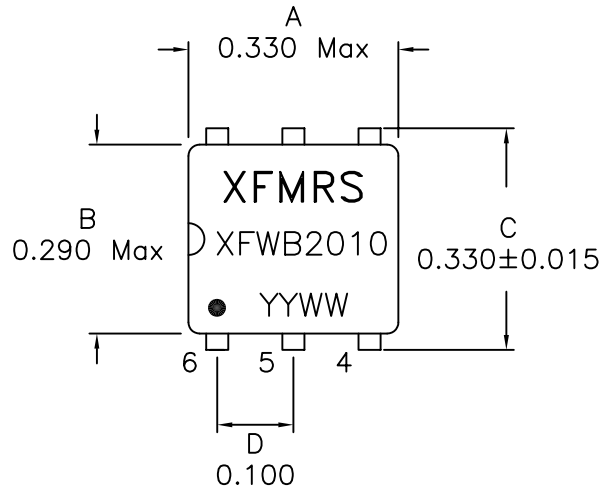

E
0.018±0.005


(SIDE VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV. A/6

2. Schematic:

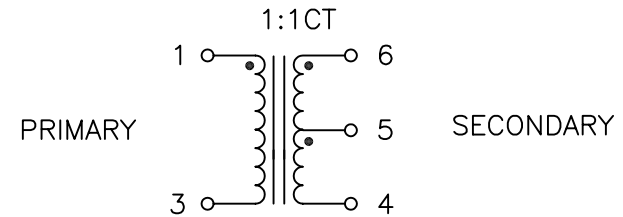

3. Electrical Specifications: @25°C

ISOLATION: 300VAC (PRI TO SEC)

TURNS RATIO: (1-3):(6-4)=1:1CT

OCL: 780uH Min @100KHz 50mV

DCR: 0.320 Ohms Max

Freq. Bandwidth: 3.0dB Typ. 0.0035-125MHz

Insertion Loss: 0.2dB Max

I_{dc}: 250mA

XFMRS Inc www.XFMRS.com		Title: RF TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XFWB2010	REV. A	
	DWN.	Xian yi	Jul-23-09
SHEET 1 OF 1	CHK.	YK Liao	Jul-23-09
	APP.	BW	Jul-23-09