



1

2

3



4

5


6

7

8

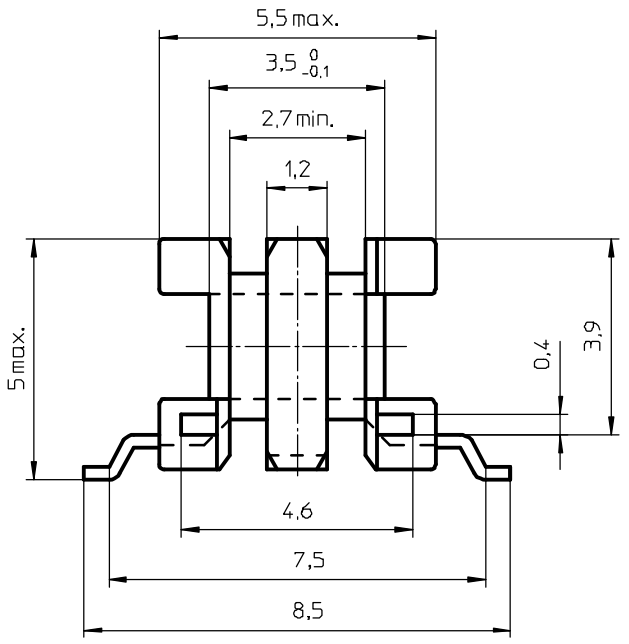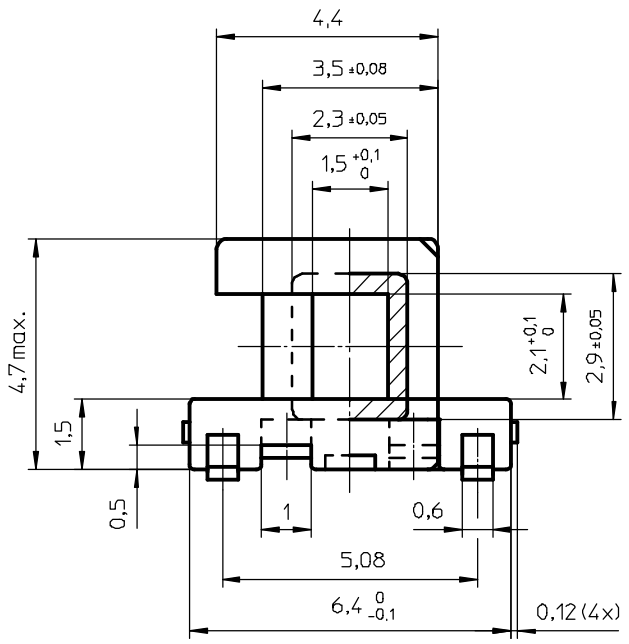

PROPOSED PAD ARRANGEMENT

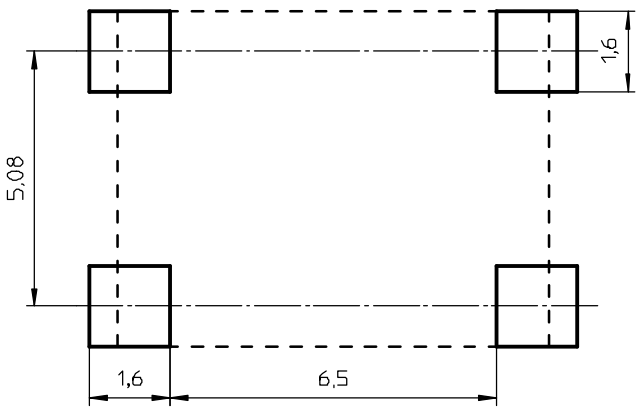

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705 - UL94V-0  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.  
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 0,9 mm<sup>2</sup>.  
 Mean length of turn: 12,8 mm.

CLASSNO				03-02-20	
CPHS-E6,3/2-2S-4P-Z		4322 021 06051			
NAME NAAM	M Veekens	SUPERS. VERV.	1	SH BL.	112 - 001
MPA	CHEK CONTR	DATE	03-02-20	Property of Eldemson van	© FERROXCUBE 2000
					<b>A3</b>

1

2

3

4