



**POWER MATE  
TECHNOLOGY CO.,LTD.**



Standard

Terminal Block

**APPLICATIONS**

Wireless Network  
Telecom/ Datacom  
Industry Control System  
Distributed Power Architectures  
Semiconductor Equipment

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C otherwise noted

<b>OUTPUT SPECIFICATIONS</b>		
Output power	100Watts, max.	
Voltage accuracy	Full load and Vin, nom	±1%
Voltage adjustability (Note 7)		+10%, -20%
Minimum load		0%
Line regulation	LL to HL at FL	See table
Load regulation	No Load to Full Load	See table
Remote sense (Note 8)		10% of Vout, nom
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02%/ °C, max.
Transient response recovery time	25% load step change	200µS
Over voltage protection threshold	(Hiccup)	115% ~ 130% of Vout, nom
Over current protection threshold		110% ~ 140% of Iout Rated
Short circuit protection		Hiccup, automatics recovery
<b>INPUT SPECIFICATIONS</b>		
Input voltage range	12V nominal input 24V nominal input 48V nominal input	9 – 18VDC 18 – 36VDC 36 – 75VDC
Start-up voltage	12V nominal input 24V nominal input 48V nominal input	8.5VDC 17.5VDC 35.5VDC
Shutdown voltage	12V nominal input 24V nominal input 48V nominal input	7.5VDC 16VDC 34VDC
Input filter		Pi type
Input surge voltage 100mS max	12V nominal input 24V nominal input 48V nominal input	36VDC 50VDC 100VDC
Input reverse protection (Note 9)		Parallel diode
Start up time	Vin, nom and constant resistive load	Power up Remote ON/OFF
Remote ON/OFF (Note 6) (Negative logic) (Standard)	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3V < Vr < 12V
(Positive logic) (Option)	DC-DC ON DC-DC OFF	Open or 3V < Vr < 12V Short or 0V < Vr < 1.2V
Input current of Remote control pin	Vin(nom)	-0.5mA ~ 1mA
Remote off input current	Vin(nom)	3mA



[WWW.PDUKE.COM](http://WWW.PDUKE.COM)

**HAE100 SERIES****FEATURES**

- OUTPUT CURRENT UP TO 25A
- 2:1 WIDE INPUT VOLTAGE RANGE
- HIGH EFFICIENCY UP TO 93%
- NO MINIMUM LOAD
- SOFT-START
- ADJUSTABLE OUTPUT VOLTAGE
- UNDER-VOLTAGE LOCKOUT
- INPUT REVERSE PROTECTION
- INDUSTRY STANDARD HALF-BRICK FOOTPRINT
- SIX-SIDED CONTINUOUS SHIELD
- INPUT TO OUTPUT BASIC INSULATION
- BUS TERMINAL BLOCK OPTION

**OPTIONS**

- Positive logic remote ON/OFF
- Pin length
- Terminal block
- Heat-sink
- Terminal block with EMC filter

**DESCRIPTION**

HAE100-SERIES DC/DC converters provide up to 100 watts of output power in an industry standard half-brick package and footprint. All models feature a wide input range and adjustable output voltage.

**GENERAL SPECIFICATIONS**

Efficiency	See table
Isolation voltage	Input to Output (Basic insulation) 2250VDC, min. Input (Output) to Case 1600VDC, min.
Isolation resistance	109ohms, min.
Isolation capacitance	2500pF, max.
Switching frequency	300KHz, typ.
Design meet safety standard	IEC60950-1, UL60950-1, EN60950-1
Case material	Metal
Base material	FR4 PCB
Potting material	Silicon (UL94-V0)
Dimensions	2.40 X 2.28 X 0.50 Inches (61.0×57.9×12.7 mm)
Weight	97g (3.4oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 1.010 x 106 hrs MIL-HDBK-217F 7.416 x 104 hrs

**ENVIRONMENTAL SPECIFICATIONS**

Operating ambient temperature (Note10)	Without Heat-sink -40°C ~ +35°C (without derating) +35°C ~ +77°C (with derating)
(For 3,3.5,12,15Vout)	With Heat-sink -40°C ~ +50°C (without derating) (0.24" Height) +50°C ~ +82°C (with derating)
Operating ambient temperature (Note10)	Without Heat-sink -40°C ~ +30°C (without derating) +30°C ~ +81°C (with derating)
(For 24,28,48Vout)	With Heat-sink -40°C ~ +44°C (without derating) (0.24" Height) +44°C ~ +85°C (with derating)

Maximum case temperature	105°C
Over temperature protection	115°C

Storage temperature range	-55°C to +125°C
Thermal impedance (Note 11)	without Heat-sink 6.7°C/watt with 0.24" Height Heat-sink 5.4°C/watt with 0.45" Height Heat-sink 4.7°C/watt
Thermal shock	MIL-STD-810F

Vibration	MIL-STD-810F
-----------	--------------

Relative humidity	5% to 95% RH
-------------------	--------------

**EMC CHARACTERISTICS (Note 12)**

EMI	EN55022	Class A
ESD	EN61000-4-2	Air Contact ± 8KV ± 6KV Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transien	EN61000-4-4	± 2KV Perf. Criteria A
Surge	EN61000-4-5	± 1KV Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A



**POWER MATE  
TECHNOLOGY CO.,LTD.**

# **100 WATTS DC-DC CONVERTER**

Model Number	Input Range	Output Voltage	Output Current		Line Regulation	Load Regulation	Output <sup>(4) (5)</sup> Ripple & Noise	Input Current		Eff <sup>(4)</sup> (%)
			Min. load	Full load				No Load <sup>(3)</sup>	Full Load <sup>(2)</sup>	
HAE100-12S3P3	9 – 18 VDC	3.3 VDC	0 mA	25 A	7 mV	10 mV	75 mVp-p	200 mA	7.768 A	90
HAE100-12S05	9 – 18 VDC	5 VDC	0 mA	20 A	10 mV	15 mV	75 mVp-p	210 mA	9.311 A	91
HAE100-12S12	9 – 18 VDC	12 VDC	0 mA	8.4 A	24 mV	30 mV	100 mVp-p	210 mA	9.385A	91
HAE100-12S15	9 – 18 VDC	15 VDC	0 mA	6.7 A	30 mV	38 mV	100 mVp-p	210 mA	9.358A	91
HAE100-12S24	9 – 18 VDC	24 VDC	0 mA	4.2 A	48 mV	48 mV	200 mVp-p	100 mA	9.492A	90
HAE100-12S28	9 – 18 VDC	28 VDC	0 mA	3.6 A	56 mV	56 mV	200 mVp-p	100 mA	9.492A	90
HAE100-12S48	9 – 18 VDC	48 VDC	0 mA	2.1 A	96 mV	72 mV	300 mVp-p	100 mA	9.492A	90
HAE100-24S3P3	18 – 36 VDC	3.3 VDC	0 mA	25 A	7 mV	10 mV	75 mVp-p	90 mA	3.841 A	91
HAE100-24S05	18 – 36 VDC	5 VDC	0 mA	20 A	10 mV	15 mV	75 mVp-p	185 mA	4.554 A	93
HAE100-24S12	18 – 36 VDC	12 VDC	0 mA	8.4 A	24 mV	30 mV	100 mVp-p	185 mA	4.590A	93
HAE100-24S15	18 – 36 VDC	15 VDC	0 mA	6.7 A	30 mV	38 mV	100 mVp-p	185 mA	4.577 A	93
HAE100-24S24	18 – 36 VDC	24 VDC	0 mA	4.2 A	48 mV	48 mV	200 mVp-p	85 mA	4.641A	92
HAE100-24S28	18 – 36 VDC	28 VDC	0 mA	3.6 A	56 mV	56 mV	200 mVp-p	85 mA	4.641A	92
HAE100-24S48	18 – 36 VDC	48 VDC	0 mA	2.1 A	96 mV	72 mV	300 mVp-p	85 mA	4.641A	92
HAE100-48S3P3	36 – 75 VDC	3.3 VDC	0 mA	25 A	7 mV	10 mV	75 mVp-p	80 mA	1.920 A	91
HAE100-48S05	36 – 75 VDC	5 VDC	0 mA	20 A	10 mV	15 mV	75 mVp-p	90 mA	2.277 A	93
HAE100-48S12	36 – 75 VDC	12 VDC	0 mA	8.4 A	24 mV	30 mV	100 mVp-p	90 mA	2.295A	93
HAE100-48S15	36 – 75 VDC	15 VDC	0 mA	6.7 A	30 mV	38 mV	100 mVp-p	90 mA	2.288 A	93
HAE100-48S24	36 – 75 VDC	24 VDC	0 mA	4.2 A	48 mV	48 mV	200 mVp-p	40 mA	2.320A	92
HAE100-48S28	36 – 75 VDC	28 VDC	0 mA	3.6 A	56 mV	56 mV	200 mVp-p	40 mA	2.320A	92
HAE100-48S48	36 – 75 VDC	48 VDC	0 mA	2.1 A	96 mV	72 mV	300 mVp-p	40 mA	2.320A	92

**Note**






1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
  2. Maximum value at nominal input voltage and full load.
  3. Typical value at nominal input voltage and no load.
  4. Typical value at nominal input voltage and full load.
  5. The ripple and noise of output voltage 48V is measured with a 2.2μF/100V X7R MLCC;  
The ripple and noise of other output voltage is measured with a 4.7μF/50V X7R MLCC.
  6. The remote ON/OFF control pin voltage is referenced to –Vin. The positive logic and pin length (DIM.) are optional.  
To order positive logic ON-OFF control of standard product add the suffix -P (Ex: HAE100-48S05-P).
  7. Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting a single resistor between TRIM and +SENSE pins for trim up or between TRIM and –SENSE pins for trim down. To calculate the value of the resistor Ru and Rd for a particular output voltage uses the following equation:
- $$R_U = \left( \frac{V_{OUT}(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) K\Omega$$
- $$R_D = \left( \frac{100}{\Delta\%} - 2 \right) K\Omega$$
8. Maximum output deviation is +10% inclusive of remote sense. If remote sense is not being used, the +SENSE should be connected to its corresponding +OUTPUT and likewise the -SENSE should be connected to its corresponding –OUTPUT.
  9. Internal fusing is not included, so we suggest to use an input line fuse.
  10. Test condition with vertical direction by natural convection (20LFM).
  11. Heat-sink is optional and P/N: 7G-0021A-F, 7G-0022A-F, 7G-0023A-F, 7G-0024A-F.
  12. The HAE100 series meets EMC characteristics only with external components connected before the input pin to the converter. If customer only need to meet EN61000-4-4, EN61000-4-5 ,an external input filter capacitor is required  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF /100V, ESR 48mΩ
  13. CASE GROUNDING : When you connect the case pin and the four screw bolts to shield plane, the EMI could be better reduced.






**POWER MATE  
TECHNOLOGY CO.,LTD.**

# 100 WATTS DC-DC CONVERTER

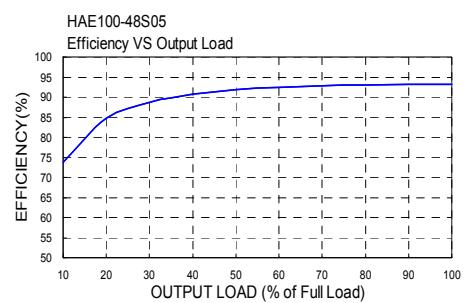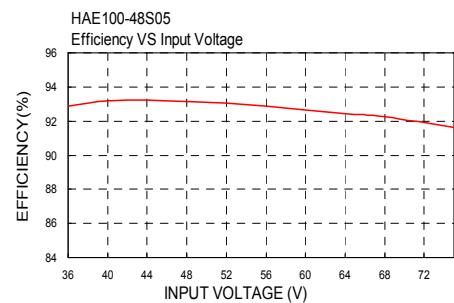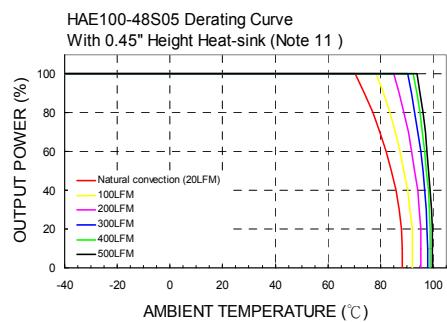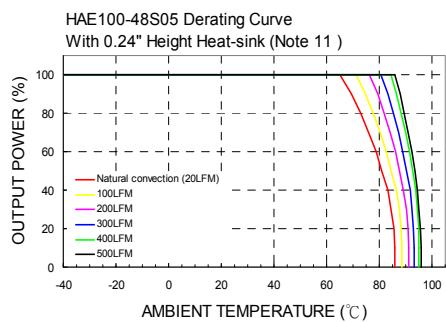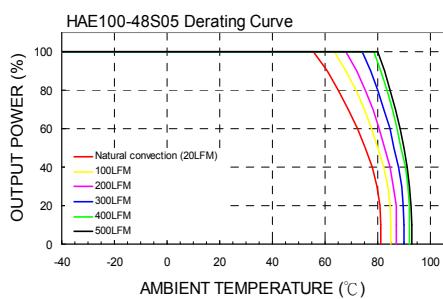


## EMI Filter For EN 55022 Class B Recommendation

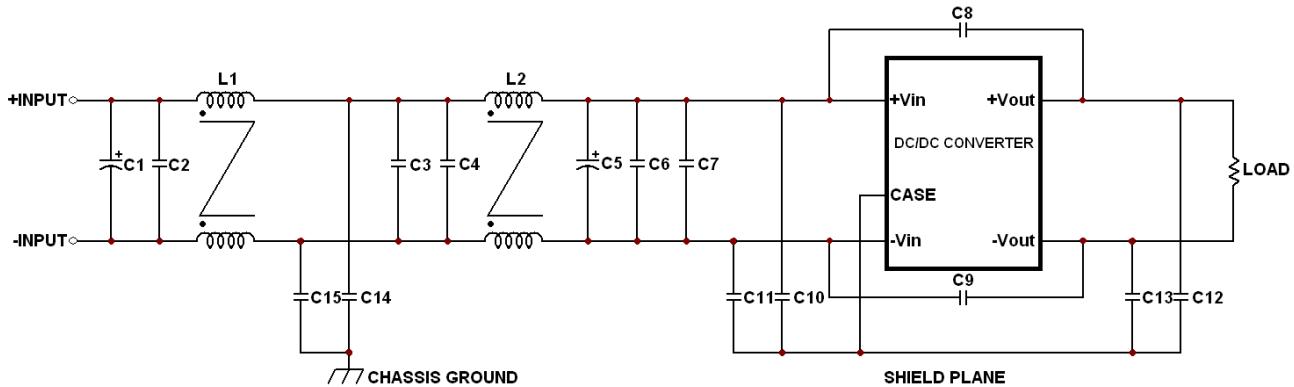

## Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1,C5	C2,C3,C4,C6,C7	C8	C9	C10,C11,C12,C13	C14,C15	L1	L2
HAE100-12SXX	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
HAE100-24SXX	100μF/50V 1812 MLCC	4.7μF/50V 1808 MLCC	1000pF/3KV 1808 MLCC	1000pF/3KV 1812 MLCC	10nF/2KV 1812 MLCC	1000pF/3KV 1808 MLCC	Common Choke PMT-073 305μH	Common Choke PMT-073 305μH
HAE100-48SXX	100μF/100V 1812 MLCC	2.2μF/100V 1808 MLCC	1000pF/3KV 1808 MLCC	4700pF/3KV 1812 MLCC	10nF/2KV 1812 MLCC	1000pF/3KV 1808 MLCC	Common Choke PMT-064 1400μH	Common Choke PMT-072 156μH

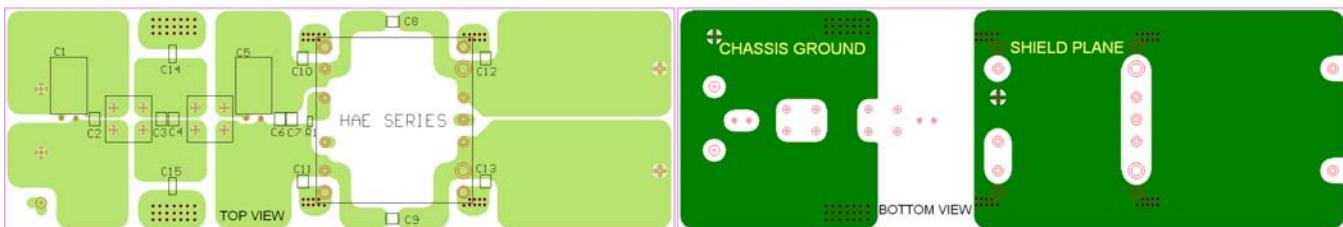

## Recommended EN55022 Class B Filter Circuit Layout






**POWER MATE  
TECHNOLOGY CO.,LTD.**


# 100 WATTS DC-DC CONVERTER

## Mechanical Drawing

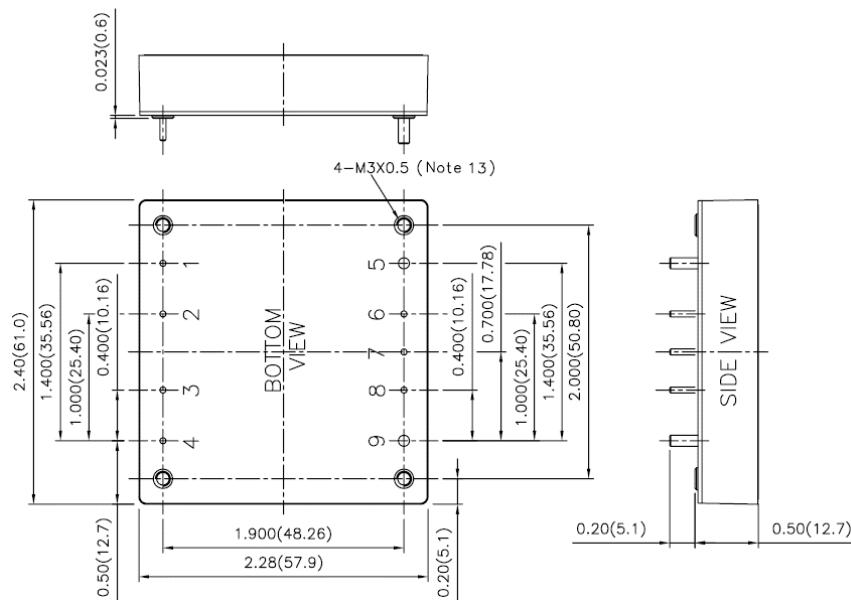

1. Pin 1,2,3,4,6,7,8. DIA. 0.040 (1.02mm)
2. Pin 5,9. DIA. 0.080 (2.03mm)
3. All dimensions in inches (mm)
4. Tolerance  $\pm 0.02$  ( $x \pm 0.5$ )
5. Pin pitch tolerance  $\pm 0.01$  ( $0.25$ )
6. Pin dimension tolerance  $\pm 0.004$  ( $0.1$ )

PIN CONNECTION		
PIN	Define	Diameter
1	- INPUT	0.04 Inches
2	CASE	0.04 Inches
3	CTRL	0.04 Inches
4	+ INPUT	0.04 Inches
5	- OUTPUT	0.08 Inches
6	- SENSE	0.04 Inches
7	TRIM	0.04 Inches
8	+ SENSE	0.04 Inches
9	+ OUTPUT	0.08 Inches

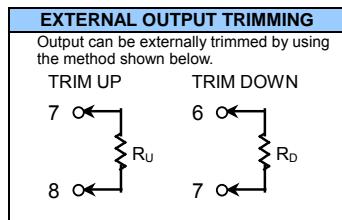


## Product Option


Product option	Suffix	Product option	Suffix
Negative remote ON/OFF logic	0.20" pin length	-	Heat-sink
	0.145" pin length	- L	H= 0.24" Vertical 7G-0023A-F - HS2
	0.11" pin length	- K	H= 0.45" Vertical 7G-0021A-F - HS
Positive remote ON/OFF logic	0.20" pin length	- P	H= 0.24" Horizontal 7G-0022A-F - HS1
	0.145" pin length	- S	H= 0.45" Horizontal 7G-0024A-F - HS3
	0.11" pin length	- M	Terminal Block
		Without EMC filter	- T
		With EMC filter	- TF

## Heat Sink Type (Suffix-HS)

Vertical Fin Orientation

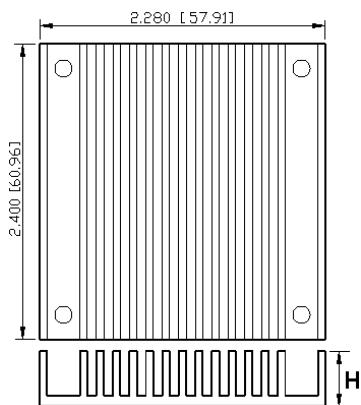

Horizontal Fin Orientation

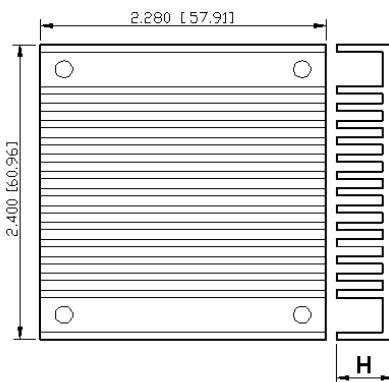



**POWER MATE  
TECHNOLOGY CO.,LTD.**



# **100 WATTS DC-DC CONVERTER**

## Terminal Block Type

Note : Terminal Block without EMC Filter (Suffix-T) and Terminal Block with EMC Filter (Suffix-TF)


The terminal block type of HAE100 can meet the EMC characteristics with an EMC filter. Followings are the mechanical drawings for reference. Pin assignments are same as standard type.

### 1) Terminal Block without EMC Filter (Suffix-T)

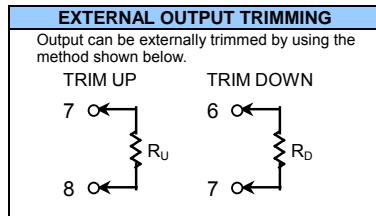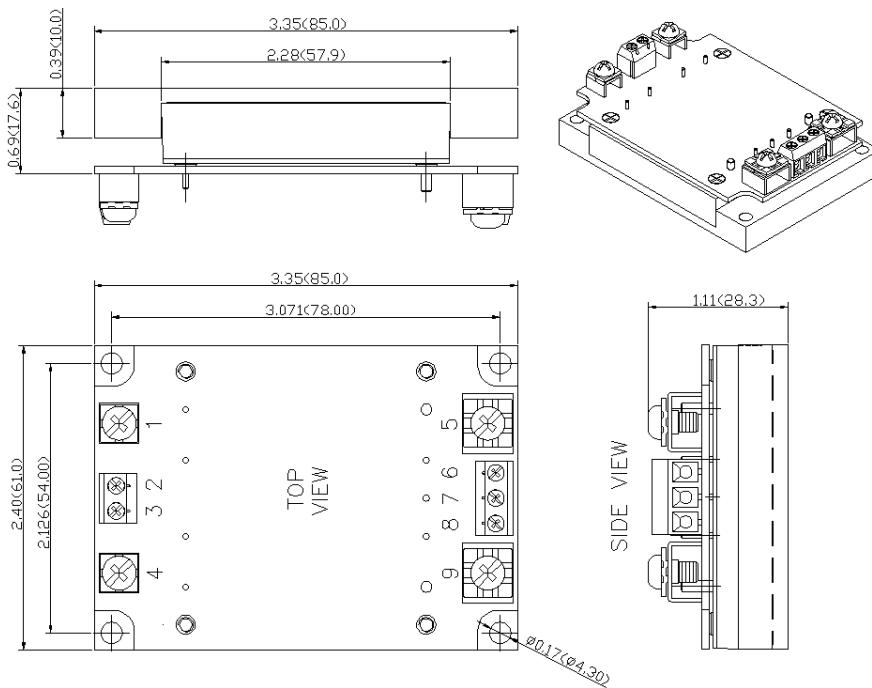

TERMINAL CONNECTION		
Terminal	Define	wire range
1	- INPUT	14 AWG to 16 AWG
2	CASE	14 AWG to 18 AWG
3	CTRL	14 AWG to 18 AWG
4	+ INPUT	14 AWG to 16 AWG
5	- OUTPUT	10 AWG to 12 AWG
6	- SENSE	14 AWG to 18 AWG
7	TRIM	14 AWG to 18 AWG
8	+ SENSE	14 AWG to 18 AWG
9	+ OUTPUT	10 AWG to 12 AWG

### 2) Terminal Block with EMC Filter (Suffix-TF)

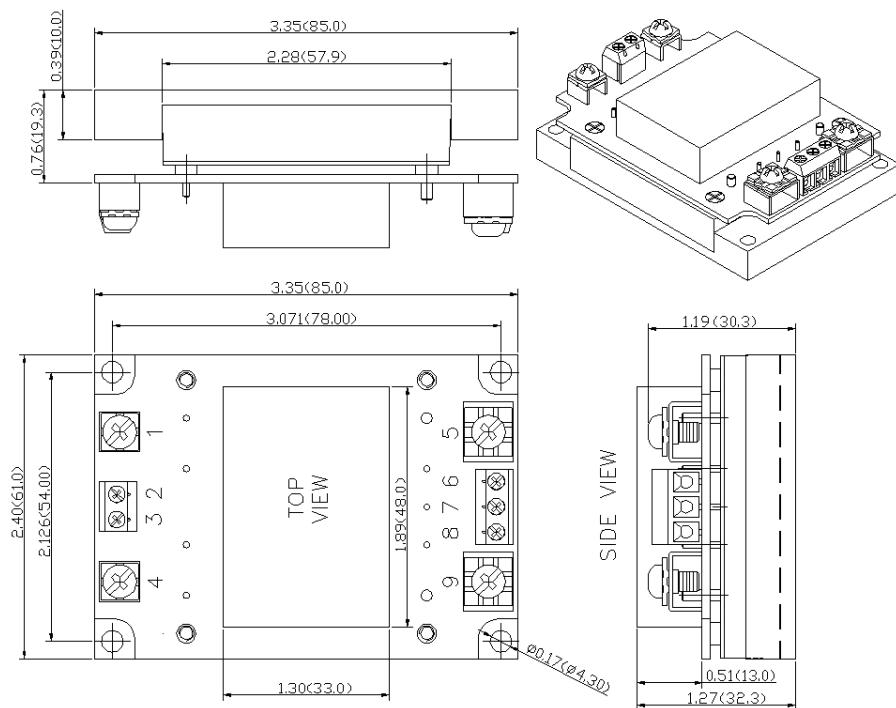

All dimensions in inches (mm)  
Tolerance :  $x.x\pm 0.02$  ( $x\pm 0.5$ )  
 $x.x\pm 0.01$  ( $x\pm 0.25$ )



**WWW.PDUKE.COM**

Page 5 of 5 Issued Date : 2009/01/13