


CTGS105 Series

From 4.7 μ H to 820 μ H

ENGINEERING KIT #7

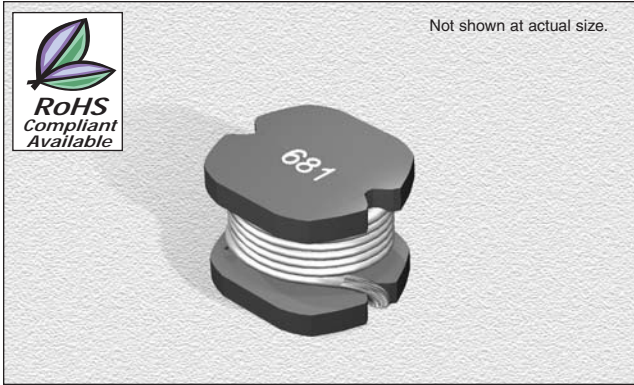

SPECIFICATIONS

Parts are marked to indicate tolerance available.

K = $\pm 10\%$, M = $\pm 20\%$

CTGS105F Please specify "F" for RoHS Compliant

Part Number	Inductance (μ H)	L Test Freq. (.Hz)	DCR Max. (Ω)	Rated DC (A)
CTGS105_4R7M	4.7	7.96M	.04	2.6
CTGS105_100M	10	2.52M	.06	2.6
CTGS105_120M	12	2.52M	.07	2.4
CTGS105_150M	15	2.52M	.08	2.3
CTGS105_180M	18	2.52M	.09	2.1
CTGS105_220M	22	2.52M	.10	1.9
CTGS105_270M	27	2.52M	.11	1.7
CTGS105_330M	33	2.52M	.12	1.5
CTGS105_390M	39	2.52M	.14	1.4
CTGS105_470K	47	2.52M	.17	1.3
CTGS105_560K	56	2.52M	.19	1.2
CTGS105_680K	68	2.52M	.22	1.1
CTGS105_820K	82	2.52M	.25	1.0
CTGS105_101K	100	1.0k	.35	.97
CTGS105_121K	120	1.0k	.40	.89
CTGS105_151K	150	1.0k	.47	.78
CTGS105_181K	180	1.0k	.63	.72
CTGS105_221K	220	1.0k	.73	.66
CTGS105_271K	270	1.0k	.97	.57
CTGS105_331K	330	1.0k	1.1	.52
CTGS105_391K	390	1.0k	1.3	.48
CTGS105_471K	470	1.0k	1.5	.42
CTGS105_561K	560	1.0k	1.9	.33
CTGS105_681K	680	1.0k	2.2	.28
CTGS105_821K	820	1.0k	2.5	.24

CHARACTERISTICS

Description: SMD power inductor

Applications: VTR power supplies, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters

Operating Temperature: -30°C to +100°C

Inductance Tolerance: $\pm 10\%$, $\pm 20\%$

Testing: Inductance is tested on an HP4284A or HP4285A at specified frequency

Packaging: Tape & Reel

Marking: Marked with inductance code

Rated DC: The value of current when the inductance is 10% lower than its initial value at 0 Adc or D.C. current when at $\Delta T = 40^\circ\text{C}$ whichever is lower


Miscellaneous: RoHS Compliant available.

Additional Information: Additional electrical & physical information available upon request


Samples available. See website for ordering information.

PHYSICAL DIMENSIONS

Size	A	B	C	D Typ.
mm	10 \pm 0.4	9 \pm 0.4	5.4 \pm 0.4	2.1
inches	0.39 \pm 0.016	0.35 \pm 0.016	0.21 \pm 0.016	0.083

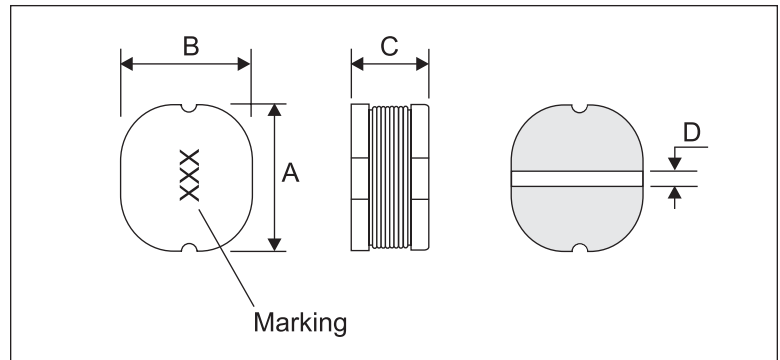

PAD LAYOUT

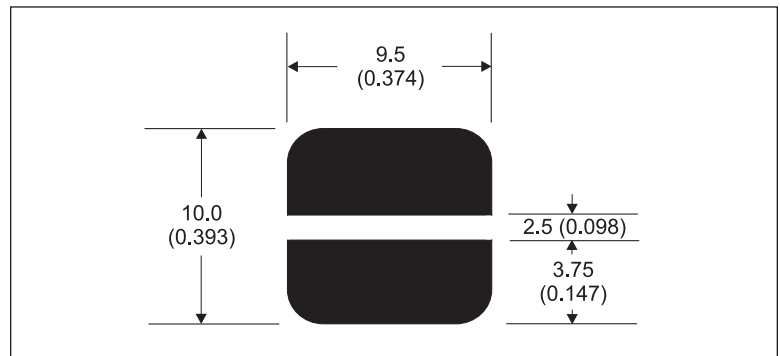

10.19.05



Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US 949-453-1811 Outside US

Copyright © 2004 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice