

# Thermal Cut-offs Resistors

**Cement Resistors with Thermal Cut-offs - FKU/FRU Series**

## Ultimate Protection Thermal Cutoffs for High Power Applications

### ▶ Preview

Fast-acting protection device for high-power applications combines thermal fuse element and resistor on a single substrate.

Token offers FKU (Wirewound Resistor + Thermal Cut-offs) and FRU (Metal Oxide Film Resistor + Thermal Cut-offs) two Series, both are a new concept in thermal fuse technology and are designed to protect against over-heating in electrical products.

The two active components, a thermal cutoff is a fusible alloy and a resistor is a voltage divider, both are surrounded by a ceramic cement with special resin. Under normal operating temperatures the fusible alloy joins the two lead wires within the body of the cutoff and the power resistor acts as a normal function resistor. When the preset temperature of the cutoff is reached, the fusible alloy melts and with the aid of the special resin, complete cutoff is ensured.

By combining a thermal fuse element and resistor on a single substrate, Token has created a fast-acting ultimate protection device for high power applications up to 10A/250V.

Resistance range of FKU Wirewound Type Thermal Cut-offs is  $1\Omega\sim 100\Omega$  and FRU Metal Oxide Film Type Thermal Cut-offs is  $110\Omega\sim 10K\Omega$ . Both standard precision tolerance is  $J(\pm 5\%)$ .

Our custom solutions are designed to address your need for technical and economic success in a timely manner. Contact us with your specific needs.

### ▶ Features



- Miniature size
- Radial leaded form
- Accurate fusing temperature
- Various temperature settings
- Current Rating: Up to 10Amp
- Products with Pb-free Terminations and RoHS compliant
- Economical by combining both function of a thermal fuse and a pulse resistor



### ▶ Applications

- Motors - fans, copiers, washing machines, air conditioners, compressors.
- Electronics - TVs, tape recorders, stereos, video recorders, fluorescent lamps, transformers, surge suppressors, computers, telecommunication equipment.
- Appliances - electric blankets, space heaters, stoves, irons, hair dryers, cookers, toaster ovens, clothes dryers, toasters, mixers, microwave ovens, crock pots.

## General Specifications (Unit: mm)

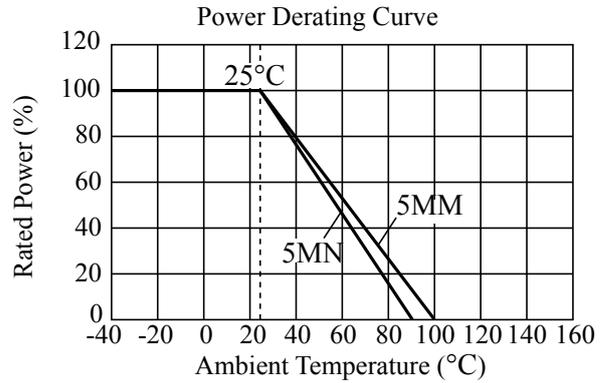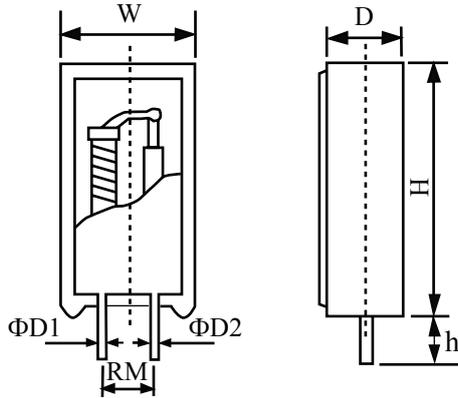


| Type        | Dimension (mm) |       |         |         |         |                |                |
|-------------|----------------|-------|---------|---------|---------|----------------|----------------|
|             | W ± 1          | D ± 1 | H ± 1.5 | RM+2/-1 | h       | D1(R terminal) | D2(F terminal) |
| FKU/FRU-5M  | 13             | 9     | 25      | 5       | 4.5 ± 1 | 0.8±0.1        | 2A:0.6         |
| FKU/FRU-7M  | 13             | 9     | 38      | 5       |         |                | ±0.110A:1.0    |
| FKU/FRU-10M | 16             | 12    | 35      | 7.5     |         |                | ±0.1           |

## Electrical Performance

| Fusing Temperature Protector |                        |                     |                     | Rated Power at 25°C (W) |     |     | Resistance Range(Ω) |         | Tolerance(%)    |       |
|------------------------------|------------------------|---------------------|---------------------|-------------------------|-----|-----|---------------------|---------|-----------------|-------|
| MARK                         | Fusing Temperature(°C) | Standard Current(A) | Standard Voltage(V) | 5M                      | 7M  | 10M | FKU                 | FRU     | FKU             | FRU   |
| A                            | 109+1/-3               | 10                  | 250                 | 1.2                     | 1.4 | 2.0 | 1~100               | 110~10K | J(±5)<br>K(±10) | J(±5) |
| B                            | 129±4                  |                     |                     | 1.6                     | 2.0 | 2.5 |                     |         |                 |       |
| C                            | 152±4                  |                     |                     | 1.6                     | 2.0 | 2.5 |                     |         |                 |       |
| D                            | 188+3/-1               |                     |                     | 2.0                     | 2.4 | 3.5 |                     |         |                 |       |
| E                            | 226+1/-3               |                     |                     | 2.0                     | 2.4 | 3.5 |                     |         |                 |       |
| F                            | 95+3/-0                | 2                   |                     | 0.8                     | 1.2 |     |                     |         |                 |       |
| G                            | 110±4                  |                     |                     | 1.2                     | 1.4 |     |                     |         |                 |       |
| H                            | 126±4                  |                     |                     | 1.4                     | 1.6 |     |                     |         |                 |       |
| N                            | 130±4                  |                     |                     | 1.6                     | 2.0 |     |                     |         |                 |       |
| M                            | 145±4                  |                     |                     | 2.1                     | 2.4 |     |                     |         |                 |       |

## ▶ How to Order

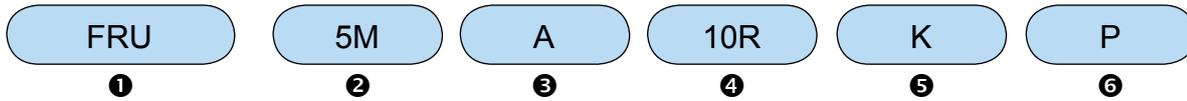

### ❶ Part Number

| Code | Resistance Value                  |
|------|-----------------------------------|
| FRU  | Metal Oxide type Thermal Cut-offs |
| FKU  | Wirewound type Thermal Cut-offs   |

### ❷ Rated Power (W): 5M, 7M, 10M

### ❸ Thermal Cut-offs (°C)

| Code | Thermal Cut-offs |
|------|------------------|
| A    | 109+1/-3°C       |
| B    | 129±4°C          |
| C    | 152±4°C          |
| D    | 188+3/-1°C       |
| E    | 226+1/-3°C       |
| F    | 95+3/-0°C        |
| G    | 110±4°C          |
| H    | 126±4°C          |
| N    | 130±4°C          |
| M    | 145±4°C          |

### ❹ Resistance Value (Ω)

| Code | Resistance Value (Ω) |
|------|----------------------|
| 1R   | 1Ω                   |
| 10R  | 10Ω                  |
| 100R | 100RΩ                |
| 1K   | 1000Ω                |

### ❺ Resistance Tolerance (%)

| Code | Resistance Tolerance (%) |
|------|--------------------------|
| J    | ±5%                      |
| K    | ±10%                     |

### ❻ Package

| Code | Package |
|------|---------|
| P    | Bulk    |

*Back to 1st Page - Thermal Cut-offs Resistors (FKU/FRU)*