



1. CONFIGURATION & DIMENSIONS :

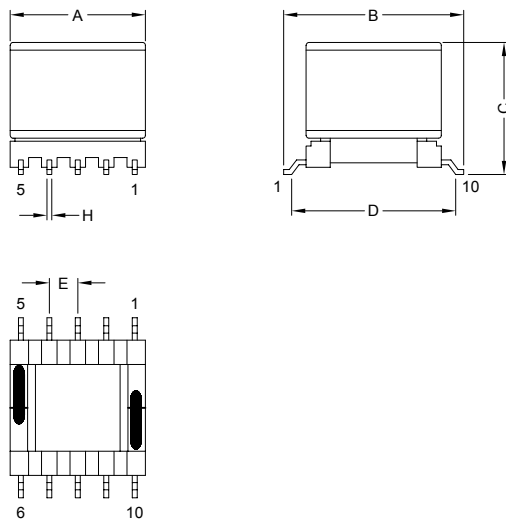

Unit:m/m

A	B	C	D	E	H
13.46 Max.	17.78 Max.	12.19 Max.	15.40±0.15	2.50±0.20	0.70x0.50 Ref.

2. SCHEMATIC :

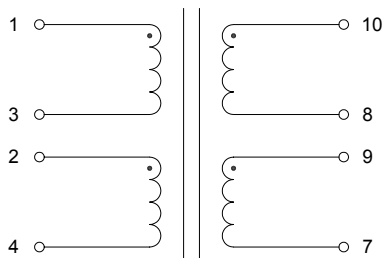

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EP13
- c) Wire : Polyurethane (1UEW)
- d) Tape : Polyester Film
- e) Epoxy : 6611



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEP3HHSF-10087	L : (10-7) = 446.5uH ~ 493.5uH	tie:8+9	10KHz 0.1V	(10-8) = 0.54Ω ~ 0.66Ω
				(2-4) = 0.675Ω ~ 0.825Ω
				(1-3) = 0.675Ω ~ 0.825Ω
				(9-7) = 0.54Ω ~ 0.66Ω



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD