




1. Dimensions:

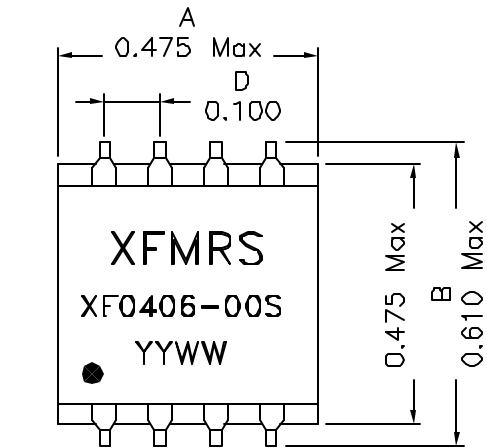


0.018±0.002

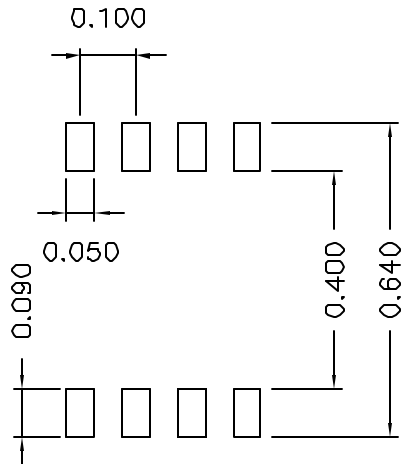

SUGGESTED PAD LAYOUT

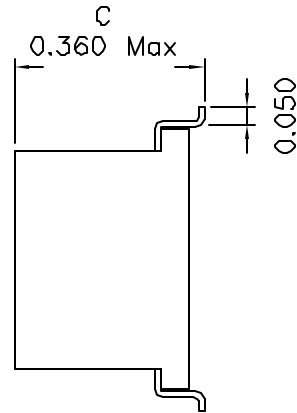

2. Schematic:

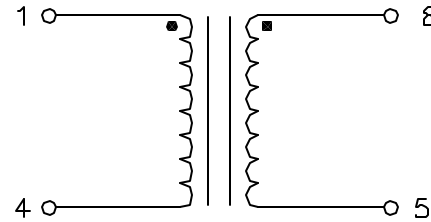

3. Electrical Specifications:

- OCL (P1-4): 40uH Min @100KHz, 1V
- OCL (P1-4): 7uH Min @4MHz, 1V
- URNS RATIO (P1-4:P8-5): 1:2±5%
- INTERWINDING CAPACITANCE: 10pF Max @1MHz
- DC Resistance:
 - PIN(1-4): 0.2 ohms Max
 - PIN(5-8): 0.4 ohms Max
- HIPOT: 1500VAC for 1 minute between P1-8

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from 0°C to +70°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/1

XFMRS Inc.	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF0406-00S	REV. A
.xxx ±0.010	DWN.	李清儿	May-25-04
Dimensions in Inch	CHK.	孙悦	May-25-04
SHEET 1 OF 1	APP.	J Ng	May-25-04