


- Series 419, 430 and 499 double row strips may be cut to any length.
- Spring Target connectors present a large flat surface for making tangent connections to our standard 1,07 dia spring pin plungers. The target connectors provide an excellent gold plated conductive path back to the board mounted spring pin connector.
- Target connectors use MM #1938, #1940, #1941, #1942 and #3024 pins. See page 185 for details.
- Insulators are high temp. thermoplastic.

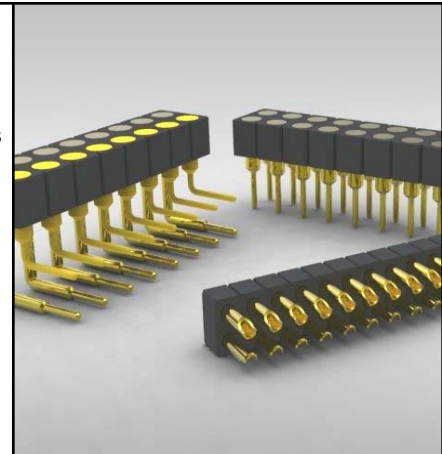

### Ordering Information

<b>Fig. 1</b>	<b>Series 419...041</b>	<b>Surface Mount</b>
	419-10-2__-30-041000	Specify # of pins → 04-64
<b>Fig. 2</b>	<b>Series 419...001</b>	<b>Standard Solder Tails</b>
	419-10-2__-00-001000	Specify # of pins → 04-64
<b>Fig. 3</b>	<b>Series 419...002</b>	<b>Long Solder Tails</b>
	419-10-2__-00-002000	Specify # of pins → 04-64
<b>Fig. 4</b>	<b>Series 419...005</b>	<b>Elevated Solder Tails</b>
	419-10-2__-00-005000	Specify # of pins → 04-64
<b>Fig. 5</b>	<b>Series 430...240</b>	<b>Solder Cups</b>
	430-10-2__-00-240000	Specify # of pins → 04-64
<b>Fig. 6</b>	<b>Series 499...008</b>	<b>Right Angle Solder Tails</b>
	499-10-2__-10-008000	Specify # of pins → 04-64

*For Electrical,  
Mechanical & Environmental  
Data, See pg. 4*



PLATING CODE =	<b>10</b>		
Pin Plating		0,25µm Au	