



1. Mechanical:

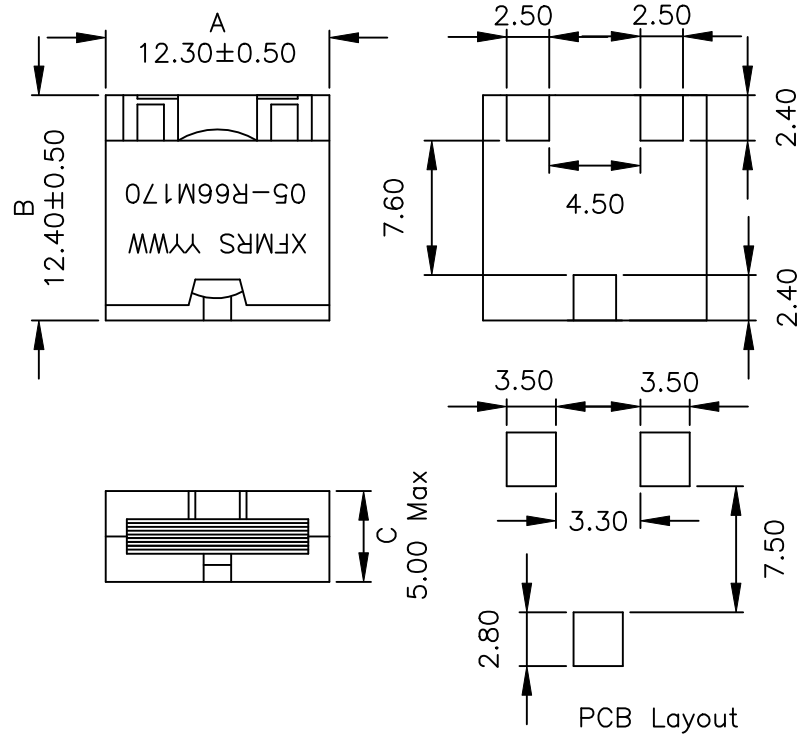

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: -40°C to +85°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 0.66uH±20% @100KHz, 0.25V, 0DC
 CURRENT: 17 ADC Max, OCL DROP BY 15% Max
 DC Res.: 2.50mOhms Max

DOC. REV: A/1

XFMRS Inc	Title: SM INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121205-R66M170	REV. A
TOLERANCES: .xx ±0.25	DWN.	李小锋	Dec-19-01
Dimensions in mm	CHK.	廖玉坤	Dec-19-01
SHEET 1 OF 1	APP.	Joe Huff	Dec-19-01