


- NOTES:**
1. INSULATOR: PBTP UL 94 V-0; GREY
  2. CONTACTS: COPPER ALLOY  
PLATING: GOLD OVER NICKEL  
50 MATING CYCLES
  4. CONNECTOR IS PART MARKED: 122A10859X CONEC ABC

Directive 2002/95/EC  
"RoHS"  
Compliant

**P.C.B. HOLE DRILLINGS**

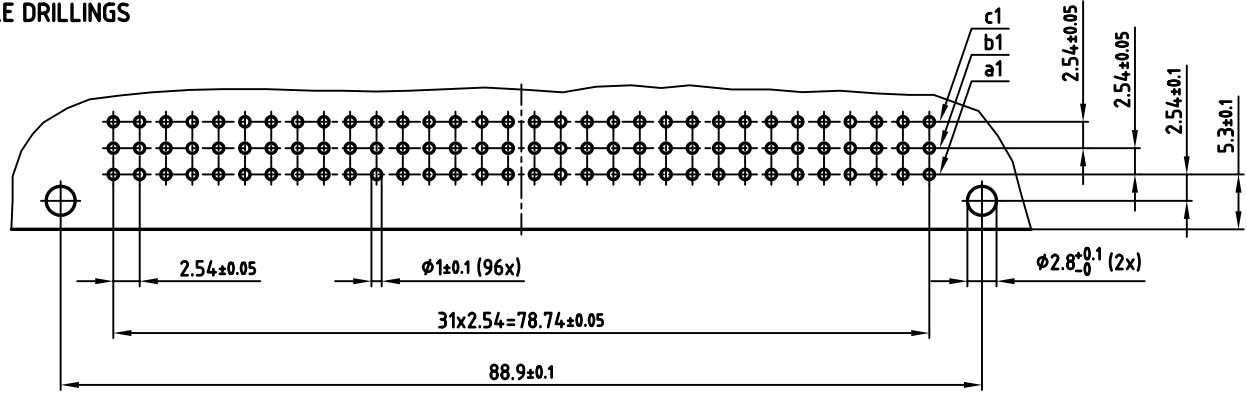

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		scale:	2:1
	dim. in mm	material:	SEE NOTES
2006	date	name	title:
drawn	26.01.	Lehmenkühler	<b>FEMALE CONNECTOR TYPE "R"</b>
appd.	27.01.	Mickenbecker	96pos. ANGLED
norm	DIN EN 60603		dwg no:
d-old			AutoCAD 2004
			DIN-A
			3
			sh: 1/1
			part no: 122A10859X