

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192030158](#)
Status: **Active**
Description: VersaKrimp™ Temp-Term Ring Tongue Terminal for 10 to 12 AWG Wire, Stud Size 3/8"

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E32244

General

Product Family Ring and Spade Terminals
 Series [19203](#)
 Comments 650°F (343°C)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name Temp-Terms, VersaKrimp™
 Type Ring

Physical

Barrel Type Closed - Brazed
 Insulation None
 Material - Plating Mating Tin
 Packaging Type Bag
 Stud Size 3/8" (M9)
 Wire Size AWG 10, 12
 Wire Size mm² 4.00 - 6.00

Material Info

Old Part Number C-T-340-38

Reference - Drawing Numbers

Sales Drawing CTCD30101



*Series
image - Reference only*

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
 Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[19203Series](#)

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool	0640030100
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640070100

NOTES:

① MAT'L: COPPER (STOCK TKN $\frac{.040}{.102}$)


PLATING: WATTS BATH NICKLE (.0002 MIN)

② BRAZED SEAM

③ 650°F MAX. OPERATING TEMP.

STUD SIZES: ($\pm .005$)

- 02 = .094 209 = .209
- 04 = .119 413 = .413
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

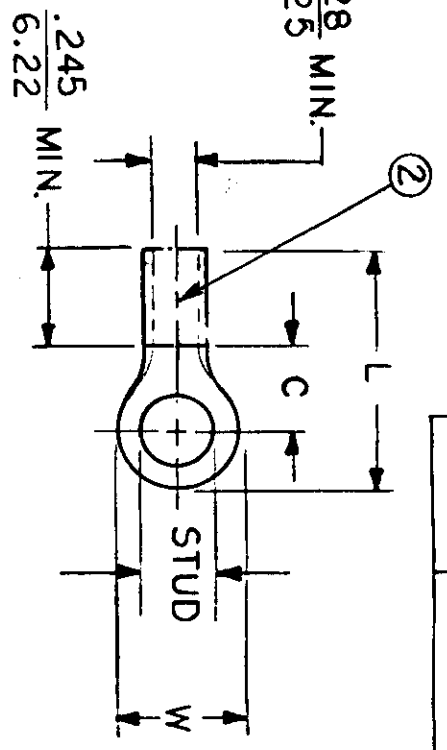

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

WIRE SIZE: 12-10 AWG
4.0-6.0 MM²

PART NUMBER	"W" INCHES	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES			
C-T-301-	$\frac{.750}{19.05}$	$\frac{.611}{15.52}$	$\frac{1.280}{32.51}$	14, 56, 38, 76, 12			
C-T-328-	$\frac{.375}{9.53}$	$\frac{.303}{7.70}$	$\frac{.785}{19.94}$	04, 06, 08, 10, 209			
C-T-330-	$\frac{.530}{13.46}$	$\frac{.393}{9.98}$	$\frac{.952}{24.18}$	10, 14, 56, 38			
C-T-336-	$\frac{.282}{7.16}$	$\frac{.306}{7.77}$	$\frac{.741}{18.82}$	04, 06, 08			
C-T-340-	$\frac{.592}{15.04}$	$\frac{.468}{11.89}$	$\frac{1.056}{26.82}$	10, 14, 56, 38, 209, 413			
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED REFERENCE SCALE: NTS DATE: TITLE: RING TONGUE TEMP-TERM: 650°F MAX. VERSAKRIMP							
FRAC.	DEC.	ANG.	DRWN. BY: JJ	CHKD. BY: GZ	DATE: 11-28-84	DWG. NO. A	CUSTOMER DWG.
±	±	±	APPRD. BY:				

