

# High Frequency Ceramic Solutions

## 868MHz Antenna

P/N 0868AT43A0020

Detail Specification: 06/06/07

Page 1 of 3

### General Specifications

Part Number	0868AT43A0020
Frequency Range	858 - 878 Mhz
Peak Gain	-1.0 dBi typ. (XZ-total)
Average Gain	-4.0 dBi typ. (XZ-total)
Return Loss	9.5 dB min.

Input Power	3W max.
Impedance	50 $\Omega$
Operating Temperature	-40 to +85°C
Reel Quantity	1,000
MSL	2

No.	Function	Terminal Configuration
1	Feeding Point	
2	NC	


### Mechanical Dimensions

	In	mm		
L	0.276 $\pm$ 0.008	7.00 $\pm$ 0.20		
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20		
T	0.031 +.004/-0.008	0.80 +0.1/-0.2		
a	0.020 $\pm$ 0.012	0.50 $\pm$ 0.30		

### Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

\* Line width should be designed to provide 50  $\Omega$  impedance matching characteristics.

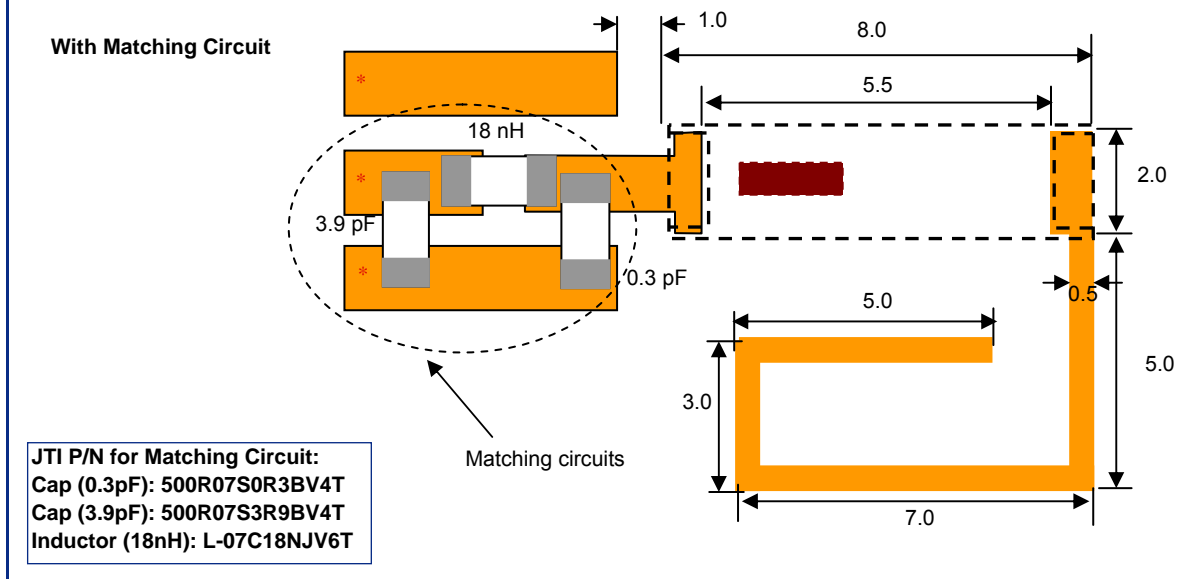

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions


868MHz Antenna

P/N 0868AT43A0020

Detail Specification: 06/06/07

Page 2 of 3

## Mounting Considerations

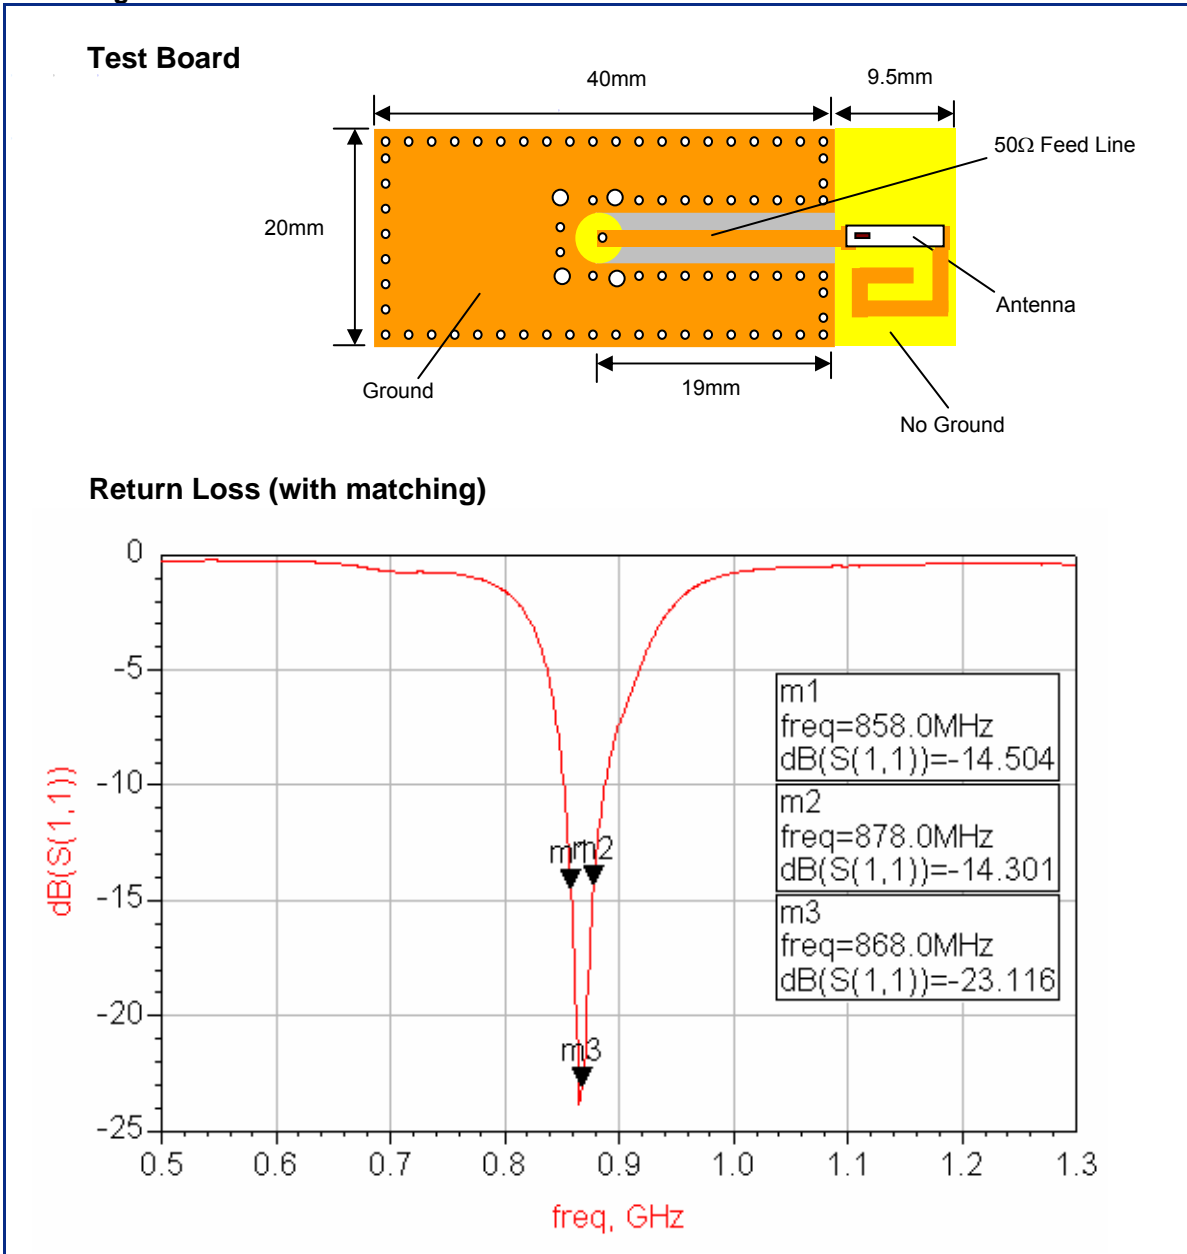

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



# High Frequency Ceramic Solutions


868MHz Antenna

Detail Specification: 06/06/07

P/N 0868AT43A0020

Page 3 of 3

## Typical Radiation Patterns

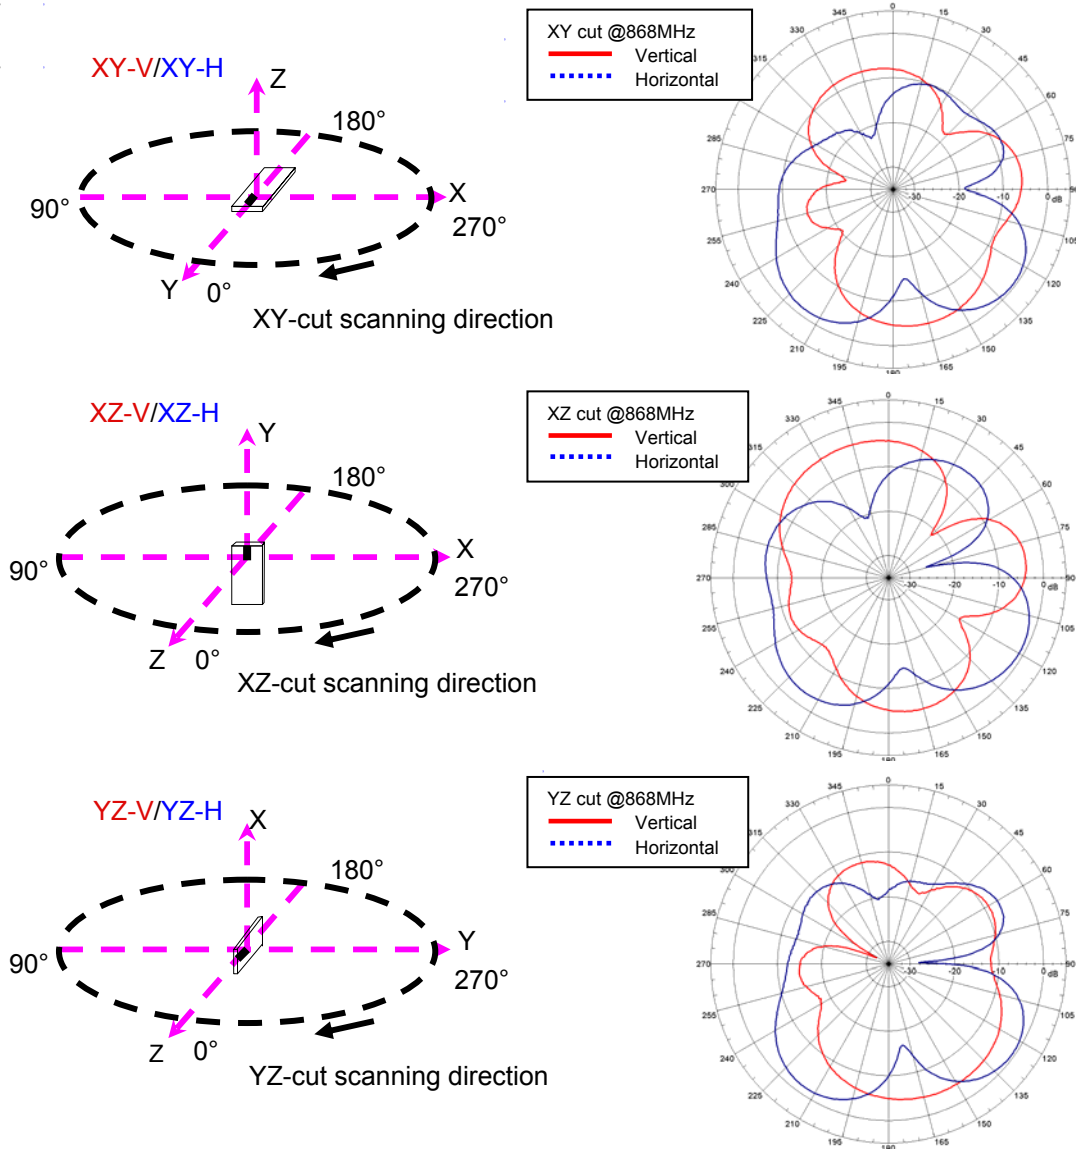

Johanson Technology, Inc. reserves the right to make design changes without notice.  
 All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved