



### FEATURES

- 60 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 14A
- STANDARD 2.0 X 2.0 X 0.4 INCH PACKAGE
- HIGH EFFICIENCY UP TO 90%
- 2:1 WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- APPROVED FOR BASIC INSULATION
- NO MINIMUM LOAD REQUIRED
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

### APPLICATIONS

Wireless Network  
Telecom/Datacom  
Industry Control System  
Measurement Equipment  
Semiconductor Equipment

### OPTIONS

Negative logic Remove On/Off

### DESCRIPTION

The FEC60 series offer 60 watts of output power from a 2.00 x 2.00 x 0.4 inch package. The FEC60 series with 2:1 wide input voltage of 18-36VDC and 36-75VDC and features 1600VDC of isolation, short-circuit and over-voltage protection.

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		60 Watts, max.
Voltage accuracy	FL and nominal Vin	± 1%
Minimum load		0%
Voltage adjustability (Note 6)		± 10%
Line regulation	LL to HL at Full Load	± 0.2%
Load regulation	No Load to Full Load	± 0.5%
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	250µS
Over voltage protection (Voltage clamped)	3.3V output	3.7VDC-5.4VDC
	5V output	5.6VDC-7.0VDC
	12V output	13.8VDC-17.5VDC
	15V output	16.8VDC-20.5VDC
Over load protection	% of FL at nominal input	150%, max.
Short circuit protection		Hiccup, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage (Basic insulation)	Input to Output	1600VDC, min.
	Input(Output) to Case	1600VDC, min.
Case grounding		Connect case to -Vin with decoupling Y Cap
Isolation resistance		10 <sup>9</sup> ohms, min.
Isolation capacitance		1500pF, max.
Switching frequency		300KHz, typ.
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Nickel-coated copper
Base material		FR4 PCB
Potting material		Epoxy (UL94-V0)
Dimensions		2.00 X 2.00 X 0.40 Inch (50.8 X 50.8 X 10.2 mm)
Weight		60g (2.11oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	1.093 x 10 <sup>5</sup> hrs
	MIL-HDBK-217F	1.096 x 10 <sup>5</sup> hrs

INPUT SPECIFICATIONS			
Input voltage range	24V nominal input		18 – 36VDC
	48V nominal input		36 – 75VDC
Input filter			Pi type
Input surge voltage	24V input		50VDC
	100mS max	48V input	100VDC
Input reflected ripple current	Nominal Vin and full load		20mA <sub>p-p</sub>
Start up time	Nominal Vin and constant resistive load	Power up	20mS, max.
		Remote ON/OFF	20mS, max.
Start-up voltage	24V input		17V, typ.
	48V input		34V, typ.
Shutdown voltage	24V input		15V, typ.
	48V input		32V, typ.
Remote ON/OFF (Note 7)			
Positive logic (standard)	DC-DC ON		Open or 3V < Vr < 12V
	DC-DC OFF		Short or 0V < Vr < 1.2V
Negative logic (option)	DC-DC ON		Short or 0V < Vr < 1.2V
	DC-DC OFF		Open or 3V < Vr < 12V
Input current of Remote control pin	Nominal Vin		-0.5mA~1.0mA
Remote off state input current	Nominal Vin		4mA

ENVIRONMENTAL SPECIFICATIONS		
Operating ambient temperature (Note8)	-40°C ~ +40°C (without derating)	+40°C ~ +110°C (with derating)
Maximum case temperature	+110°C	
Storage temperature range	-55°C ~ +125°C	
Over temperature protection	120°C, typ.	
Thermal impedance (Note 9)	Without Heat-sink	10.5°C/Watt
	With Heat-sink	8.4°C/Watt
Thermal shock	MIL-STD-810F	
Vibration	MIL-STD-810F	
Relative humidity	5% to 95% RH	

EMC CHARACTERISTICS			
EMI (Note 10)	EN55022		Class A
ESD	EN61000-4-2	Air	± 8KV
		Contact	± 6KV
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 11)	EN61000-4-4	± 2KV	Perf. Criteria A
Surge (Note 11)	EN61000-4-5	± 1KV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A










Model Number	Input Range	Output Voltage	Output Current		Output <sup>(4)</sup> Ripple & Noise	Input Current		Eff <sup>(4)</sup> (%)	Capacitor <sup>(5)</sup> Load max
			Min. load	Full load		No load <sup>(3)</sup>	Full load <sup>(2)</sup>		
FEC60-24S3P3	18 – 36 VDC	3.3 VDC	0mA	14000mA	75mVp-p	100mA	2264mA	89	36000μF
FEC60-24S05	18 – 36 VDC	5 VDC	0mA	12000mA	75mVp-p	130mA	2941mA	90	20400μF
FEC60-24S12	18 – 36 VDC	12 VDC	0mA	5000mA	100mVp-p	150mA	2907mA	90	3550μF
FEC60-24S15	18 – 36 VDC	15 VDC	0mA	4000mA	100mVp-p	150mA	2907mA	90	2300μF
FEC60-48S3P3	36 – 75 VDC	3.3 VDC	0mA	14000mA	75mVp-p	80mA	1132mA	89	36000μF
FEC60-48S05	36 – 75 VDC	5 VDC	0mA	12000mA	75mVp-p	90mA	1453mA	90	20400μF
FEC60-48S12	36 – 75 VDC	12 VDC	0mA	5000mA	100mVp-p	100mA	1453mA	90	3550μF
FEC60-48S15	36 – 75 VDC	15 VDC	0mA	4000mA	100mVp-p	100mA	1453mA	90	2300μF

**Note**

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- Maximum output deviation is 10% inclusive of remote sense and trim. If remote sense is not being used, the +sense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.
- The ON/OFF control pin voltage is referenced to -Vin.  
To order negative logic ON/OFF control add the suffix-N (Ex: FEC60-48S05-N).
- Test condition with vertical direction by natural convection.
- Heat sink is optional and P/N : 7G-0026C-F.
- The FEC60 series can meet EN55022 Class A with parallel an external capacitor to the input pins.  
Recommend: 24Vin : 6.8μF/50V 1812 MLCC  
48Vin : 2.2μF/100V\*2 PCS 1812 MLCC.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μ F/100V, ESR 48mΩ.

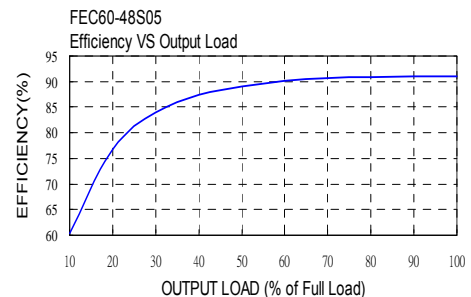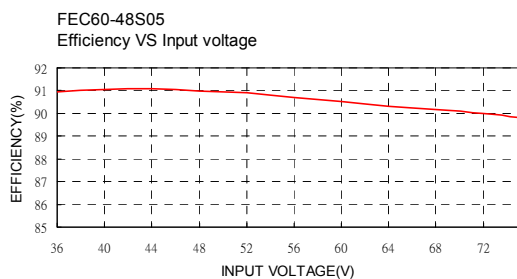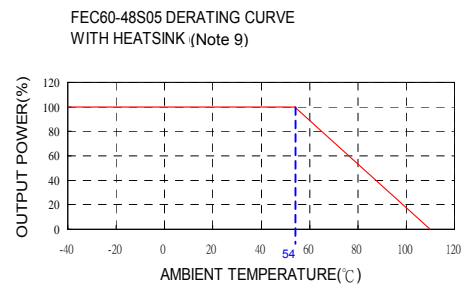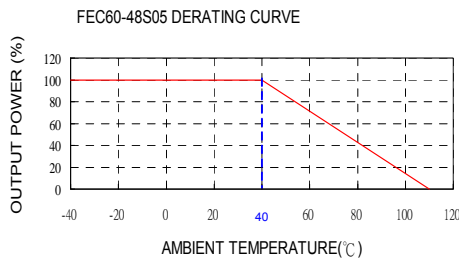


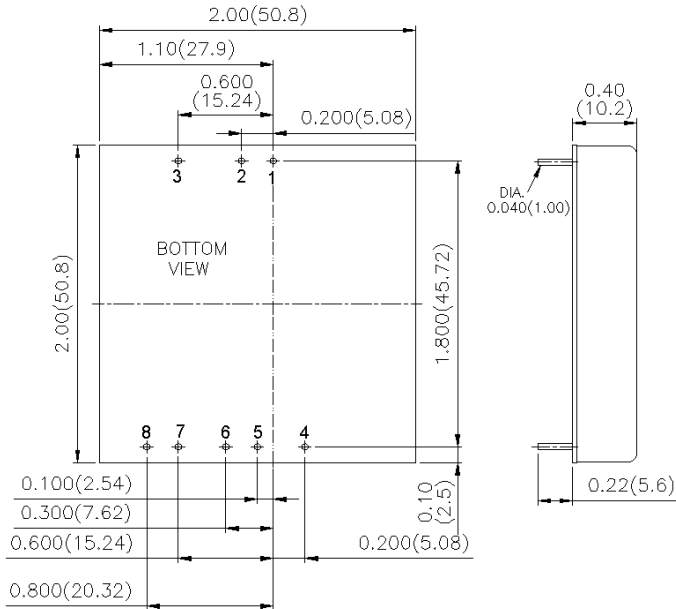


1. All dimensions in Inches (mm)  
Tolerance: X.XX±0.02 (X.X±0.5)  
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

PIN CONNECTION	
PIN	SINGLE
1	+INPUT
2	-INPUT
3	CTRL
4	-SENSE
5	+SENSE
6	+OUTPUT
7	-OUTPUT
8	TRIM

**EXTERNAL OUTPUT TRIMMING**


Output can be externally trimmed by using the method shown below.

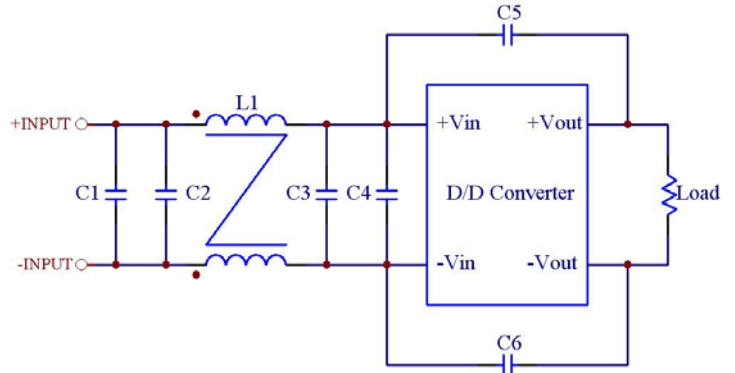

**Recommended Filter for EN55022 Class B Compliance**

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	C5 & C6	L1
FEC60-24xxx	4.7µF/50V 1812MLCC	N/A	4.7µF/50V 1812MLCC	N/A	1000pF/2KV MLCC	450µH Common Choke PMT-048
FEC60-48xxx	2.2µF/100V 1812MLCC	2.2µF/100V 1812MLCC	2.2µF/100V 1812MLCC	N/A	1000pF/2KV MLCC	830µH Common Choke PMT-053

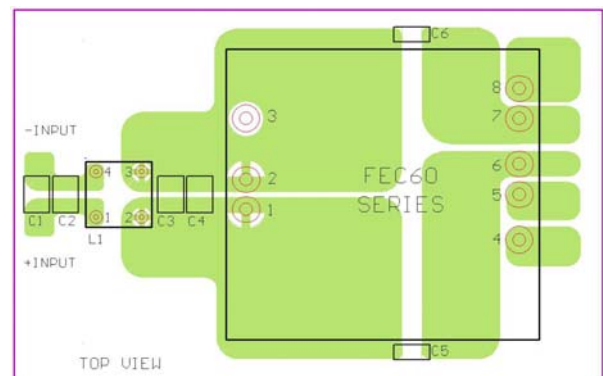

**Recommended EN55022 Class B Filter Circuit Layout**

