


CHOKE COILS

MMICC SERIES



AXIAL LEADED LOOSE

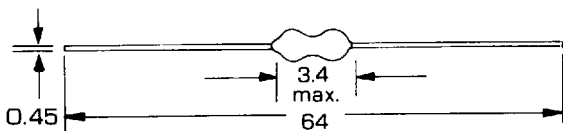

AXIAL PREFORMED



SPECIFICATIONS & STANDARD VALUES

| Ordering Code | Inductance (μ H) Test at 20KHz | Inductance Tolerance (%) | Q min. | Testing Frequency (MHz) | S.R.F. MHz (min) | DC-Res. (Ω) (max) | Rated DC Current (mA) |
|---------------|---|--------------------------------|-----------|-------------------------------|------------------------|----------------------------------|-----------------------------|
| MMICC-1R0 | 1.0 | ±20 | 40 | 7.96 | 150 | 0.5 | 500 |
| MMICC-1R2 | 1.2 | | | | 500 | | |
| MMICC-1R5 | 1.5 | | | | 450 | | |
| MMICC-1R8 | 1.8 | | | | 430 | | |
| MMICC-2R2 | 2.2 | | | | 430 | | |
| MMICC-2R7 | 2.7 | | | | 335 | | |
| MMICC-3R3 | 3.3 | | | | 325 | | |
| MMICC-3R9 | 3.9 | | | | 320 | | |
| MMICC-4R7 | 4.7 | | | | 250 | | |
| MMICC-5R6 | 5.6 | | | | 250 | | |
| MMICC-6R8 | 6.8 | | | | 220 | | |
| MMICC-8R2 | 8.2 | | | | 180 | | |
| MMICC-100 | 10 | | | | 180 | | |
| MMICC-120 | 12 | | | | 165 | | |
| MMICC-150 | 15 | 155 | | | | | |
| MMICC-180 | 18 | 150 | | | | | |
| MMICC-220 | 22 | 148 | | | | | |
| MMICC-270 | 27 | 145 | | | | | |
| MMICC-330 | 33 | 140 | | | | | |
| MMICC-390 | 39 | 135 | | | | | |
| MMICC-470 | 47 | 120 | | | | | |
| MMICC-560 | 56 | 110 | | | | | |
| MMICC-680 | 68 | 100 | | | | | |
| MMICC-820 | 82 | 95 | | | | | |
| MMICC-101 | 100 | 78 | | | | | |

FERRITE