

Millivolt Output Medium Pressure Sensors

Prime Grade
Pressure Sensors

1



Features

- 0 to 0.3 PSI to 0 to 100 PSI Pressure Ranges
- 0.25 % linearity..highest accuracy version
- Temperature Compensated
- Calibrated Zero and Span

Applications

- Medical Instrumentation
- Environmental Controls
- HVAC



General Description

The Millivolt Output pressure sensors is based upon a proprietary packaging technology to reduce output offset or common mode errors. This model provides a calibrated millivolt output with excellent output offset characteristics. In addition the sensor utilizes a silicon, micromachined, stress concentration enhanced structure to provide a very linear output to measured pressure.

These calibrated and temperature compensated sensors give an accurate and stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. The PRIME GRADE is the highest accuracy version of the millivolt output pressure sensors.

The output of the device is ratiometric to the supply voltage and operation from any D.C. supply voltage up to +16 V is acceptable.

Physical Dimensions

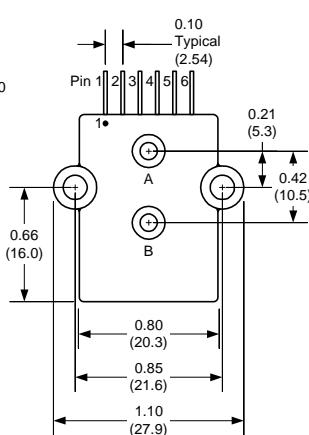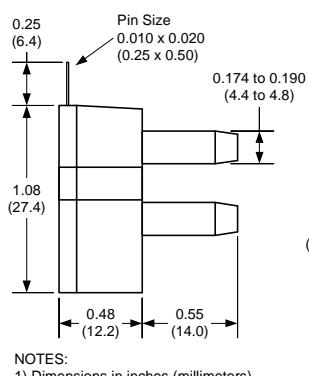

Pressure Sensor Characteristics Maximum Ratings		Environmental Specifications		
Supply Voltage VS	16 Vdc	Temperature Ranges		
Common-mode pressure	50 psig	Compensated	0 to 70° C	
Lead Temperature (soldering 2-4 sec.)	250°C	Operating	-25 to 85° C	
		Storage	-40 to 125° C	
		Humidity Limits	0 to 95% RH (non condensing)	
Standard Pressure Ranges				
Part Number	Operating Pressure	Nominal Span	Proof Pressure	Burst Pressure
0.3 PSI-D-PRIME-MV	0 - 0.3 PSI	20mV	5 PSI	15 PSI
1 PSI-D-PRIME-MV	0 - 1 PSI	18mV	5 PSI	15 PSI
5 PSI-D-PRIME-MV	0 - 5 PSI	60mV	10 PSI	30 PSI
15 PSI-D-PRIME-MV	0 - 15 PSI	90mV	60 PSI	120 PSI
30 PSI-D-PRIME-MV	0 - 30 PSI	90mV	90 PSI	150 PSI
100 PSI-D-PRIME-MV	0 - 100 PSI	100mV	200 PSI	250 PSI
15 PSI-A-PRIME-MV	0 - 15 PSIA	60mV	60 PSIA	120 PSI
Performance Characteristics for 0.3 PSI-D-PRIME-MV				
Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure	0.3			PSI
Output Span, note 5	19.8	20.0	20.2	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4	0.1	0.25		%fs
Span Shift (0°C-70°C), note 2			±1	%fs
Performance Characteristics for 1 PSI-D-PRIME-MV				
Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure	1.0			PSI
Output Span, note 5	17.82	18.0	18.18	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4	0.1	0.25		%fs
Span Shift (0°C-70°C), note 2			±1	%fs

Performance Characteristics for 5 PSI-D-PRIME-MV

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		5.0		PSI
Output Span, note 5	59.4	60.0	60.6	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4		0.1	0.25	%fs
Span Shift (0°C-70°C), note 2			±1	%fs

Performance Characteristics for 15 PSI-D-PRIME-MV

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		15.0		PSI
Output Span, note 5	89.1	90.0	90.9	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4		0.15	0.30	%fs
Span Shift (0°C-70°C), note 2			±1	%fs

Performance Characteristics for 30 PSI-D-PRIME-MV

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		30.0		PSI
Output Span, note 5	89.1	90.0	90.9	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4		0.15	0.30	%fs
Span Shift (0°C-70°C), note 2			±1	%fs

Performance Characteristics for 100 PSI-D-PRIME-MV

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		100.0		PSI
Output Span, note 5	99	100	101	mV
Offset Voltage @ zero differential pressure			±0.3	mV
Offset Temperature Shift (0°C-70°C), note 2			±250	uV
Linearity, hysteresis error, note 4		0.15	0.30	%fs
Span Shift (0°C-70°C), note 2			±1	%fs