



Approved by:

Checked by:

Issued by:

SPECIFICATION

PRODUCT: SAW FILTER


MODEL: HF738901N (K7257D) SIP5D

HOPE MICROELECTRONICS CO.,LIMITED


1. Construction

1.1 Dimension and materials

Type : F738901N

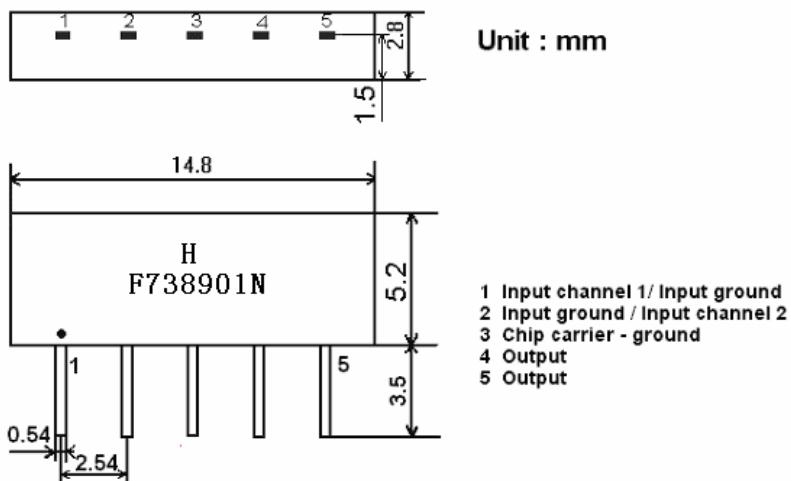

1.2. Circuit construction, measurement circuit

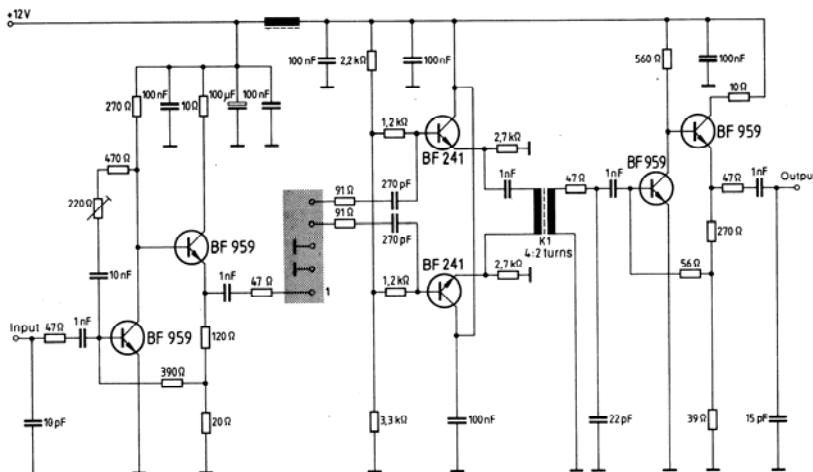

Test circuit for SIP-5 filter

Input impedance of the symmetrical post-amplifier: 2 k Ω in parallel with 3 pF

2. Characteristics

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15°C to 35°C

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter

can be operated continuously. -10°C ~ +60°C

Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40°C ~ +70°C

Reference temperature +25°C

2.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

2.2 Electrical Characteristics

Characteristics in B/G,L/L' mode (switching input pin 2 connected to ground pin 3)

Source impedance $Z_s=50 \Omega$

Load impedance $Z_L=2k \Omega //3pF$ $T_A=25^\circ C$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	37.40MHz	14.5	16.5	18.5	dB
Relative attenuation	38.90MHz	4.5	6.0	7.5	dB
	33.90MHz	-	7.9	-	dB
	34.47MHz	-1.0	0.5	2.0	dB
	33.40MHz	28.0	40.0	-	dB
	33.05MHz	-	36.0	-	dB
	30.90MHz	42.0	55.0	-	dB
	31.90MHz	42.0	56.0	-	dB
	32.40MHz	42.0	54.0	-	dB
	40.15MHz	35.0	47.0	-	dB
	40.40MHz	40.0	50.0	-	dB
	41.40MHz	40.0	50.0	-	dB
Sidelobe	25.00~31.90MHz	35.0	44.0	-	dB
	40.40~45.00MHz	35.0	41.0	-	dB
Reflected wave signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)		40.0	50.0		dB
Feedthrough signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)		42.0	52.0		dB
Temperature coefficient			-72		ppm/k

Characteristics in M/N mode (switching input pin 2 connected to input pin 1)

Source impedance $Z_s=50 \Omega$

Load impedance

 $Z_L=2k\ \Omega //3pF$ $T_A=25^\circ C$

Item	Freq	min	Typ	max	
Insertion attenuation Reference level	37.40MHz	14.5	16.5	18.5	dB
Relative attenuation	38.90MHz	4.9	6.4	7.9	dB
	35.32MHz	1.1	2.6	4.1	dB
	34.40MHz	22.0	35.0	-	dB
	32.90MHz	35.0	42.0	-	dB
	40.40MHz	40.0	47.0	-	dB
Sidelobe	25.00~32.90MHz	33.0	41.0		dB
	39.50~45.00MHz	30.0	37.0		dB
Reflected wave signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)	40.0	50.0			dB
Feedthrough signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 37.40 MHz)	-	48.0			dB
Temperature coefficient		-72			ppm/k

2.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260°C for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More than 95% of total area of the pins should be covered with solder

2.4 Mechanical Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0


Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0

2.5 Voltage Discharge Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	<1.0

3.6 Frequency response

Frequency response in B/G,L/L' mode

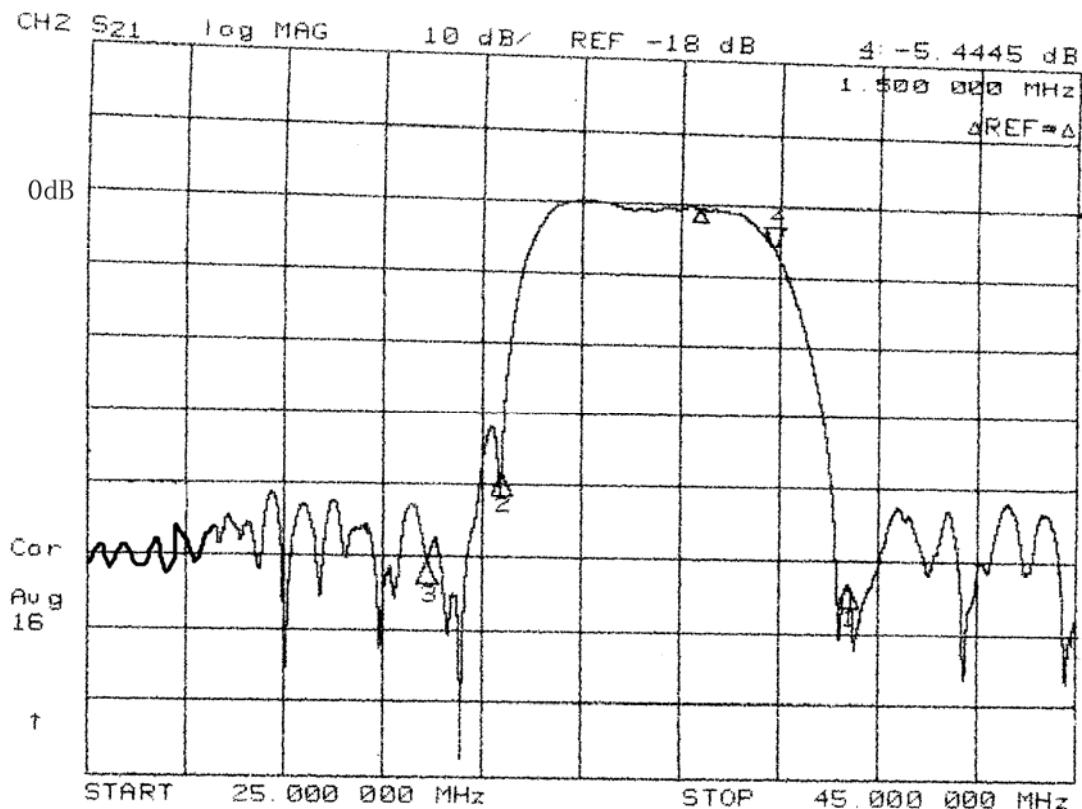


CH1 S₂₁ log MAG
CH2 S₂₁ delay 1 dB/
30 ns/ REF ~18 dB
2: - .0099 dB
2 -389.26 ps

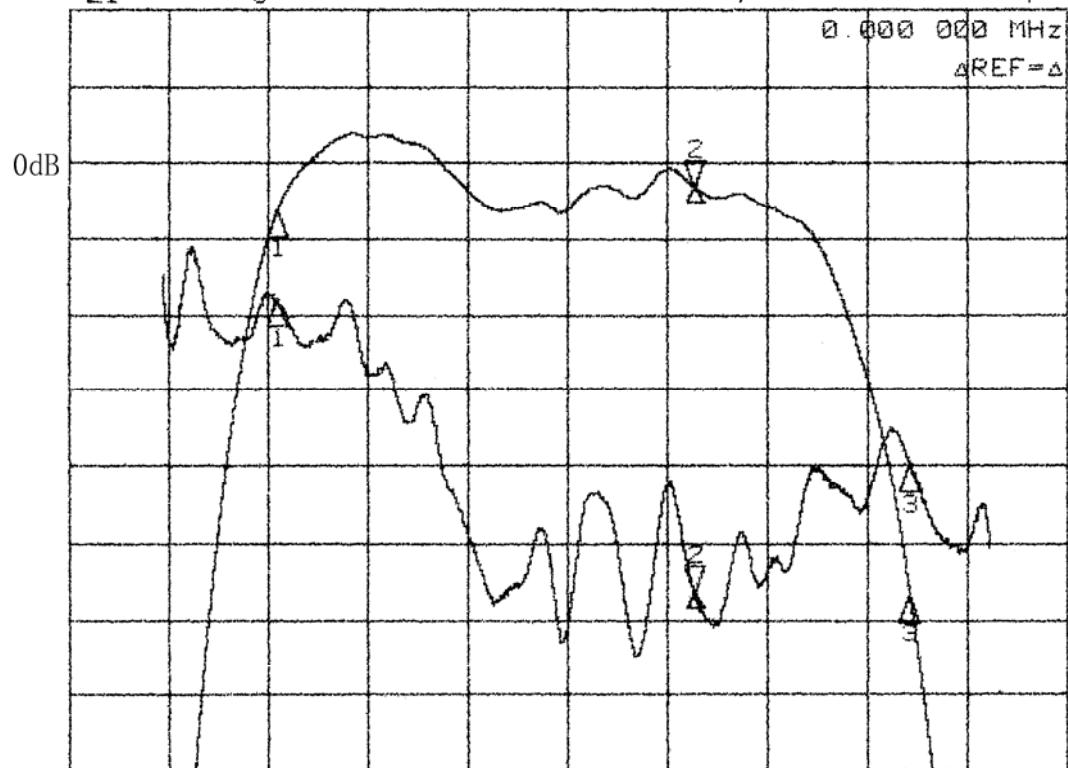

START 33.000 000 MHz

STOP 40.000 000 MHz


CH2 S₂₁ log MAG 10 dB/ REF -25.4 dB

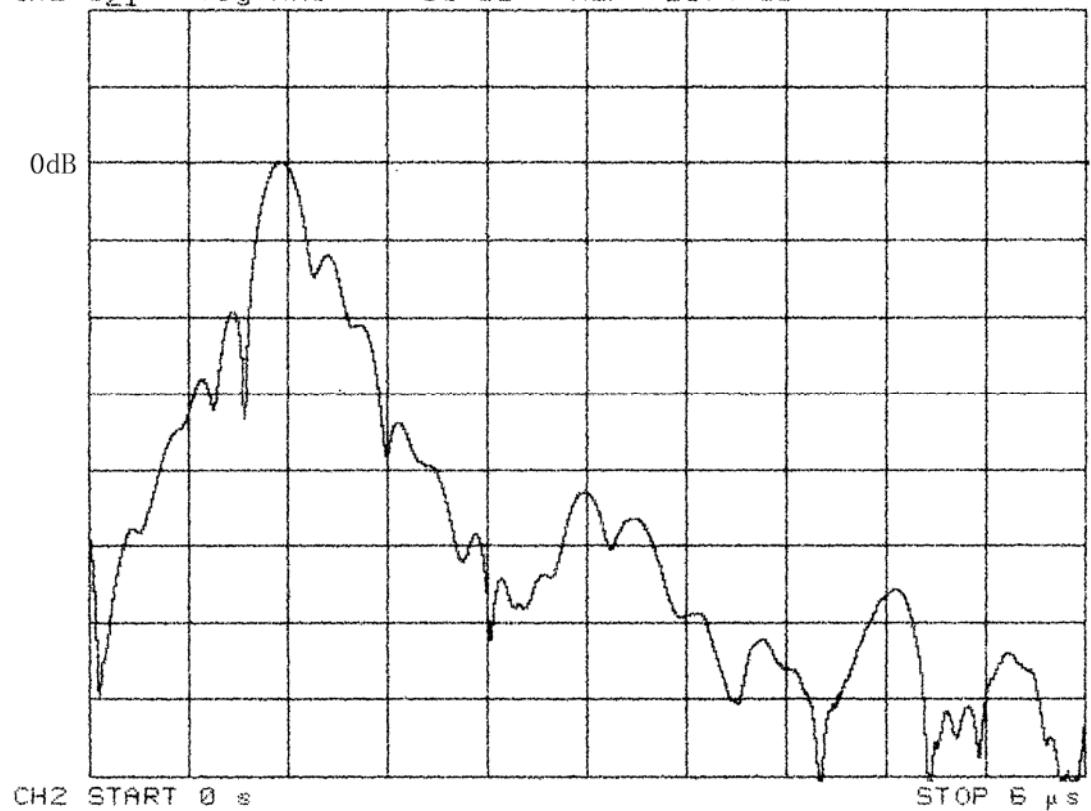

CH2 START 0 s

STOP 6 μs

Frequency response in B/G,L/L' mode

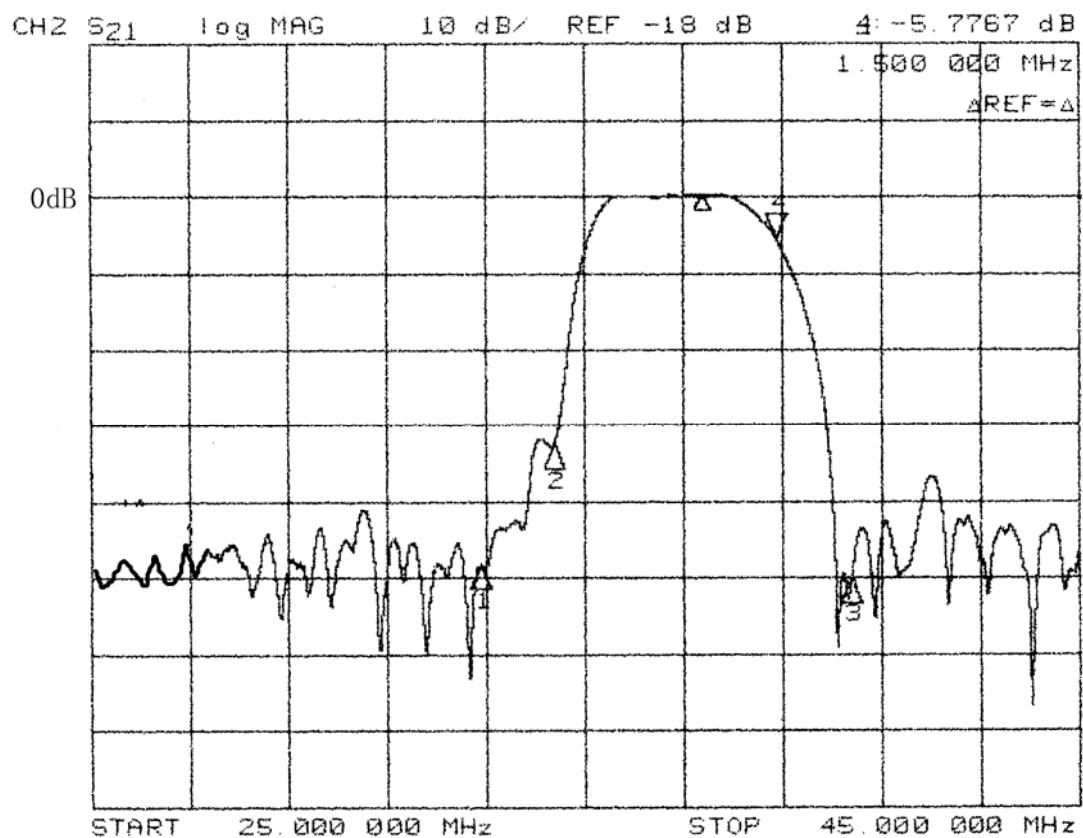


CH1 S21 log MAG
CH2 S21 delay

1 dB/
30 ns/
REF 1.254 μ s

2: .0054 dB
Z -140.06 ps

0.000 000 MHz
AREF=Δ

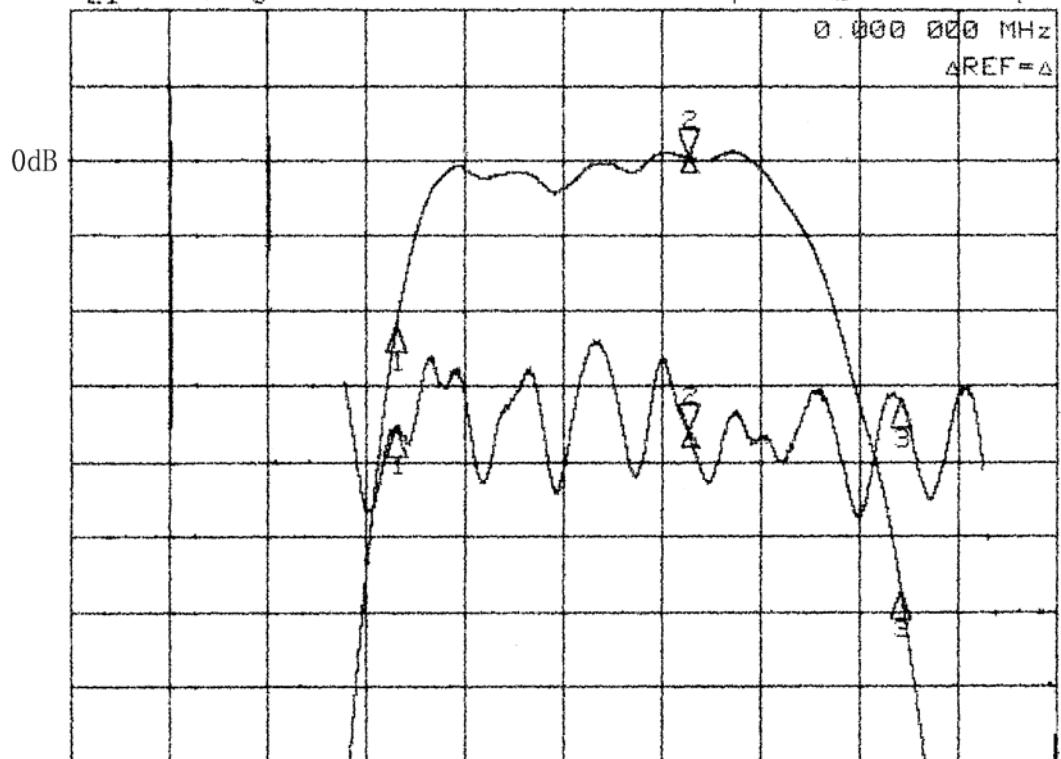

START 33.000 000 MHz

STOP 40.000 000 MHz

CH2 S21 log MAG 10 dB/
REF -26.62 dB

