


SS1.5-12 ⇒ SS1.5-36


Part nos 708-4146 ⇒ 4237

SPUR GEARS (SS)

SS

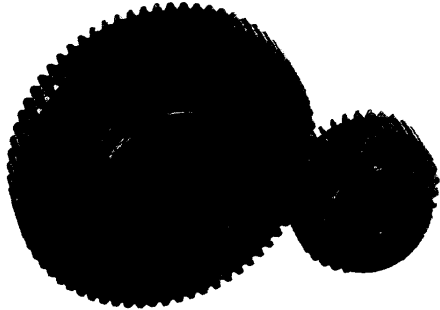

z = no of teeth.

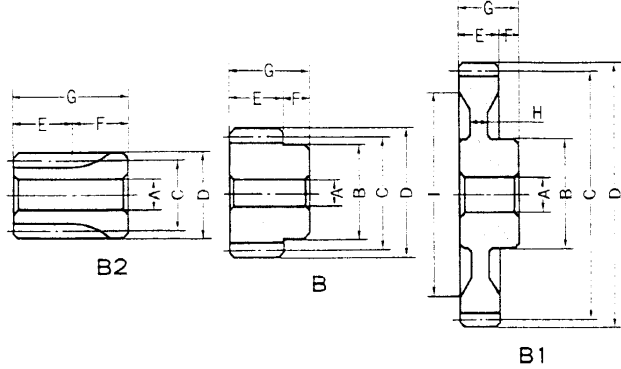

■ m1.5 Material: S45C(Steel) 20° Pressure Angle Face width: 15 mm

Catalog No.	z	AH7	B	C	D	E	F	G	H	I	(Type) Weight-kgf	
SS1.5-12	12	8	21	18.0	21.0	15	15	30	—	—	(B2) 0.05	708-4146
SS1.5-13	13	8	22.5	19.5	22.5	15	15	30	—	—	(B2) 0.07	
SS1.5-14	14	8	16	21.0	24.0	15	10	25	—	—	(B) 0.06	
SS1.5-15	15	8	18	22.5	25.5	15	10	25	—	—	(B) 0.06	708-4158
SS1.5-16	16	8	20	24.0	27.0	15	10	25	—	—	(B) 0.07	708-4160
SS1.5-17	17	8	21	25.5	28.5	15	10	25	—	—	(B) 0.09	
SS1.5-18	18	8	22	27.0	30.0	15	10	25	—	—	(B) 0.09	708-4171
SS1.5-19	19	8	23	28.5	31.5	15	10	25	—	—	(B) 0.11	
SS1.5-20	20	8	24	30.0	33.0	15	10	25	—	—	(B) 0.12	708-4183
SS1.5-21	21	8	25	31.5	34.5	15	10	25	—	—	(B) 0.13	
SS1.5-22	22	8	26	33.0	36.0	15	10	25	—	—	(B) 0.15	708-4195
SS1.5-23	23	8	27	34.5	37.5	15	10	25	—	—	(B) 0.18	
SS1.5-24	24	8	28	36.0	39.0	15	10	25	—	—	(B) 0.19	708-4201
SS1.5-25	25	8	30	37.5	40.5	15	10	25	—	—	(B) 0.20	
SS1.5-26	26	10	32	39.0	42.0	15	10	25	—	—	(B) 0.21	
SS1.5-27	27	10	34	40.5	43.5	15	10	25	—	—	(B) 0.23	
SS1.5-28	28	10	36	42.0	45.0	15	10	25	—	—	(B) 0.24	
SS1.5-29	29	10	37	43.5	46.5	15	10	25	—	—	(B) 0.25	
SS1.5-30	30	10	38	45.0	48.0	15	10	25	—	—	(B) 0.26	708-4213
SS1.5-32	32	10	40	48.0	51.0	15	10	25	—	—	(B) 0.30	708-4225
SS1.5-34	34	10	40	51.0	54.0	15	10	25	—	—	(B) 0.33	
SS1.5-35	35	10	42	52.5	55.5	15	10	25	—	—	(B) 0.34	
SS1.5-36	36	10	45	54.0	57.0	15	10	25	—	—	(B) 0.39	708-4237
SS1.5-38	38	12	45	57.0	60.0	15	10	25	—	—	(B) 0.43	
SS1.5-40	40	12	45	60.0	63.0	15	10	25	—	—	(B) 0.44	
SS1.5-42	42	12	45	63.0	66.0	15	10	25	—	—	(B) 0.47	
SS1.5-44	44	12	45	66.0	69.0	15	10	25	—	—	(B) 0.51	
SS1.5-45	45	12	45	67.5	70.5	15	10	25	—	—	(B) 0.52	
SS1.5-46	46	12	45	69.0	72.0	15	10	25	—	—	(B) 0.57	
SS1.5-48	48	12	45	72.0	75.0	15	10	25	—	—	(B) 0.58	
SS1.5-50	50	12	45	75.0	78.0	15	10	25	—	—	(B) 0.62	
SS1.5-52	52	15	50	78.0	81.0	15	10	25	—	—	(B) 0.70	
SS1.5-54	54	15	50	81.0	84.0	15	10	25	—	—	(B) 0.74	
SS1.5-55	55	15	50	82.5	85.5	15	10	25	—	—	(B) 0.75	
SS1.5-56	56	15	50	84.0	87.0	15	10	25	—	—	(B) 0.77	
SS1.5-58	58	15	50	87.0	90.0	15	10	25	—	—	(B) 0.86	
SS1.5-60	60	15	50	90.0	93.0	15	10	25	—	—	(B) 0.87	
SS1.5-62	62	15	55	93.0	96.0	15	10	25	—	—	(B) 0.99	
SS1.5-64	64	15	55	96.0	99.0	15	10	25	—	—	(B) 1.0	
SS1.5-65	65	15	55	97.5	100.5	15	10	25	—	—	(B) 1.0	
SS1.5-66	66	15	55	99.0	102.0	15	10	25	—	—	(B) 1.1	
SS1.5-68	68	15	55	102.0	105.0	15	10	25	—	—	(B) 1.1	
SS1.5-70	70	15	55	105.0	108.0	15	10	25	—	—	(B) 1.2	
SS1.5-72	72	15	55	108.0	111.0	15	10	25	—	—	(B) 1.2	
SS1.5-75	75	15	60	112.5	115.5	15	10	25	—	—	(B) 1.4	
SS1.5-76	76	15	60	114.0	117.0	15	10	25	—	—	(B) 1.5	
SS1.5-80	80	15	60	120.0	123.0	15	10	25	—	—	(B) 1.5	
SS1.5-84	84	15	60	126.0	129.0	15	10	25	—	—	(B) 1.7	
SS1.5-85	85	15	60	127.5	130.0	15	10	25	—	—	(B) 1.7	
SS1.5-88	88	15	60	132.0	135.0	15	10	25	—	—	(B) 1.9	
SS1.5-90	90	15	60	135.0	138.0	15	10	25	—	—	(B) 1.9	
SS1.5-95	95	15	60	142.5	145.5	15	10	25	—	—	(B) 2.1	
SS1.5-100	100	15	60	150.0	153.0	15	10	25	—	133	(B) 1.8	
SS1.5-120	120	15	70	180.0	183.0	15	10	25	10	153	(B) 2.8	
SS1.5-150	150	20	180	225.0	228.0	15	10	25	—	—	(B) 6.62	
SS1.5-200	200	25	240	300.0	303.0	15	10	25	—	—	(B) 11.8	