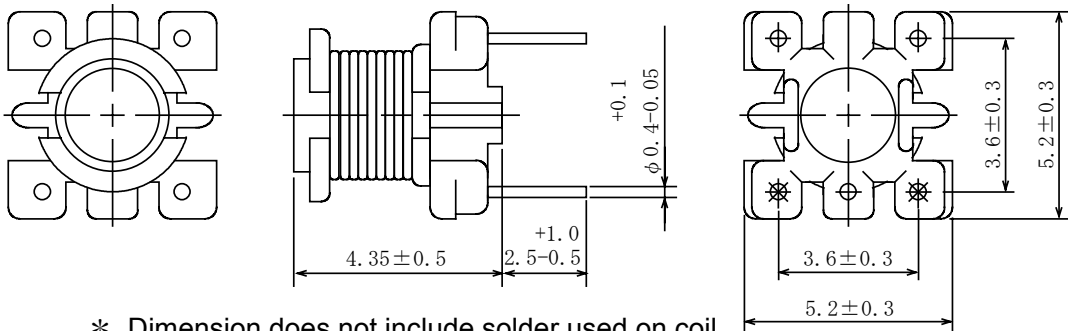


**Type: S54N**
**◆ Product Description**


- 5.5×5.5mm Max.(L×W), 4.85mm Max. Height.
- Operating frequency:150MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

**◆ Feature**

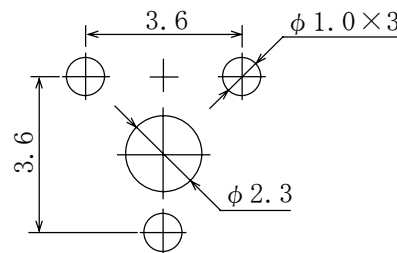
- Variable unshielded type.
- RoHS Compliance

**◆ Dimensions (mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.

**◆ Connection (Bottom View)**


“S” is winding start.

**◆ Terminal Layout**

**◆ Specification (Part No.S0995472)**

Item	(4-6)	Measuring Condition
Tuning Capacity	30.2 pF $\pm$ 5 % Within	100MHz
Unloaded Qu	45 Min.	100MHz
Using Frequency: 86.7 ~ 118.7 MHz		